GAWK: Effective AWK Programming

A User's Guide for GNU Awk
Edition 3
June, 2004

Arnold D. Robbins

"To boldly go where no man has gone before" is a Registered Trademark of Paramount Pictures Corporation.

Published by:

Free Software Foundation
59 Temple Place — Suite 330
Boston, MA 02111-1307 USA
Phone: +1-617-542-5942
Fax: +1-617-542-2652
Email: gnu@gnu.org
URL: http://www.gnu.org/

ISBN 1-882114-28-0

Copyright © 1989, 1991, 1992, 1993, 1996, 1997, 1998, 1999, 2000, 2001, 2002, 2003 Free Software Foundation, Inc.

This is Edition 3 of *GAWK: Effective AWK Programming: A User's Guide for GNU Awk*, for the 3.1.4 (or later) version of the GNU implementation of AWK.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with the Invariant Sections being "GNU General Public License", the Front-Cover texts being (a) (see below), and with the Back-Cover Texts being (b) (see below). A copy of the license is included in the section entitled "GNU Free Documentation License".

a. "A GNU Manual"

b. "You have freedom to copy and modify this GNU Manual, like GNU software. Copies published by the Free Software Foundation raise funds for GNU development."

Cover art by Etienne Suvasa.

To Miriam, for making me complete.

To Chana, for the joy you bring us.

To Rivka, for the exponential increase.

To Nachum, for the added dimension.

To Malka, for the new beginning.

Short Contents

Foreword 1
Preface 3
1 Getting Started with `awk` 11
2 Regular Expressions 24
3 Reading Input Files 36
4 Printing Output 57
5 Expressions 73
6 Patterns, Actions, and Variables 93
7 Arrays in `awk` 116
8 Functions 127
9 Internationalization with `gawk` 156
10 Advanced Features of `gawk` 165
11 Running `awk` and `gawk` 173
12 A Library of `awk` Functions 181
13 Practical `awk` Programs 210
A The Evolution of the `awk` Language 252
B Installing `gawk` 260
C Implementation Notes 279
D Basic Programming Concepts 294
Glossary 299
GNU General Public License 309
GNU Free Documentation License 315
Index 322

Table of Contents

Foreword 1

Preface 3

History of `awk` and `gawk` 3
A Rose by Any Other Name 4
Using This Book 5
Typographical Conventions 6
The GNU Project and This Book 7
How to Contribute 8
Acknowledgments 8

1 Getting Started with `awk` 11

1.1 How to Run `awk` Programs 11
1.1.1 One-Shot Throwaway `awk` Programs 11
1.1.2 Running `awk` Without Input Files 12
1.1.3 Running Long Programs 12
1.1.4 Executable `awk` Programs 13
1.1.5 Comments in `awk` Programs 14
1.1.6 Shell-Quoting Issues 14
1.2 Data Files for the Examples 16
1.3 Some Simple Examples 17
1.4 An Example with Two Rules 19
1.5 A More Complex Example 20
1.6 `awk` Statements Versus Lines 20
1.7 Other Features of `awk` 22
1.8 When to Use `awk` 22

2 Regular Expressions 24

2.1 How to Use Regular Expressions 24
2.2 Escape Sequences 25
2.3 Regular Expression Operators 27
2.4 Using Character Lists 29
2.5 `gawk`-Specific Regexp Operators 31
2.6 Case Sensitivity in Matching 32
2.7 How Much Text Matches? 33
2.8 Using Dynamic Regexps 34
2.9 Where You Are Makes A Difference 35

3 Reading Input Files 36

3.1 How Input Is Split into Records 36
3.2 Examining Fields 39
3.3 Nonconstant Field Numbers 40
3.4 Changing the Contents of a Field 41
3.5 Specifying How Fields Are Separated 43
3.5.1 Using Regular Expressions to Separate Fields 44
3.5.2 Making Each Character a Separate Field 44
3.5.3 Setting `FS` from the Command Line 45
3.5.4 Field-Splitting Summary 46
3.6 Reading Fixed-Width Data 47
3.7 Multiple-Line Records 49
3.8 Explicit Input with `getline` 51
3.8.1 Using `getline` with No Arguments 51
3.8.2 Using `getline` into a Variable 52
3.8.3 Using `getline` from a File 53
3.8.4 Using `getline` into a Variable from a File 53
3.8.5 Using `getline` from a Pipe 54
3.8.6 Using `getline` into a Variable from a Pipe 55
3.8.7 Using `getline` from a Coprocess 55
3.8.8 Using `getline` into a Variable from a Coprocess 55
3.8.9 Points to Remember About `getline` 56
3.8.10 Summary of `getline` Variants 56

4 Printing Output 57

4.1 The `print` Statement 57
4.2 Examples of `print` Statements 57
4.3 Output Separators 59
4.4 Controlling Numeric Output with `print` 59
4.5 Using `printf` Statements for Fancier Printing 60
4.5.1 Introduction to the `printf` Statement 60
4.5.2 Format-Control Letters 60
4.5.3 Modifiers for `printf` Formats 61
4.5.4 Examples Using `printf` 64
4.6 Redirecting Output of `print` and `printf` 65
4.7 Special File Names in `gawk` 67
4.7.1 Special Files for Standard Descriptors 68
4.7.2 Special Files for Process-Related Information 69
4.7.3 Special Files for Network Communications 69
4.7.4 Special File Name Caveats 70
4.8 Closing Input and Output Redirections 70

5 Expressions 73

5.1 Constant Expressions 73
5.1.1 Numeric and String Constants 73
5.1.2 Octal and Hexadecimal Numbers 73
5.1.3 Regular Expression Constants 74
5.2 Using Regular Expression Constants 74
5.3 Variables 76
5.3.1 Using Variables in a Program 76
5.3.2 Assigning Variables on the Command Line 76
5.4 Conversion of Strings and Numbers 77
5.5 Arithmetic Operators 78
5.6 String Concatenation 80
5.7 Assignment Expressions 81
5.8 Increment and Decrement Operators 83
5.9 True and False in `awk` 85
5.10 Variable Typing and Comparison Expressions 85
5.11 Boolean Expressions 88
5.12 Conditional Expressions 89
5.13 Function Calls 89
5.14 Operator Precedence (How Operators Nest) 90

6 Patterns, Actions, and Variables 93

6.1 Pattern Elements 93
6.1.1 Regular Expressions as Patterns 93
6.1.2 Expressions as Patterns 93
6.1.3 Specifying Record Ranges with Patterns 95
6.1.4 The `BEGIN` and `END` Special Patterns 96
6.1.4.1 Startup and Cleanup Actions 96
6.1.4.2 Input/Output from `BEGIN` and `END` Rules 97
6.1.5 The Empty Pattern 97
6.2 Using Shell Variables in Programs 97
6.3 Actions 98
6.4 Control Statements in Actions 99
6.4.1 The `if-else` Statement 99
6.4.2 The `while` Statement 100
6.4.3 The `do-while` Statement 101
6.4.4 The `for` Statement 101
6.4.5 The `switch` Statement 102
6.4.6 The `break` Statement 103
6.4.7 The `continue` Statement 104
6.4.8 The `next` Statement 105
6.4.9 Using `gawk`'s `nextfile` Statement 106
6.4.10 The `exit` Statement 106
6.5 Built-in Variables 107
6.5.1 Built-in Variables That Control `awk` 107
6.5.2 Built-in Variables That Convey Information 110
6.5.3 Using `ARGC` and `ARGV` 113

7 Arrays in `awk` 116

7.1 Introduction to Arrays 116
7.2 Referring to an Array Element 117
7.3 Assigning Array Elements 118
7.4 Basic Array Example 118
7.5 Scanning All Elements of an Array 119
7.6 The `delete` Statement 120
7.7 Using Numbers to Subscript Arrays 121
7.8 Using Uninitialized Variables as Subscripts 122
7.9 Multidimensional Arrays 122
7.10 Scanning Multidimensional Arrays 124
7.11 Sorting Array Values and Indices with `gawk` 124

8 Functions 127

8.1 Built-in Functions 127
8.1.1 Calling Built-in Functions 127
8.1.2 Numeric Functions 127
8.1.3 String-Manipulation Functions 129
8.1.3.1 More About '\' and '`&`' with `sub`, `gsub`, and `gensub` 136
8.1.4 Input/Output Functions 140
8.1.5 Using `gawk`'s Timestamp Functions 142
8.1.6 Bit-Manipulation Functions of `gawk` 147
8.1.7 Using `gawk`'s String-Translation Functions 149
8.2 User-Defined Functions 149
8.2.1 Function Definition Syntax 149
8.2.2 Function Definition Examples 151
8.2.3 Calling User-Defined Functions 152
8.2.4 The `return` Statement 154
8.2.5 Functions and Their Effects on Variable Typing 155

9 Internationalization with `gawk` 156

9.1 Internationalization and Localization 156
9.2 GNU `gettext` 156
9.3 Internationalizing `awk` Programs 158
9.4 Translating `awk` Programs 159
9.4.1 Extracting Marked Strings 160
9.4.2 Rearranging `printf` Arguments 160
9.4.3 `awk` Portability Issues 161
9.5 A Simple Internationalization Example 162
9.6 `gawk` Can Speak Your Language 163

10 Advanced Features of `gawk` 165

10.1 Allowing Nondecimal Input Data 165
10.2 Two-Way Communications with Another Process 166
10.3 Using `gawk` for Network Programming 168
10.4 Using `gawk` with BSD Portals 169
10.5 Profiling Your `awk` Programs 169

11 Running `awk` and `gawk` 173

11.1 Invoking `awk` 173
11.2 Command-Line Options 173
11.3 Other Command-Line Arguments 178
11.4 The `AWKPATH` Environment Variable 178
11.5 Obsolete Options and/or Features 179
11.6 Undocumented Options and Features 180
11.7 Known Bugs in `gawk` 180

12 A Library of `awk` Functions 181

12.1 Naming Library Function Global Variables 181
12.2 General Programming 183
12.2.1 Implementing `nextfile` as a Function 183
12.2.2 Converting Strings To Numbers 184
12.2.3 Assertions 185
12.2.4 Rounding Numbers 187
12.2.5 The Cliff Random Number Generator 188
12.2.6 Translating Between Characters and Numbers 188
12.2.7 Merging an Array into a String 190
12.2.8 Managing the Time of Day 190
12.3 Data File Management 192
12.3.1 Noting Data File Boundaries 192
12.3.2 Rereading the Current File 193
12.3.3 Checking for Readable Data Files 194
12.3.4 Checking For Zero-length Files 195
12.3.5 Treating Assignments as File Names 196
12.4 Processing Command-Line Options 196
12.5 Reading the User Database 201
12.6 Reading the Group Database 205

13 Practical `awk` Programs 210

13.1 Running the Example Programs 210
13.2 Reinventing Wheels for Fun and Profit 210
13.2.1 Cutting out Fields and Columns 210
13.2.2 Searching for Regular Expressions in Files 215
13.2.3 Printing out User Information 219
13.2.4 Splitting a Large File into Pieces 221
13.2.5 Duplicating Output into Multiple Files 223
13.2.6 Printing Nonduplicated Lines of Text 224
13.2.7 Counting Things 228

13.3 A Grab Bag of awk Programs 230
13.3.1 Finding Duplicated Words in a Document 230
13.3.2 An Alarm Clock Program 231
13.3.3 Transliterating Characters 233
13.3.4 Printing Mailing Labels 235
13.3.5 Generating Word-Usage Counts 237
13.3.6 Removing Duplicates from Unsorted Text 239
13.3.7 Extracting Programs from Texinfo Source Files 240
13.3.8 A Simple Stream Editor 243
13.3.9 An Easy Way to Use Library Functions 244

Appendix A The Evolution of the awk Language 252

A.1 Major Changes Between V7 and SVR3.1 252
A.2 Changes Between SVR3.1 and SVR4 253
A.3 Changes Between SVR4 and POSIX awk 253
A.4 Extensions in the Bell Laboratories awk 254
A.5 Extensions in gawk Not in POSIX awk 255
A.6 Major Contributors to gawk 258

Appendix B Installing gawk 260

B.1 The gawk Distribution 260
B.1.1 Getting the gawk Distribution 260
B.1.2 Extracting the Distribution 260
B.1.3 Contents of the gawk Distribution 261
B.2 Compiling and Installing gawk on Unix 264
B.2.1 Compiling gawk for Unix 264
B.2.2 Additional Configuration Options 264
B.2.3 The Configuration Process 265
B.3 Installation on Other Operating Systems 266
B.3.1 Installing gawk on an Amiga 266
B.3.2 Installing gawk on BeOS 266
B.3.3 Installation on PC Operating Systems 267
B.3.3.1 Installing a Prepared Distribution for PC Systems .. 267
B.3.3.2 Compiling gawk for PC Operating Systems 267
B.3.3.3 Compiling gawk For Dynamic Libraries 269
B.3.3.4 Using gawk on PC Operating Systems 270
B.3.3.5 Using gawk In The Cygwin Environment 271
B.3.4 How to Compile and Install gawk on VMS 271
B.3.4.1 Compiling gawk on VMS 271
B.3.4.2 Installing gawk on VMS 272
B.3.4.3 Running gawk on VMS 273
B.3.4.4 Building and Using gawk on VMS POSIX 273
B.4 Unsupported Operating System Ports 273
B.4.1 Installing gawk on the Atari ST 274
B.4.1.1 Compiling gawk on the Atari ST 274
B.4.1.2 Running gawk on the Atari ST 274

B.4.2 Installing `gawk` on a Tandem 275
B.5 Reporting Problems and Bugs 276
B.6 Other Freely Available `awk` Implementations 277

Appendix C Implementation Notes 279
C.1 Downward Compatibility and Debugging 279
C.2 Making Additions to `gawk` 279
C.2.1 Adding New Features 279
C.2.2 Porting `gawk` to a New Operating System 281
C.3 Adding New Built-in Functions to `gawk` 282
C.3.1 A Minimal Introduction to `gawk` Internals 282
C.3.2 Directory and File Operation Built-ins 286
C.3.2.1 Using `chdir` and `stat` 286
C.3.2.2 C Code for `chdir` and `stat` 287
C.3.2.3 Integrating the Extensions 290
C.4 Probable Future Extensions 291

Appendix D Basic Programming Concepts . . 294
D.1 What a Program Does 294
D.2 Data Values in a Computer 295
D.3 Floating-Point Number Caveats 296

Glossary 299

GNU General Public License 309
Preamble 309
Terms and Conditions for Copying, Distribution and Modification . . 310
How to Apply These Terms to Your New Programs 314

GNU Free Documentation License 315
ADDENDUM: How to use this License for your documents 320

Index 322

Foreword

Arnold Robbins and I are good friends. We were introduced 11 years ago by circumstances—and our favorite programming language, AWK. The circumstances started a couple of years earlier. I was working at a new job and noticed an unplugged Unix computer sitting in the corner. No one knew how to use it, and neither did I. However, a couple of days later it was running, and I was `root` and the one-and-only user. That day, I began the transition from statistician to Unix programmer.

On one of many trips to the library or bookstore in search of books on Unix, I found the gray AWK book, a.k.a. Aho, Kernighan and Weinberger, *The AWK Programming Language*, Addison-Wesley, 1988. AWK's simple programming paradigm—find a pattern in the input and then perform an action—often reduced complex or tedious data manipulations to few lines of code. I was excited to try my hand at programming in AWK.

Alas, the `awk` on my computer was a limited version of the language described in the AWK book. I discovered that my computer had "old `awk`" and the AWK book described "new `awk`." I learned that this was typical; the old version refused to step aside or relinquish its name. If a system had a new `awk`, it was invariably called `nawk`, and few systems had it. The best way to get a new `awk` was to `ftp` the source code for `gawk` from `prep.ai.mit.edu`. `gawk` was a version of new `awk` written by David Trueman and Arnold, and available under the GNU General Public License.

(Incidentally, it's no longer difficult to find a new `awk`. `gawk` ships with Linux, and you can download binaries or source code for almost any system; my wife uses `gawk` on her VMS box.)

My Unix system started out unplugged from the wall; it certainly was not plugged into a network. So, oblivious to the existence of `gawk` and the Unix community in general, and desiring a new `awk`, I wrote my own, called `mawk`. Before I was finished I knew about `gawk`, but it was too late to stop, so I eventually posted to a `comp.sources` newsgroup.

A few days after my posting, I got a friendly email from Arnold introducing himself. He suggested we share design and algorithms and attached a draft of the POSIX standard so that I could update `mawk` to support language extensions added after publication of the AWK book.

Frankly, if our roles had been reversed, I would not have been so open and we probably would have never met. I'm glad we did meet. He is an AWK expert's AWK expert and a genuinely nice person. Arnold contributes significant amounts of his expertise and time to the Free Software Foundation.

This book is the `gawk` reference manual, but at its core it is a book about AWK programming that will appeal to a wide audience. It is a definitive reference to the AWK language as defined by the 1987 Bell Labs release and codified in the 1992 POSIX Utilities standard.

On the other hand, the novice AWK programmer can study a wealth of practical programs that emphasize the power of AWK's basic idioms: data driven control-flow, pattern matching with regular expressions, and associative arrays. Those looking for something new can try out `gawk`'s interface to network protocols via special '`/inet`' files.

The programs in this book make clear that an AWK program is typically much smaller and faster to develop than a counterpart written in C. Consequently, there is often a payoff to prototype an algorithm or design in AWK to get it running quickly and expose problems

early. Often, the interpreted performance is adequate and the AWK prototype becomes the product.

The new `pgawk` (profiling `gawk`), produces program execution counts. I recently experimented with an algorithm that for n lines of input, exhibited $\sim Cn^2$ performance, while theory predicted $\sim Cn \log n$ behavior. A few minutes poring over the '`awkprof.out`' profile pinpointed the problem to a single line of code. `pgawk` is a welcome addition to my programmer's toolbox.

Arnold has distilled over a decade of experience writing and using AWK programs, and developing `gawk`, into this book. If you use AWK or want to learn how, then read this book.

Michael Brennan
Author of `mawk`

Preface

Several kinds of tasks occur repeatedly when working with text files. You might want to extract certain lines and discard the rest. Or you may need to make changes wherever certain patterns appear, but leave the rest of the file alone. Writing single-use programs for these tasks in languages such as C, C++, or Pascal is time-consuming and inconvenient. Such jobs are often easier with `awk`. The `awk` utility interprets a special-purpose programming language that makes it easy to handle simple data-reformatting jobs.

The GNU implementation of `awk` is called `gawk`; it is fully compatible with the System V Release 4 version of `awk`. `gawk` is also compatible with the POSIX specification of the `awk` language. This means that all properly written `awk` programs should work with `gawk`. Thus, we usually don't distinguish between `gawk` and other `awk` implementations.

Using `awk` allows you to:

- Manage small, personal databases
- Generate reports
- Validate data
- Produce indexes and perform other document preparation tasks
- Experiment with algorithms that you can adapt later to other computer languages

In addition, `gawk` provides facilities that make it easy to:

- Extract bits and pieces of data for processing
- Sort data
- Perform simple network communications

This book teaches you about the `awk` language and how you can use it effectively. You should already be familiar with basic system commands, such as `cat` and `ls`,[1] as well as basic shell facilities, such as input/output (I/O) redirection and pipes.

Implementations of the `awk` language are available for many different computing environments. This book, while describing the `awk` language in general, also describes the particular implementation of `awk` called `gawk` (which stands for "GNU awk"). `gawk` runs on a broad range of Unix systems, ranging from 80386 PC-based computers up through large-scale systems, such as Crays. `gawk` has also been ported to Mac OS X, MS-DOS, Microsoft Windows (all versions) and OS/2 PCs, Atari and Amiga microcomputers, BeOS, Tandem D20, and VMS.

History of `awk` and `gawk`

Recipe For A Programming Language

1 part `egrep`	1 part `snobol`
2 parts `ed`	3 parts C

Blend all parts well using `lex` and `yacc`. Document minimally and release.

[1] These commands are available on POSIX-compliant systems, as well as on traditional Unix-based systems. If you are using some other operating system, you still need to be familiar with the ideas of I/O redirection and pipes.

> After eight years, add another part `egrep` and two more parts C. Document very well and release.

The name `awk` comes from the initials of its designers: Alfred V. Aho, Peter J. Weinberger and Brian W. Kernighan. The original version of `awk` was written in 1977 at AT&T Bell Laboratories. In 1985, a new version made the programming language more powerful, introducing user-defined functions, multiple input streams, and computed regular expressions. This new version became widely available with Unix System V Release 3.1 (SVR3.1). The version in SVR4 added some new features and cleaned up the behavior in some of the "dark corners" of the language. The specification for `awk` in the POSIX Command Language and Utilities standard further clarified the language. Both the `gawk` designers and the original Bell Laboratories `awk` designers provided feedback for the POSIX specification.

Paul Rubin wrote the GNU implementation, `gawk`, in 1986. Jay Fenlason completed it, with advice from Richard Stallman. John Woods contributed parts of the code as well. In 1988 and 1989, David Trueman, with help from me, thoroughly reworked `gawk` for compatibility with the newer `awk`. Circa 1995, I became the primary maintainer. Current development focuses on bug fixes, performance improvements, standards compliance, and occasionally, new features.

In May of 1997, Jürgen Kahrs felt the need for network access from `awk`, and with a little help from me, set about adding features to do this for `gawk`. At that time, he also wrote the bulk of *TCP/IP Internetworking with* `gawk` (a separate document, available as part of the `gawk` distribution). His code finally became part of the main `gawk` distribution with `gawk` version 3.1.

See Section A.6 [Major Contributors to `gawk`], page 258, for a complete list of those who made important contributions to `gawk`.

A Rose by Any Other Name

The `awk` language has evolved over the years. Full details are provided in Appendix A [The Evolution of the `awk` Language], page 252. The language described in this book is often referred to as "new `awk`" (`nawk`).

Because of this, many systems have multiple versions of `awk`. Some systems have an `awk` utility that implements the original version of the `awk` language and a `nawk` utility for the new version. Others have an `oawk` version for the "old `awk`" language and plain `awk` for the new one. Still others only have one version, which is usually the new one.[2]

All in all, this makes it difficult for you to know which version of `awk` you should run when writing your programs. The best advice I can give here is to check your local documentation. Look for `awk`, `oawk`, and `nawk`, as well as for `gawk`. It is likely that you already have some version of new `awk` on your system, which is what you should use when running your programs. (Of course, if you're reading this book, chances are good that you have `gawk`!)

Throughout this book, whenever we refer to a language feature that should be available in any complete implementation of POSIX `awk`, we simply use the term `awk`. When referring to a feature that is specific to the GNU implementation, we use the term `gawk`.

[2] Often, these systems use `gawk` for their `awk` implementation!

Using This Book

The term `awk` refers to a particular program as well as to the language you use to tell this program what to do. When we need to be careful, we call the language "the `awk` language," and the program "the `awk` utility." This book explains both the `awk` language and how to run the `awk` utility. The term `awk` *program* refers to a program written by you in the `awk` programming language.

Primarily, this book explains the features of `awk`, as defined in the POSIX standard. It does so in the context of the `gawk` implementation. While doing so, it also attempts to describe important differences between `gawk` and other `awk` implementations.[3] Finally, any `gawk` features that are not in the POSIX standard for `awk` are noted.

This book has the difficult task of being both a tutorial and a reference. If you are a novice, feel free to skip over details that seem too complex. You should also ignore the many cross-references; they are for the expert user and for the online Info version of the document.

There are subsections labelled as **Advanced Notes** scattered throughout the book. They add a more complete explanation of points that are relevant, but not likely to be of interest on first reading. All appear in the index, under the heading "advanced features."

Most of the time, the examples use complete `awk` programs. In some of the more advanced sections, only the part of the `awk` program that illustrates the concept currently being described is shown.

While this book is aimed principally at people who have not been exposed to `awk`, there is a lot of information here that even the `awk` expert should find useful. In particular, the description of POSIX `awk` and the example programs in Chapter 12 [A Library of `awk` Functions], page 181, and in Chapter 13 [Practical `awk` Programs], page 210, should be of interest.

Chapter 1 [Getting Started with `awk`], page 11, provides the essentials you need to know to begin using `awk`.

Chapter 2 [Regular Expressions], page 24, introduces regular expressions in general, and in particular the flavors supported by POSIX `awk` and `gawk`.

Chapter 3 [Reading Input Files], page 36, describes how `awk` reads your data. It introduces the concepts of records and fields, as well as the `getline` command. I/O redirection is first described here.

Chapter 4 [Printing Output], page 57, describes how `awk` programs can produce output with `print` and `printf`.

Chapter 5 [Expressions], page 73, describes expressions, which are the basic building blocks for getting most things done in a program.

Chapter 6 [Patterns, Actions, and Variables], page 93, describes how to write patterns for matching records, actions for doing something when a record is matched, and the built-in variables `awk` and `gawk` use.

Chapter 7 [Arrays in `awk`], page 116, covers `awk`'s one-and-only data structure: associative arrays. Deleting array elements and whole arrays is also described, as well as sorting arrays in `gawk`.

[3] All such differences appear in the index under the entry "differences in `awk` and `gawk`."

Chapter 8 [Functions], page 127, describes the built-in functions `awk` and `gawk` provide, as well as how to define your own functions.

Chapter 9 [Internationalization with `gawk`], page 156, describes special features in `gawk` for translating program messages into different languages at runtime.

Chapter 10 [Advanced Features of `gawk`], page 165, describes a number of `gawk`-specific advanced features. Of particular note are the abilities to have two-way communications with another process, perform TCP/IP networking, and profile your `awk` programs.

Chapter 11 [Running `awk` and `gawk`], page 173, describes how to run `gawk`, the meaning of its command-line options, and how it finds `awk` program source files.

Chapter 12 [A Library of `awk` Functions], page 181, and Chapter 13 [Practical `awk` Programs], page 210, provide many sample `awk` programs. Reading them allows you to see `awk` solving real problems.

Appendix A [The Evolution of the `awk` Language], page 252, describes how the `awk` language has evolved since first release to present. It also describes how `gawk` has acquired features over time.

Appendix B [Installing `gawk`], page 260, describes how to get `gawk`, how to compile it under Unix, and how to compile and use it on different non-Unix systems. It also describes how to report bugs in `gawk` and where to get three other freely available implementations of `awk`.

Appendix C [Implementation Notes], page 279, describes how to disable `gawk`'s extensions, as well as how to contribute new code to `gawk`, how to write extension libraries, and some possible future directions for `gawk` development.

Appendix D [Basic Programming Concepts], page 294, provides some very cursory background material for those who are completely unfamiliar with computer programming. Also centralized there is a discussion of some of the issues surrounding floating-point numbers.

The [Glossary], page 299, defines most, if not all, the significant terms used throughout the book. If you find terms that you aren't familiar with, try looking them up here.

[GNU General Public License], page 309, and [GNU Free Documentation License], page 315, present the licenses that cover the `gawk` source code and this book, respectively.

Typographical Conventions

This book is written using Texinfo, the GNU documentation formatting language. A single Texinfo source file is used to produce both the printed and online versions of the documentation. Because of this, the typographical conventions are slightly different than in other books you may have read.

Examples you would type at the command-line are preceded by the common shell primary and secondary prompts, '`$`' and '`>`'. Output from the command is preceded by the glyph "⊣". This typically represents the command's standard output. Error messages, and other output on the command's standard error, are preceded by the glyph "error ". For example:

```
$ echo hi on stdout
⊣ hi on stdout
$ echo hello on stderr 1>&2
error  hello on stderr
```

In the text, command names appear in `this font`, while code segments appear in the same font and quoted, '`like this`'. Some things are emphasized *like this*, and if a point needs to be made strongly, it is done **like this**. The first occurrence of a new term is usually its *definition* and appears in the same font as the previous occurrence of "definition" in this sentence. file names are indicated like this: '`/path/to/ourfile`'.

Characters that you type at the keyboard look *`like this`*. In particular, there are special characters called "control characters." These are characters that you type by holding down both the *`CONTROL`* key and another key, at the same time. For example, a *`Ctrl-d`* is typed by first pressing and holding the *`CONTROL`* key, next pressing the *`d`* key and finally releasing both keys.

Dark Corners

> *Dark corners are basically fractal — no matter how much you illuminate, there's always a smaller but darker one.*
> Brian Kernighan

Until the POSIX standard (and *The Gawk Manual*), many features of `awk` were either poorly documented or not documented at all. Descriptions of such features (often called "dark corners") are noted in this book with the picture of a flashlight in the margin, as shown here. They also appear in the index under the heading "dark corner."

As noted by the opening quote, though, any coverage of dark corners is, by definition, something that is incomplete.

The GNU Project and This Book

The Free Software Foundation (FSF) is a nonprofit organization dedicated to the production and distribution of freely distributable software. It was founded by Richard M. Stallman, the author of the original Emacs editor. GNU Emacs is the most widely used version of Emacs today.

The GNU[4] Project is an ongoing effort on the part of the Free Software Foundation to create a complete, freely distributable, POSIX-compliant computing environment. The FSF uses the "GNU General Public License" (GPL) to ensure that their software's source code is always available to the end user. A copy of the GPL is included in this book for your reference (see [GNU General Public License], page 309). The GPL applies to the C language source code for `gawk`. To find out more about the FSF and the GNU Project online, see the GNU Project's home page (`http://www.gnu.org`). This book may also be read from their web site (`http://www.gnu.org/manual/gawk/`).

A shell, an editor (Emacs), highly portable optimizing C, C++, and Objective-C compilers, a symbolic debugger and dozens of large and small utilities (such as `gawk`), have all been completed and are freely available. The GNU operating system kernel (the HURD), has been released but is still in an early stage of development.

Until the GNU operating system is more fully developed, you should consider using GNU/Linux, a freely distributable, Unix-like operating system for Intel 80386, DEC Alpha, Sun SPARC, IBM S/390, and other systems.[5] There are many books on GNU/Linux. One

[4] GNU stands for "GNU's not Unix."

[5] The terminology "GNU/Linux" is explained in the [Glossary], page 299.

that is freely available is *Linux Installation and Getting Started*, by Matt Welsh. Many GNU/Linux distributions are often available in computer stores or bundled on CD-ROMs with books about Linux. (There are three other freely available, Unix-like operating systems for 80386 and other systems: NetBSD, FreeBSD, and OpenBSD. All are based on the 4.4-Lite Berkeley Software Distribution, and they use recent versions of `gawk` for their versions of `awk`.)

The book you are reading is actually free—at least, the information in it is free to anyone. The machine-readable source code for the book comes with `gawk`; anyone may take this book to a copying machine and make as many copies as they like. (Take a moment to check the Free Documentation License in [GNU Free Documentation License], page 315.)

Although you could just print it out yourself, bound books are much easier to read and use. Furthermore, the proceeds from sales of this book go back to the FSF to help fund development of more free software.

The book itself has gone through a number of previous editions. Paul Rubin wrote the very first draft of *The GAWK Manual*; it was around 40 pages in size. Diane Close and Richard Stallman improved it, yielding a version that was around 90 pages long and barely described the original, "old" version of `awk`.

I started working with that version in the fall of 1988. As work on it progressed, the FSF published several preliminary versions (numbered 0.*x*). In 1996, Edition 1.0 was released with `gawk` 3.0.0. The FSF published the first two editions under the title *The GNU Awk User's Guide*.

This edition maintains the basic structure of Edition 1.0, but with significant additional material, reflecting the host of new features in `gawk` version 3.1. Of particular note is Section 7.11 [Sorting Array Values and Indices with `gawk`], page 124, as well as Section 8.1.6 [Bit-Manipulation Functions of `gawk`], page 147, Chapter 9 [Internationalization with `gawk`], page 156, and also Chapter 10 [Advanced Features of `gawk`], page 165, and Section C.3 [Adding New Built-in Functions to `gawk`], page 282.

GAWK: Effective AWK Programming will undoubtedly continue to evolve. An electronic version comes with the `gawk` distribution from the FSF. If you find an error in this book, please report it! See Section B.5 [Reporting Problems and Bugs], page 276, for information on submitting problem reports electronically, or write to me in care of the publisher.

How to Contribute

As the maintainer of GNU `awk`, I am starting a collection of publicly available `awk` programs. For more information, see `ftp://ftp.freefriends.org/arnold/Awkstuff`. If you have written an interesting `awk` program, or have written a `gawk` extension that you would like to share with the rest of the world, please contact me (`arnold@skeeve.com`). Making things available on the Internet helps keep the `gawk` distribution down to manageable size.

Acknowledgments

The initial draft of *The GAWK Manual* had the following acknowledgments:

> Many people need to be thanked for their assistance in producing this manual. Jay Fenlason contributed many ideas and sample programs. Richard Mlynarik and Robert Chassell gave helpful comments on drafts of this manual. The

> paper *A Supplemental Document for* `awk` by John W. Pierce of the Chemistry Department at UC San Diego, pinpointed several issues relevant both to `awk` implementation and to this manual, that would otherwise have escaped us.

I would like to acknowledge Richard M. Stallman, for his vision of a better world and for his courage in founding the FSF and starting the GNU Project.

The following people (in alphabetical order) provided helpful comments on various versions of this book, up to and including this edition. Rick Adams, Nelson H.F. Beebe, Karl Berry, Dr. Michael Brennan, Rich Burridge, Claire Cloutier, Diane Close, Scott Deifik, Christopher ("Topher") Eliot, Jeffrey Friedl, Dr. Darrel Hankerson, Michal Jaegermann, Dr. Richard J. LeBlanc, Michael Lijewski, Pat Rankin, Miriam Robbins, Mary Sheehan, and Chuck Toporek.

Robert J. Chassell provided much valuable advice on the use of Texinfo. He also deserves special thanks for convincing me *not* to title this book *How To Gawk Politely*. Karl Berry helped significantly with the TEX part of Texinfo.

I would like to thank Marshall and Elaine Hartholz of Seattle and Dr. Bert and Rita Schreiber of Detroit for large amounts of quiet vacation time in their homes, which allowed me to make significant progress on this book and on `gawk` itself.

Phil Hughes of SSC contributed in a very important way by loaning me his laptop GNU/Linux system, not once, but twice, which allowed me to do a lot of work while away from home.

David Trueman deserves special credit; he has done a yeoman job of evolving `gawk` so that it performs well and without bugs. Although he is no longer involved with `gawk`, working with him on this project was a significant pleasure.

The intrepid members of the GNITS mailing list, and most notably Ulrich Drepper, provided invaluable help and feedback for the design of the internationalization features.

Nelson Beebe, Martin Brown, Andreas Buening, Scott Deifik, Darrel Hankerson, Isamu Hasegawa, Michal Jaegermann, Jürgen Kahrs, Pat Rankin, Kai Uwe Rommel, and Eli Zaretskii (in alphabetical order) make up the `gawk` "crack portability team." Without their hard work and help, `gawk` would not be nearly the fine program it is today. It has been and continues to be a pleasure working with this team of fine people.

David and I would like to thank Brian Kernighan of Bell Laboratories for invaluable assistance during the testing and debugging of `gawk`, and for help in clarifying numerous points about the language. We could not have done nearly as good a job on either `gawk` or its documentation without his help.

Chuck Toporek, Mary Sheehan, and Claire Coutier of O'Reilly & Associates contributed significant editorial help for this book for the 3.1 release of `gawk`.

I must thank my wonderful wife, Miriam, for her patience through the many versions of this project, for her proofreading, and for sharing me with the computer. I would like to thank my parents for their love, and for the grace with which they raised and educated me. Finally, I also must acknowledge my gratitude to G-d, for the many opportunities He has sent my way, as well as for the gifts He has given me with which to take advantage of those opportunities.

Arnold Robbins
Nof Ayalon
ISRAEL
March, 2001

1 Getting Started with awk

The basic function of awk is to search files for lines (or other units of text) that contain certain patterns. When a line matches one of the patterns, awk performs specified actions on that line. awk keeps processing input lines in this way until it reaches the end of the input files.

Programs in awk are different from programs in most other languages, because awk programs are *data-driven*; that is, you describe the data you want to work with and then what to do when you find it. Most other languages are *procedural*; you have to describe, in great detail, every step the program is to take. When working with procedural languages, it is usually much harder to clearly describe the data your program will process. For this reason, awk programs are often refreshingly easy to read and write.

When you run awk, you specify an awk *program* that tells awk what to do. The program consists of a series of *rules*. (It may also contain *function definitions*, an advanced feature that we will ignore for now. See Section 8.2 [User-Defined Functions], page 149.) Each rule specifies one pattern to search for and one action to perform upon finding the pattern.

Syntactically, a rule consists of a pattern followed by an action. The action is enclosed in curly braces to separate it from the pattern. Newlines usually separate rules. Therefore, an awk program looks like this:

```
pattern { action }
pattern { action }
...
```

1.1 How to Run awk Programs

There are several ways to run an awk program. If the program is short, it is easiest to include it in the command that runs awk, like this:

```
awk 'program' input-file1 input-file2 ...
```

When the program is long, it is usually more convenient to put it in a file and run it with a command like this:

```
awk -f program-file input-file1 input-file2 ...
```

This section discusses both mechanisms, along with several variations of each.

1.1.1 One-Shot Throwaway awk Programs

Once you are familiar with awk, you will often type in simple programs the moment you want to use them. Then you can write the program as the first argument of the awk command, like this:

```
awk 'program' input-file1 input-file2 ...
```

where *program* consists of a series of *patterns* and *actions*, as described earlier.

This command format instructs the *shell*, or command interpreter, to start awk and use the *program* to process records in the input file(s). There are single quotes around *program* so the shell won't interpret any awk characters as special shell characters. The quotes also cause the shell to treat all of *program* as a single argument for awk, and allow *program* to be more than one line long.

This format is also useful for running short or medium-sized `awk` programs from shell scripts, because it avoids the need for a separate file for the `awk` program. A self-contained shell script is more reliable because there are no other files to misplace.

Section 1.3 [Some Simple Examples], page 17, later in this chapter, presents several short, self-contained programs.

1.1.2 Running `awk` Without Input Files

You can also run `awk` without any input files. If you type the following command line:

```
awk 'program'
```

`awk` applies the *program* to the *standard input*, which usually means whatever you type on the terminal. This continues until you indicate end-of-file by typing *Ctrl-d*. (On other operating systems, the end-of-file character may be different. For example, on OS/2 and MS-DOS, it is *Ctrl-z*.)

As an example, the following program prints a friendly piece of advice (from Douglas Adams's *The Hitchhiker's Guide to the Galaxy*), to keep you from worrying about the complexities of computer programming (`BEGIN` is a feature we haven't discussed yet):

```
$ awk "BEGIN { print \"Don't Panic!\" }"
⊣ Don't Panic!
```

This program does not read any input. The '\' before each of the inner double quotes is necessary because of the shell's quoting rules—in particular because it mixes both single quotes and double quotes.[1]

This next simple `awk` program emulates the `cat` utility; it copies whatever you type on the keyboard to its standard output (why this works is explained shortly).

```
$ awk '{ print }'
Now is the time for all good men
⊣ Now is the time for all good men
to come to the aid of their country.
⊣ to come to the aid of their country.
Four score and seven years ago, ...
⊣ Four score and seven years ago, ...
What, me worry?
⊣ What, me worry?
Ctrl-d
```

1.1.3 Running Long Programs

Sometimes your `awk` programs can be very long. In this case, it is more convenient to put the program into a separate file. In order to tell `awk` to use that file for its program, you type:

```
awk -f source-file input-file1 input-file2 ...
```

The '`-f`' instructs the `awk` utility to get the `awk` program from the file *source-file*. Any file name can be used for *source-file*. For example, you could put the program:

[1] Although we generally recommend the use of single quotes around the program text, double quotes are needed here in order to put the single quote into the message.

```
BEGIN { print "Don't Panic!" }
```

into the file 'advice'. Then this command:

```
awk -f advice
```

does the same thing as this one:

```
awk "BEGIN { print \"Don't Panic!\" }"
```

This was explained earlier (see Section 1.1.2 [Running awk Without Input Files], page 12). Note that you don't usually need single quotes around the file name that you specify with '-f', because most file names don't contain any of the shell's special characters. Notice that in 'advice', the awk program did not have single quotes around it. The quotes are only needed for programs that are provided on the awk command line.

If you want to identify your awk program files clearly as such, you can add the extension '.awk' to the file name. This doesn't affect the execution of the awk program but it does make "housekeeping" easier.

1.1.4 Executable awk Programs

Once you have learned awk, you may want to write self-contained awk scripts, using the '#!' script mechanism. You can do this on many Unix systems[2] as well as on the GNU system. For example, you could update the file 'advice' to look like this:

```
#! /bin/awk -f

BEGIN { print "Don't Panic!" }
```

After making this file executable (with the chmod utility), simply type 'advice' at the shell and the system arranges to run awk[3] as if you had typed 'awk -f advice':

```
$ chmod +x advice
$ advice
⊣ Don't Panic!
```

(We assume you have the current directory in your shell's search path variable (typically $PATH). If not, you may need to type './advice' at the shell.)

Self-contained awk scripts are useful when you want to write a program that users can invoke without their having to know that the program is written in awk.

Advanced Notes: Portability Issues with '#!'

Some systems limit the length of the interpreter name to 32 characters. Often, this can be dealt with by using a symbolic link.

You should not put more than one argument on the '#!' line after the path to awk. It does not work. The operating system treats the rest of the line as a single argument and

[2] The '#!' mechanism works on Linux systems, systems derived from the 4.4-Lite Berkeley Software Distribution, and most commercial Unix systems.

[3] The line beginning with '#!' lists the full file name of an interpreter to run and an optional initial command-line argument to pass to that interpreter. The operating system then runs the interpreter with the given argument and the full argument list of the executed program. The first argument in the list is the full file name of the awk program. The rest of the argument list contains either options to awk, or data files, or both.

passes it to `awk`. Doing this leads to confusing behavior—most likely a usage diagnostic of some sort from `awk`.

Finally, the value of `ARGV[0]` (see Section 6.5 [Built-in Variables], page 107) varies depending upon your operating system. Some systems put '`awk`' there, some put the full pathname of `awk` (such as '`/bin/awk`'), and some put the name of your script ('`advice`'). Don't rely on the value of `ARGV[0]` to provide your script name.

1.1.5 Comments in `awk` Programs

A *comment* is some text that is included in a program for the sake of human readers; it is not really an executable part of the program. Comments can explain what the program does and how it works. Nearly all programming languages have provisions for comments, as programs are typically hard to understand without them.

In the `awk` language, a comment starts with the sharp sign character ('`#`') and continues to the end of the line. The '`#`' does not have to be the first character on the line. The `awk` language ignores the rest of a line following a sharp sign. For example, we could have put the following into '`advice`':

```
# This program prints a nice friendly message.  It helps
# keep novice users from being afraid of the computer.
BEGIN    { print "Don't Panic!" }
```

You can put comment lines into keyboard-composed throwaway `awk` programs, but this usually isn't very useful; the purpose of a comment is to help you or another person understand the program when reading it at a later time.

Caution: As mentioned in Section 1.1.1 [One-Shot Throwaway `awk` Programs], page 11, you can enclose small to medium programs in single quotes, in order to keep your shell scripts self-contained. When doing so, *don't* put an apostrophe (i.e., a single quote) into a comment (or anywhere else in your program). The shell interprets the quote as the closing quote for the entire program. As a result, usually the shell prints a message about mismatched quotes, and if `awk` actually runs, it will probably print strange messages about syntax errors. For example, look at the following:

```
$ awk '{ print "hello" } # let's be cute'
>
```

The shell sees that the first two quotes match, and that a new quoted object begins at the end of the command line. It therefore prompts with the secondary prompt, waiting for more input. With Unix `awk`, closing the quoted string produces this result:

```
$ awk '{ print "hello" } # let's be cute'
> '
error  awk: can't open file be
error   source line number 1
```

Putting a backslash before the single quote in '`let's`' wouldn't help, since backslashes are not special inside single quotes. The next subsection describes the shell's quoting rules.

1.1.6 Shell-Quoting Issues

For short to medium length `awk` programs, it is most convenient to enter the program on the `awk` command line. This is best done by enclosing the entire program in single quotes. This

is true whether you are entering the program interactively at the shell prompt, or writing it as part of a larger shell script:

```
awk 'program text' input-file1 input-file2 ...
```

Once you are working with the shell, it is helpful to have a basic knowledge of shell quoting rules. The following rules apply only to POSIX-compliant, Bourne-style shells (such as bash, the GNU Bourne-Again Shell). If you use csh, you're on your own.

- Quoted items can be concatenated with nonquoted items as well as with other quoted items. The shell turns everything into one argument for the command.
- Preceding any single character with a backslash ('\') quotes that character. The shell removes the backslash and passes the quoted character on to the command.
- Single quotes protect everything between the opening and closing quotes. The shell does no interpretation of the quoted text, passing it on verbatim to the command. It is *impossible* to embed a single quote inside single-quoted text. Refer back to Section 1.1.5 [Comments in awk Programs], page 14, for an example of what happens if you try.
- Double quotes protect most things between the opening and closing quotes. The shell does at least variable and command substitution on the quoted text. Different shells may do additional kinds of processing on double-quoted text.

  Since certain characters within double-quoted text are processed by the shell, they must be *escaped* within the text. Of note are the characters '$', '`', '\', and '"', all of which must be preceded by a backslash within double-quoted text if they are to be passed on literally to the program. (The leading backslash is stripped first.) Thus, the example seen previously in Section 1.1.2 [Running awk Without Input Files], page 12, is applicable:

  ```
  $ awk "BEGIN { print \"Don't Panic!\" }"
  ⊣ Don't Panic!
  ```

  Note that the single quote is not special within double quotes.
- Null strings are removed when they occur as part of a non-null command-line argument, while explicit non-null objects are kept. For example, to specify that the field separator FS should be set to the null string, use:

  ```
  awk -F "" 'program' files # correct
  ```

  Don't use this:

  ```
  awk -F"" 'program' files  # wrong!
  ```

  In the second case, awk will attempt to use the text of the program as the value of FS, and the first file name as the text of the program! This results in syntax errors at best, and confusing behavior at worst.

Mixing single and double quotes is difficult. You have to resort to shell quoting tricks, like this:

```
$ awk 'BEGIN { print "Here is a single quote <'"'"'>" }'
⊣ Here is a single quote <'>
```

This program consists of three concatenated quoted strings. The first and the third are single-quoted, the second is double-quoted.

This can be "simplified" to:

```
$ awk 'BEGIN { print "Here is a single quote <'\''>" }'
⊣ Here is a single quote <'>
```

Judge for yourself which of these two is the more readable.

Another option is to use double quotes, escaping the embedded, `awk`-level double quotes:

```
$ awk "BEGIN { print \"Here is a single quote <'>\" }"
⊣ Here is a single quote <'>
```

This option is also painful, because double quotes, backslashes, and dollar signs are very common in `awk` programs.

A third option is to use the octal escape sequence equivalents for the single- and double-quote characters, like so:

```
$ awk 'BEGIN { print "Here is a single quote <\47>" }'
⊣ Here is a single quote <'>
$ awk 'BEGIN { print "Here is a double quote <\42>" }'
⊣ Here is a double quote <">
```

This works nicely, except that you should comment clearly what the escapes mean.

A fourth option is to use command-line variable assignment, like this:

```
$ awk -v sq="'" 'BEGIN { print "Here is a single quote <" sq ">" }'
⊣ Here is a single quote <'>
```

If you really need both single and double quotes in your `awk` program, it is probably best to move it into a separate file, where the shell won't be part of the picture, and you can say what you mean.

1.2 Data Files for the Examples

Many of the examples in this book take their input from two sample data files. The first, '`BBS-list`', represents a list of computer bulletin board systems together with information about those systems. The second data file, called '`inventory-shipped`', contains information about monthly shipments. In both files, each line is considered to be one *record*.

In the data file '`BBS-list`', each record contains the name of a computer bulletin board, its phone number, the board's baud rate(s), and a code for the number of hours it is operational. An '`A`' in the last column means the board operates 24 hours a day. A '`B`' in the last column means the board only operates on evening and weekend hours. A '`C`' means the board operates only on weekends:

```
aardvark     555-5553     1200/300          B
alpo-net     555-3412     2400/1200/300     A
barfly       555-7685     1200/300          A
bites        555-1675     2400/1200/300     A
camelot      555-0542     300               C
core         555-2912     1200/300          C
fooey        555-1234     2400/1200/300     B
foot         555-6699     1200/300          B
macfoo       555-6480     1200/300          A
sdace        555-3430     2400/1200/300     A
sabafoo      555-2127     1200/300          C
```

The data file 'inventory-shipped' represents information about shipments during the year. Each record contains the month, the number of green crates shipped, the number of red boxes shipped, the number of orange bags shipped, and the number of blue packages shipped, respectively. There are 16 entries, covering the 12 months of last year and the first four months of the current year.

```
Jan  13  25  15 115
Feb  15  32  24 226
Mar  15  24  34 228
Apr  31  52  63 420
May  16  34  29 208
Jun  31  42  75 492
Jul  24  34  67 436
Aug  15  34  47 316
Sep  13  55  37 277
Oct  29  54  68 525
Nov  20  87  82 577
Dec  17  35  61 401

Jan  21  36  64 620
Feb  26  58  80 652
Mar  24  75  70 495
Apr  21  70  74 514
```

1.3 Some Simple Examples

The following command runs a simple awk program that searches the input file 'BBS-list' for the character string 'foo' (a grouping of characters is usually called a *string*; the term *string* is based on similar usage in English, such as "a string of pearls," or "a string of cars in a train"):

```
awk '/foo/ { print $0 }' BBS-list
```

When lines containing 'foo' are found, they are printed because 'print $0' means print the current line. (Just 'print' by itself means the same thing, so we could have written that instead.)

You will notice that slashes ('/') surround the string 'foo' in the awk program. The slashes indicate that 'foo' is the pattern to search for. This type of pattern is called a *regular expression*, which is covered in more detail later (see Chapter 2 [Regular Expressions], page 24). The pattern is allowed to match parts of words. There are single quotes around the awk program so that the shell won't interpret any of it as special shell characters.

Here is what this program prints:

```
$ awk '/foo/ { print $0 }' BBS-list
⊣ fooey        555-1234     2400/1200/300     B
⊣ foot         555-6699     1200/300          B
⊣ macfoo       555-6480     1200/300          A
⊣ sabafoo      555-2127     1200/300          C
```

In an `awk` rule, either the pattern or the action can be omitted, but not both. If the pattern is omitted, then the action is performed for *every* input line. If the action is omitted, the default action is to print all lines that match the pattern.

Thus, we could leave out the action (the `print` statement and the curly braces) in the previous example and the result would be the same: all lines matching the pattern '`foo`' are printed. By comparison, omitting the `print` statement but retaining the curly braces makes an empty action that does nothing (i.e., no lines are printed).

Many practical `awk` programs are just a line or two. Following is a collection of useful, short programs to get you started. Some of these programs contain constructs that haven't been covered yet. (The description of the program will give you a good idea of what is going on, but please read the rest of the book to become an `awk` expert!) Most of the examples use a data file named '`data`'. This is just a placeholder; if you use these programs yourself, substitute your own file names for '`data`'. For future reference, note that there is often more than one way to do things in `awk`. At some point, you may want to look back at these examples and see if you can come up with different ways to do the same things shown here:

- Print the length of the longest input line:

```
awk '{ if (length($0) > max) max = length($0) }
     END { print max }' data
```

- Print every line that is longer than 80 characters:

```
awk 'length($0) > 80' data
```

  The sole rule has a relational expression as its pattern and it has no action—so the default action, printing the record, is used.

- Print the length of the longest line in '`data`':

```
expand data | awk '{ if (x < length()) x = length() }
              END { print "maximum line length is " x }'
```

  The input is processed by the `expand` utility to change tabs into spaces, so the widths compared are actually the right-margin columns.

- Print every line that has at least one field:

```
awk 'NF > 0' data
```

  This is an easy way to delete blank lines from a file (or rather, to create a new file similar to the old file but from which the blank lines have been removed).

- Print seven random numbers from 0 to 100, inclusive:

```
awk 'BEGIN { for (i = 1; i <= 7; i++)
                 print int(101 * rand()) }'
```

- Print the total number of bytes used by *files*:

```
ls -l files | awk '{ x += $5 }
                   END { print "total bytes: " x }'
```

- Print the total number of kilobytes used by *files*:

```
ls -l files | awk '{ x += $5 }
   END { print "total K-bytes: " (x + 1023)/1024 }'
```

- Print a sorted list of the login names of all users:

```
awk -F: '{ print $1 }' /etc/passwd | sort
```

- Count the lines in a file:

```
awk 'END { print NR }' data
```

- Print the even-numbered lines in the data file:

```
awk 'NR % 2 == 0' data
```

  If you use the expression '`NR % 2 == 1`' instead, the program would print the odd-numbered lines.

1.4 An Example with Two Rules

The `awk` utility reads the input files one line at a time. For each line, `awk` tries the patterns of each of the rules. If several patterns match, then several actions are run in the order in which they appear in the `awk` program. If no patterns match, then no actions are run.

After processing all the rules that match the line (and perhaps there are none), `awk` reads the next line. (However, see Section 6.4.8 [The `next` Statement], page 105, and also see Section 6.4.9 [Using `gawk`'s `nextfile` Statement], page 106). This continues until the program reaches the end of the file. For example, the following `awk` program contains two rules:

```
/12/  { print $0 }
/21/  { print $0 }
```

The first rule has the string '`12`' as the pattern and '`print $0`' as the action. The second rule has the string '`21`' as the pattern and also has '`print $0`' as the action. Each rule's action is enclosed in its own pair of braces.

This program prints every line that contains the string '`12`' *or* the string '`21`'. If a line contains both strings, it is printed twice, once by each rule.

This is what happens if we run this program on our two sample data files, '`BBS-list`' and '`inventory-shipped`':

```
$ awk '/12/ { print $0 }
>      /21/ { print $0 }' BBS-list inventory-shipped
⊣ aardvark     555-5553     1200/300          B
⊣ alpo-net     555-3412     2400/1200/300     A
⊣ barfly       555-7685     1200/300          A
⊣ bites        555-1675     2400/1200/300     A
⊣ core         555-2912     1200/300          C
⊣ fooey        555-1234     2400/1200/300     B
⊣ foot         555-6699     1200/300          B
⊣ macfoo       555-6480     1200/300          A
⊣ sdace        555-3430     2400/1200/300     A
⊣ sabafoo      555-2127     1200/300          C
⊣ sabafoo      555-2127     1200/300          C
⊣ Jan  21  36  64 620
⊣ Apr  21  70  74 514
```

Note how the line beginning with '`sabafoo`' in '`BBS-list`' was printed twice, once for each rule.

1.5 A More Complex Example

Now that we've mastered some simple tasks, let's look at what typical `awk` programs do. This example shows how `awk` can be used to summarize, select, and rearrange the output of another utility. It uses features that haven't been covered yet, so don't worry if you don't understand all the details:

```
ls -l | awk '$6 == "Nov" { sum += $5 }
             END { print sum }'
```

This command prints the total number of bytes in all the files in the current directory that were last modified in November (of any year).[4] The '`ls -l`' part of this example is a system command that gives you a listing of the files in a directory, including each file's size and the date the file was last modified. Its output looks like this:

```
-rw-r--r--  1 arnold   user   1933 Nov  7 13:05 Makefile
-rw-r--r--  1 arnold   user  10809 Nov  7 13:03 awk.h
-rw-r--r--  1 arnold   user    983 Apr 13 12:14 awk.tab.h
-rw-r--r--  1 arnold   user  31869 Jun 15 12:20 awk.y
-rw-r--r--  1 arnold   user  22414 Nov  7 13:03 awk1.c
-rw-r--r--  1 arnold   user  37455 Nov  7 13:03 awk2.c
-rw-r--r--  1 arnold   user  27511 Dec  9 13:07 awk3.c
-rw-r--r--  1 arnold   user   7989 Nov  7 13:03 awk4.c
```

The first field contains read-write permissions, the second field contains the number of links to the file, and the third field identifies the owner of the file. The fourth field identifies the group of the file. The fifth field contains the size of the file in bytes. The sixth, seventh, and eighth fields contain the month, day, and time, respectively, that the file was last modified. Finally, the ninth field contains the name of the file.[5]

The '`$6 == "Nov"`' in our `awk` program is an expression that tests whether the sixth field of the output from '`ls -l`' matches the string '`Nov`'. Each time a line has the string '`Nov`' for its sixth field, the action '`sum += $5`' is performed. This adds the fifth field (the file's size) to the variable `sum`. As a result, when `awk` has finished reading all the input lines, `sum` is the total of the sizes of the files whose lines matched the pattern. (This works because `awk` variables are automatically initialized to zero.)

After the last line of output from `ls` has been processed, the `END` rule executes and prints the value of `sum`. In this example, the value of `sum` is 80600.

These more advanced `awk` techniques are covered in later sections (see Section 6.3 [Actions], page 98). Before you can move on to more advanced `awk` programming, you have to know how `awk` interprets your input and displays your output. By manipulating fields and using `print` statements, you can produce some very useful and impressive-looking reports.

1.6 `awk` Statements Versus Lines

Most often, each line in an `awk` program is a separate statement or separate rule, like this:

[4] In the C shell (`csh`), you need to type a semicolon and then a backslash at the end of the first line; see Section 1.6 [`awk` Statements Versus Lines], page 20, for an explanation. In a POSIX-compliant shell, such as the Bourne shell or `bash`, you can type the example as shown. If the command '`echo $path`' produces an empty output line, you are most likely using a POSIX-compliant shell. Otherwise, you are probably using the C shell or a shell derived from it.

[5] On some very old systems, you may need to use '`ls -lg`' to get this output.

```
awk '/12/  { print $0 }
     /21/  { print $0 }' BBS-list inventory-shipped
```

However, gawk ignores newlines after any of the following symbols and keywords:

```
,    {    ?    :    ||    &&    do    else
```

A newline at any other point is considered the end of the statement.[6]

If you would like to split a single statement into two lines at a point where a newline would terminate it, you can *continue* it by ending the first line with a backslash character ('\'). The backslash must be the final character on the line in order to be recognized as a continuation character. A backslash is allowed anywhere in the statement, even in the middle of a string or regular expression. For example:

```
awk '/This regular expression is too long, so continue it\
 on the next line/ { print $1 }'
```

We have generally not used backslash continuation in the sample programs in this book. In gawk, there is no limit on the length of a line, so backslash continuation is never strictly necessary; it just makes programs more readable. For this same reason, as well as for clarity, we have kept most statements short in the sample programs presented throughout the book. Backslash continuation is most useful when your awk program is in a separate source file instead of entered from the command line. You should also note that many awk implementations are more particular about where you may use backslash continuation. For example, they may not allow you to split a string constant using backslash continuation. Thus, for maximum portability of your awk programs, it is best not to split your lines in the middle of a regular expression or a string.

Caution: *Backslash continuation does not work as described with the C shell.* It works for awk programs in files and for one-shot programs, *provided* you are using a POSIX-compliant shell, such as the Unix Bourne shell or bash. But the C shell behaves differently! There, you must use two backslashes in a row, followed by a newline. Note also that when using the C shell, *every* newline in your awk program must be escaped with a backslash. To illustrate:

```
% awk 'BEGIN { \
?   print \\
?       "hello, world" \
? }'
⊣ hello, world
```

Here, the '%' and '?' are the C shell's primary and secondary prompts, analogous to the standard shell's '$' and '>'.

Compare the previous example to how it is done with a POSIX-compliant shell:

```
$ awk 'BEGIN {
>   print \
>       "hello, world"
> }'
⊣ hello, world
```

[6] The '?' and ':' referred to here is the three-operand conditional expression described in Section 5.12 [Conditional Expressions], page 89. Splitting lines after '?' and ':' is a minor gawk extension; if '--posix' is specified (see Section 11.2 [Command-Line Options], page 173), then this extension is disabled.

`awk` is a line-oriented language. Each rule's action has to begin on the same line as the pattern. To have the pattern and action on separate lines, you *must* use backslash continuation; there is no other option.

Another thing to keep in mind is that backslash continuation and comments do not mix. As soon as `awk` sees the '`#`' that starts a comment, it ignores *everything* on the rest of the line. For example:

```
$ gawk 'BEGIN { print "dont panic" # a friendly \
>                                  BEGIN rule
> }'
error  gawk: cmd. line:2:              BEGIN rule
error  gawk: cmd. line:2:              ^ parse error
```

In this case, it looks like the backslash would continue the comment onto the next line. However, the backslash-newline combination is never even noticed because it is "hidden" inside the comment. Thus, the `BEGIN` is noted as a syntax error.

When `awk` statements within one rule are short, you might want to put more than one of them on a line. This is accomplished by separating the statements with a semicolon ('`;`'). This also applies to the rules themselves. Thus, the program shown at the start of this section could also be written this way:

```
/12/ { print $0 } ; /21/ { print $0 }
```

NOTE: The requirement that states that rules on the same line must be separated with a semicolon was not in the original `awk` language; it was added for consistency with the treatment of statements within an action.

1.7 Other Features of `awk`

The `awk` language provides a number of predefined, or *built-in*, variables that your programs can use to get information from `awk`. There are other variables your program can set as well to control how `awk` processes your data.

In addition, `awk` provides a number of built-in functions for doing common computational and string-related operations. `gawk` provides built-in functions for working with timestamps, performing bit manipulation, and for runtime string translation.

As we develop our presentation of the `awk` language, we introduce most of the variables and many of the functions. They are defined systematically in Section 6.5 [Built-in Variables], page 107, and Section 8.1 [Built-in Functions], page 127.

1.8 When to Use `awk`

Now that you've seen some of what `awk` can do, you might wonder how `awk` could be useful for you. By using utility programs, advanced patterns, field separators, arithmetic statements, and other selection criteria, you can produce much more complex output. The `awk` language is very useful for producing reports from large amounts of raw data, such as summarizing information from the output of other utility programs like `ls`. (See Section 1.5 [A More Complex Example], page 20.)

Programs written with `awk` are usually much smaller than they would be in other languages. This makes `awk` programs easy to compose and use. Often, `awk` programs can

be quickly composed at your terminal, used once, and thrown away. Because `awk` programs are interpreted, you can avoid the (usually lengthy) compilation part of the typical edit-compile-test-debug cycle of software development.

Complex programs have been written in `awk`, including a complete retargetable assembler for eight-bit microprocessors (see [Glossary], page 299, for more information), and a microcode assembler for a special-purpose Prolog computer. More recently, `gawk` was used for writing a Wiki clone.[7] While the original `awk`'s capabilities were strained by tasks of such complexity, modern versions are more capable. Even the Bell Labs version of `awk` has fewer predefined limits, and those that it has are much larger than they used to be.

If you find yourself writing `awk` scripts of more than, say, a few hundred lines, you might consider using a different programming language. Emacs Lisp is a good choice if you need sophisticated string or pattern matching capabilities. The shell is also good at string and pattern matching; in addition, it allows powerful use of the system utilities. More conventional languages, such as C, C++, and Java, offer better facilities for system programming and for managing the complexity of large programs. Programs in these languages may require more lines of source code than the equivalent `awk` programs, but they are easier to maintain and usually run more efficiently.

[7] Yet Another Wiki Clone (`http://www.awk-scripting.de/cgi/wiki.cgi/yawk/`).

2 Regular Expressions

A *regular expression*, or *regexp*, is a way of describing a set of strings. Because regular expressions are such a fundamental part of `awk` programming, their format and use deserve a separate chapter.

A regular expression enclosed in slashes (‘`/`’) is an `awk` pattern that matches every input record whose text belongs to that set. The simplest regular expression is a sequence of letters, numbers, or both. Such a regexp matches any string that contains that sequence. Thus, the regexp ‘`foo`’ matches any string containing ‘`foo`’. Therefore, the pattern `/foo/` matches any input record containing the three characters ‘`foo`’ *anywhere* in the record. Other kinds of regexps let you specify more complicated classes of strings.

Initially, the examples in this chapter are simple. As we explain more about how regular expressions work, we will present more complicated instances.

2.1 How to Use Regular Expressions

A regular expression can be used as a pattern by enclosing it in slashes. Then the regular expression is tested against the entire text of each record. (Normally, it only needs to match some part of the text in order to succeed.) For example, the following prints the second field of each record that contains the string ‘`foo`’ anywhere in it:

```
$ awk '/foo/ { print $2 }' BBS-list
⊣ 555-1234
⊣ 555-6699
⊣ 555-6480
⊣ 555-2127
```

`~` (tilde), `~` operator Regular expressions can also be used in matching expressions. These expressions allow you to specify the string to match against; it need not be the entire current input record. The two operators ‘`~`’ and ‘`!~`’ perform regular expression comparisons. Expressions using these operators can be used as patterns, or in `if`, `while`, `for`, and `do` statements. (See Section 6.4 [Control Statements in Actions], page 99.) For example:

```
exp ~ /regexp/
```

is true if the expression *exp* (taken as a string) matches *regexp*. The following example matches, or selects, all input records with the uppercase letter ‘`J`’ somewhere in the first field:

```
$ awk '$1 ~ /J/' inventory-shipped
⊣ Jan  13  25  15 115
⊣ Jun  31  42  75 492
⊣ Jul  24  34  67 436
⊣ Jan  21  36  64 620
```

So does this:

```
awk '{ if ($1 ~ /J/) print }' inventory-shipped
```

This next example is true if the expression *exp* (taken as a character string) does *not* match *regexp*:

exp `!~ /`*regexp*`/`

The following example matches, or selects, all input records whose first field *does not* contain the uppercase letter ‘J’:

```
$ awk '$1 !~ /J/' inventory-shipped
⊣ Feb  15  32  24 226
⊣ Mar  15  24  34 228
⊣ Apr  31  52  63 420
⊣ May  16  34  29 208
...
```

When a regexp is enclosed in slashes, such as `/foo/`, we call it a *regexp constant*, much like `5.27` is a numeric constant and `"foo"` is a string constant.

2.2 Escape Sequences

Some characters cannot be included literally in string constants (`"foo"`) or regexp constants (`/foo/`). Instead, they should be represented with *escape sequences*, which are character sequences beginning with a backslash (‘\’). One use of an escape sequence is to include a double-quote character in a string constant. Because a plain double quote ends the string, you must use ‘`\"`’ to represent an actual double-quote character as a part of the string. For example:

```
$ awk 'BEGIN { print "He said \"hi!\" to her." }'
⊣ He said "hi!" to her.
```

The backslash character itself is another character that cannot be included normally; you must write ‘`\\`’ to put one backslash in the string or regexp. Thus, the string whose contents are the two characters ‘`"`’ and ‘\’ must be written `"\"\\"`.

Backslash also represents unprintable characters such as TAB or newline. While there is nothing to stop you from entering most unprintable characters directly in a string constant or regexp constant, they may look ugly.

The following table lists all the escape sequences used in `awk` and what they represent. Unless noted otherwise, all these escape sequences apply to both string constants and regexp constants:

`\\` A literal backslash, ‘\’.

`\a` The “alert” character, *`Ctrl-g`*, ASCII code 7 (BEL). (This usually makes some sort of audible noise.)

`\b` Backspace, *`Ctrl-h`*, ASCII code 8 (BS).

`\f` Formfeed, *`Ctrl-l`*, ASCII code 12 (FF).

`\n` Newline, *`Ctrl-j`*, ASCII code 10 (LF).

`\r` Carriage return, *`Ctrl-m`*, ASCII code 13 (CR).

`\t` Horizontal TAB, *`Ctrl-i`*, ASCII code 9 (HT).

`\v` Vertical tab, *`Ctrl-k`*, ASCII code 11 (VT).

`\`*nnn* The octal value *nnn*, where *nnn* stands for 1 to 3 digits between ‘`0`’ and ‘`7`’. For example, the code for the ASCII ESC (escape) character is ‘`\033`’.

`\x`*hh*`...` The hexadecimal value *hh*, where *hh* stands for a sequence of hexadecimal digits ('`0`'–'`9`', and either '`A`'–'`F`' or '`a`'–'`f`'). Like the same construct in ISO C, the escape sequence continues until the first nonhexadecimal digit is seen. However, using more than two hexadecimal digits produces undefined results. (The '`\x`' escape sequence is not allowed in POSIX `awk`.)

`\/` A literal slash (necessary for regexp constants only). This expression is used when you want to write a regexp constant that contains a slash. Because the regexp is delimited by slashes, you need to escape the slash that is part of the pattern, in order to tell `awk` to keep processing the rest of the regexp.

`\"` A literal double quote (necessary for string constants only). This expression is used when you want to write a string constant that contains a double quote. Because the string is delimited by double quotes, you need to escape the quote that is part of the string, in order to tell `awk` to keep processing the rest of the string.

In `gawk`, a number of additional two-character sequences that begin with a backslash have special meaning in regexps. See Section 2.5 [`gawk`-Specific Regexp Operators], page 31.

In a regexp, a backslash before any character that is not in the previous list and not listed in Section 2.5 [`gawk`-Specific Regexp Operators], page 31, means that the next character should be taken literally, even if it would normally be a regexp operator. For example, `/a\+b/` matches the three characters '`a+b`'.

For complete portability, do not use a backslash before any character not shown in the previous list.

To summarize:

- The escape sequences in the table above are always processed first, for both string constants and regexp constants. This happens very early, as soon as `awk` reads your program.
- `gawk` processes both regexp constants and dynamic regexps (see Section 2.8 [Using Dynamic Regexps], page 34), for the special operators listed in Section 2.5 [`gawk`-Specific Regexp Operators], page 31.
- A backslash before any other character means to treat that character literally.

Advanced Notes: Backslash Before Regular Characters

If you place a backslash in a string constant before something that is not one of the characters previously listed, POSIX `awk` purposely leaves what happens as undefined. There are two choices:

Strip the backslash out
: This is what Unix `awk` and `gawk` both do. For example, `"a\qc"` is the same as `"aqc"`. (Because this is such an easy bug both to introduce and to miss, `gawk` warns you about it.) Consider '`FS = "[ \t]+\|[ \t]+"`' to use vertical bars surrounded by whitespace as the field separator. There should be two backslashes in the string '`FS = "[ \t]+\\|[ \t]+"`'.)

Leave the backslash alone
: Some other `awk` implementations do this. In such implementations, typing `"a\qc"` is the same as typing `"a\\qc"`.

Advanced Notes: Escape Sequences for Metacharacters

Suppose you use an octal or hexadecimal escape to represent a regexp metacharacter. (See Section 2.3 [Regular Expression Operators], page 27.) Does `awk` treat the character as a literal character or as a regexp operator?

Historically, such characters were taken literally. However, the POSIX standard indicates that they should be treated as real metacharacters, which is what `gawk` does. In compatibility mode (see Section 11.2 [Command-Line Options], page 173), `gawk` treats the characters represented by octal and hexadecimal escape sequences literally when used in regexp constants. Thus, `/a\52b/` is equivalent to `/a\*b/`.

2.3 Regular Expression Operators

You can combine regular expressions with special characters, called *regular expression operators* or *metacharacters*, to increase the power and versatility of regular expressions.

The escape sequences described earlier in Section 2.2 [Escape Sequences], page 25, are valid inside a regexp. They are introduced by a '\' and are recognized and converted into corresponding real characters as the very first step in processing regexps.

Here is a list of metacharacters. All characters that are not escape sequences and that are not listed in the table stand for themselves:

`\` This is used to suppress the special meaning of a character when matching. For example, '`\$`' matches the character '`$`'.

`^` This matches the beginning of a string. For example, '`^@chapter`' matches '`@chapter`' at the beginning of a string and can be used to identify chapter beginnings in Texinfo source files. The '`^`' is known as an *anchor*, because it anchors the pattern to match only at the beginning of the string.

It is important to realize that '`^`' does not match the beginning of a line embedded in a string. The condition is not true in the following example:

```
if ("line1\nLINE 2" ~ /^L/) ...
```

`$` This is similar to '`^`', but it matches only at the end of a string. For example, '`p$`' matches a record that ends with a '`p`'. The '`$`' is an anchor and does not match the end of a line embedded in a string. The condition in the following example is not true:

```
if ("line1\nLINE 2" ~ /1$/) ...
```

`.` This matches any single character, *including* the newline character. For example, '`.P`' matches any single character followed by a '`P`' in a string. Using concatenation, we can make a regular expression such as '`U.A`', which matches any three-character sequence that begins with '`U`' and ends with '`A`'.

In strict POSIX mode (see Section 11.2 [Command-Line Options], page 173), '`.`' does not match the NUL character, which is a character with all bits equal to zero. Otherwise, NUL is just another character. Other versions of `awk` may not be able to match the NUL character.

`[...]` This is called a *character list*.[1] It matches any *one* of the characters that are enclosed in the square brackets. For example, '`[MVX]`' matches any one of the characters '`M`', '`V`', or '`X`' in a string. A full discussion of what can be inside the square brackets of a character list is given in Section 2.4 [Using Character Lists], page 29.

`[^ ...]` This is a *complemented character list*. The first character after the '`[`' *must* be a '`^`'. It matches any characters *except* those in the square brackets. For example, '`[^awk]`' matches any character that is not an '`a`', '`w`', or '`k`'.

`|` This is the *alternation operator* and it is used to specify alternatives. The '`|`' has the lowest precedence of all the regular expression operators. For example, '`^P|[[:digit:]]`' matches any string that matches either '`^P`' or '`[[:digit:]]`'. This means it matches any string that starts with '`P`' or contains a digit.

The alternation applies to the largest possible regexps on either side.

`(...)` Parentheses are used for grouping in regular expressions, as in arithmetic. They can be used to concatenate regular expressions containing the alternation operator, '`|`'. For example, '`@(samp|code)\{[^}]+\}`' matches both '`@code{foo}`' and '`@samp{bar}`'. (These are Texinfo formatting control sequences. The '`+`' is explained further on in this list.)

`*` This symbol means that the preceding regular expression should be repeated as many times as necessary to find a match. For example, '`ph*`' applies the '`*`' symbol to the preceding '`h`' and looks for matches of one '`p`' followed by any number of '`h`'s. This also matches just '`p`' if no '`h`'s are present.

The '`*`' repeats the *smallest* possible preceding expression. (Use parentheses if you want to repeat a larger expression.) It finds as many repetitions as possible. For example, '`awk '/\(c[ad][ad]*r x\)/ { print }' sample`' prints every record in '`sample`' containing a string of the form '`(car x)`', '`(cdr x)`', '`(cadr x)`', and so on. Notice the escaping of the parentheses by preceding them with backslashes.

`+` This symbol is similar to '`*`', except that the preceding expression must be matched at least once. This means that '`wh+y`' would match '`why`' and '`whhy`', but not '`wy`', whereas '`wh*y`' would match all three of these strings. The following is a simpler way of writing the last '`*`' example:

```
awk '/\(c[ad]+r x\)/ { print }' sample
```

`?` This symbol is similar to '`*`', except that the preceding expression can be matched either once or not at all. For example, '`fe?d`' matches '`fed`' and '`fd`', but nothing else.

`{`*`n`*`}`
`{`*`n`*`,}`
`{`*`n`*`,`*`m`*`}` One or two numbers inside braces denote an *interval expression*. If there is one number in the braces, the preceding regexp is repeated *n* times. If there are

[1] In other literature, you may see a character list referred to as either a *character set*, a *character class*, or a *bracket expression*.

two numbers separated by a comma, the preceding regexp is repeated *n* to *m* times. If there is one number followed by a comma, then the preceding regexp is repeated at least *n* times:

`wh{3}y` Matches '`whhhy`', but not '`why`' or '`whhhhy`'.

`wh{3,5}y` Matches '`whhhy`', '`whhhhy`', or '`whhhhhy`', only.

`wh{2,}y` Matches '`whhy`' or '`whhhy`', and so on.

Interval expressions were not traditionally available in `awk`. They were added as part of the POSIX standard to make `awk` and `egrep` consistent with each other.

However, because old programs may use '`{`' and '`}`' in regexp constants, by default `gawk` does *not* match interval expressions in regexps. If either '`--posix`' or '`--re-interval`' are specified (see Section 11.2 [Command-Line Options], page 173), then interval expressions are allowed in regexps.

For new programs that use '`{`' and '`}`' in regexp constants, it is good practice to always escape them with a backslash. Then the regexp constants are valid and work the way you want them to, using any version of `awk`.[2]

In regular expressions, the '`*`', '`+`', and '`?`' operators, as well as the braces '`{`' and '`}`', have the highest precedence, followed by concatenation, and finally by '`|`'. As in arithmetic, parentheses can change how operators are grouped.

In POSIX `awk` and `gawk`, the '`*`', '`+`', and '`?`' operators stand for themselves when there is nothing in the regexp that precedes them. For example, '`/+/`' matches a literal plus sign. However, many other versions of `awk` treat such a usage as a syntax error.

If `gawk` is in compatibility mode (see Section 11.2 [Command-Line Options], page 173), POSIX character classes and interval expressions are not available in regular expressions.

2.4 Using Character Lists

Within a character list, a *range expression* consists of two characters separated by a hyphen. It matches any single character that sorts between the two characters, using the locale's collating sequence and character set. For example, in the default C locale, '`[a-dx-z]`' is equivalent to '`[abcdxyz]`'. Many locales sort characters in dictionary order, and in these locales, '`[a-dx-z]`' is typically not equivalent to '`[abcdxyz]`'; instead it might be equivalent to '`[aBbCcDdxXyYz]`', for example. To obtain the traditional interpretation of bracket expressions, you can use the C locale by setting the `LC_ALL` environment variable to the value '`C`'.

To include one of the characters '`\`', '`]`', '`-`', or '`^`' in a character list, put a '`\`' in front of it. For example:

```
[d\]]
```

matches either '`d`' or '`]`'.

This treatment of '`\`' in character lists is compatible with other `awk` implementations and is also mandated by POSIX. The regular expressions in `awk` are a superset of the POSIX

[2] Use two backslashes if you're using a string constant with a regexp operator or function.

specification for Extended Regular Expressions (EREs). POSIX EREs are based on the regular expressions accepted by the traditional `egrep` utility.

Character classes are a new feature introduced in the POSIX standard. A character class is a special notation for describing lists of characters that have a specific attribute, but the actual characters can vary from country to country and/or from character set to character set. For example, the notion of what is an alphabetic character differs between the United States and France.

A character class is only valid in a regexp *inside* the brackets of a character list. Character classes consist of '`[:`', a keyword denoting the class, and '`:]`'. Table 2.1 lists the character classes defined by the POSIX standard.

Class	**Meaning**
`[:alnum:]`	Alphanumeric characters.
`[:alpha:]`	Alphabetic characters.
`[:blank:]`	Space and TAB characters.
`[:cntrl:]`	Control characters.
`[:digit:]`	Numeric characters.
`[:graph:]`	Characters that are both printable and visible. (A space is printable but not visible, whereas an '`a`' is both.)
`[:lower:]`	Lowercase alphabetic characters.
`[:print:]`	Printable characters (characters that are not control characters).
`[:punct:]`	Punctuation characters (characters that are not letters, digits, control characters, or space characters).
`[:space:]`	Space characters (such as space, TAB, and formfeed, to name a few).
`[:upper:]`	Uppercase alphabetic characters.
`[:xdigit:]`	Characters that are hexadecimal digits.

Table 2.1: POSIX Character Classes

For example, before the POSIX standard, you had to write `/[A-Za-z0-9]/` to match alphanumeric characters. If your character set had other alphabetic characters in it, this would not match them, and if your character set collated differently from ASCII, this might not even match the ASCII alphanumeric characters. With the POSIX character classes, you can write `/[[:alnum:]]/` to match the alphabetic and numeric characters in your character set.

Two additional special sequences can appear in character lists. These apply to non-ASCII character sets, which can have single symbols (called *collating elements*) that are represented with more than one character. They can also have several characters that are equivalent for *collating*, or sorting, purposes. (For example, in French, a plain "e" and a grave-accented "è" are equivalent.) These sequences are:

Collating symbols
: Multicharacter collating elements enclosed between '`[.`' and '`.]`'. For example, if '`ch`' is a collating element, then `[[.ch.]]` is a regexp that matches this collating element, whereas `[ch]` is a regexp that matches either '`c`' or '`h`'.

Equivalence classes
: Locale-specific names for a list of characters that are equal. The name is enclosed between '`[=`' and '`=]`'. For example, the name '`e`' might be used to represent all of "e," "è," and "é." In this case, `[[=e=]]` is a regexp that matches any of '`e`', '`é`', or '`è`'.

These features are very valuable in non-English-speaking locales.

Caution: The library functions that `gawk` uses for regular expression matching currently recognize only POSIX character classes; they do not recognize collating symbols or equivalence classes.

2.5 `gawk`-Specific Regexp Operators

GNU software that deals with regular expressions provides a number of additional regexp operators. These operators are described in this section and are specific to `gawk`; they are not available in other `awk` implementations. Most of the additional operators deal with word matching. For our purposes, a *word* is a sequence of one or more letters, digits, or underscores ('`_`'):

`\w`
: Matches any word-constituent character—that is, it matches any letter, digit, or underscore. Think of it as shorthand for `[[:alnum:]_]`.

`\W`
: Matches any character that is not word-constituent. Think of it as shorthand for `[^[:alnum:]_]`.

`\<`
: Matches the empty string at the beginning of a word. For example, `/\<away/` matches '`away`' but not '`stowaway`'.

`\>`
: Matches the empty string at the end of a word. For example, `/stow\>/` matches '`stow`' but not '`stowaway`'.

`\y`
: Matches the empty string at either the beginning or the end of a word (i.e., the word boundary). For example, '`\yballs?\y`' matches either '`ball`' or '`balls`', as a separate word.

`\B`
: Matches the empty string that occurs between two word-constituent characters. For example, `/\Brat\B/` matches '`crate`' but it does not match '`dirty rat`'. '`\B`' is essentially the opposite of '`\y`'.

There are two other operators that work on buffers. In Emacs, a *buffer* is, naturally, an Emacs buffer. For other programs, `gawk`'s regexp library routines consider the entire string to match as the buffer. The operators are:

`\‘`
: Matches the empty string at the beginning of a buffer (string).

`\’`
: Matches the empty string at the end of a buffer (string).

Because '`^`' and '`$`' always work in terms of the beginning and end of strings, these operators don't add any new capabilities for `awk`. They are provided for compatibility with other GNU software.

In other GNU software, the word-boundary operator is '`\b`'. However, that conflicts with the `awk` language's definition of '`\b`' as backspace, so `gawk` uses a different letter. An alternative method would have been to require two backslashes in the GNU operators, but

this was deemed too confusing. The current method of using '`\y`' for the GNU '`\b`' appears to be the lesser of two evils.

The various command-line options (see Section 11.2 [Command-Line Options], page 173) control how `gawk` interprets characters in regexps:

No options
: In the default case, `gawk` provides all the facilities of POSIX regexps and the previously described GNU regexp operators. However, interval expressions are not supported.

`--posix`
: Only POSIX regexps are supported; the GNU operators are not special (e.g., '`\w`' matches a literal '`w`'). Interval expressions are allowed.

`--traditional`
: Traditional Unix `awk` regexps are matched. The GNU operators are not special, interval expressions are not available, nor are the POSIX character classes (`[[:alnum:]]`, etc.). Characters described by octal and hexadecimal escape sequences are treated literally, even if they represent regexp metacharacters.

`--re-interval`
: Allow interval expressions in regexps, even if '`--traditional`' has been provided. ('`--posix`' automatically enables interval expressions, so '`--re-interval`' is redundant when '`--posix`' is is used.)

2.6 Case Sensitivity in Matching

Case is normally significant in regular expressions, both when matching ordinary characters (i.e., not metacharacters) and inside character sets. Thus, a '`w`' in a regular expression matches only a lowercase '`w`' and not an uppercase '`W`'.

The simplest way to do a case-independent match is to use a character list—for example, '`[Ww]`'. However, this can be cumbersome if you need to use it often, and it can make the regular expressions harder to read. There are two alternatives that you might prefer.

One way to perform a case-insensitive match at a particular point in the program is to convert the data to a single case, using the `tolower` or `toupper` built-in string functions (which we haven't discussed yet; see Section 8.1.3 [String-Manipulation Functions], page 129). For example:

```
tolower($1) ~ /foo/  { ... }
```

converts the first field to lowercase before matching against it. This works in any POSIX-compliant `awk`.

Another method, specific to `gawk`, is to set the variable `IGNORECASE` to a nonzero value (see Section 6.5 [Built-in Variables], page 107). When `IGNORECASE` is not zero, *all* regexp and string operations ignore case. Changing the value of `IGNORECASE` dynamically controls the case-sensitivity of the program as it runs. Case is significant by default because `IGNORECASE` (like most variables) is initialized to zero:

```
x = "aB"
if (x ~ /ab/) ...   # this test will fail

IGNORECASE = 1
```

```
if (x ~ /ab/) ...   # now it will succeed
```

In general, you cannot use `IGNORECASE` to make certain rules case-insensitive and other rules case-sensitive, because there is no straightforward way to set `IGNORECASE` just for the pattern of a particular rule.[3] To do this, use either character lists or `tolower`. However, one thing you can do with `IGNORECASE` only is dynamically turn case-sensitivity on or off for all the rules at once.

`IGNORECASE` can be set on the command line or in a `BEGIN` rule (see Section 11.3 [Other Command-Line Arguments], page 178; also see Section 6.1.4.1 [Startup and Cleanup Actions], page 96). Setting `IGNORECASE` from the command line is a way to make a program case-insensitive without having to edit it.

Prior to `gawk` 3.0, the value of `IGNORECASE` affected regexp operations only. It did not affect string comparison with '`==`', '`!=`', and so on. Beginning with version 3.0, both regexp and string comparison operations are also affected by `IGNORECASE`.

Beginning with `gawk` 3.0, the equivalences between upper- and lowercase characters are based on the ISO-8859-1 (ISO Latin-1) character set. This character set is a superset of the traditional 128 ASCII characters, which also provides a number of characters suitable for use with European languages.

As of `gawk` 3.1.4, the case equivalencies are fully locale-aware. They are based on the C `<ctype.h>` facilities, such as `isalpha()` and `toupper()`.

The value of `IGNORECASE` has no effect if `gawk` is in compatibility mode (see Section 11.2 [Command-Line Options], page 173). Case is always significant in compatibility mode.

2.7 How Much Text Matches?

Consider the following:

```
echo aaaabcd | awk '{ sub(/a+/, "<A>"); print }'
```

This example uses the `sub` function (which we haven't discussed yet; see Section 8.1.3 [String-Manipulation Functions], page 129) to make a change to the input record. Here, the regexp `/a+/` indicates "one or more '`a`' characters," and the replacement text is '`<A>`'.

The input contains four '`a`' characters. `awk` (and POSIX) regular expressions always match the leftmost, *longest* sequence of input characters that can match. Thus, all four '`a`' characters are replaced with '`<A>`' in this example:

```
$ echo aaaabcd | awk '{ sub(/a+/, "<A>"); print }'
⊣ <A>bcd
```

For simple match/no-match tests, this is not so important. But when doing text matching and substitutions with the `match`, `sub`, `gsub`, and `gensub` functions, it is very important. Understanding this principle is also important for regexp-based record and field splitting (see Section 3.1 [How Input Is Split into Records], page 36, and also see Section 3.5 [Specifying How Fields Are Separated], page 43).

---

[3] Experienced C and C++ programmers will note that it is possible, using something like '`IGNORECASE = 1 && /foObAr/ { ... }`' and '`IGNORECASE = 0 || /foobar/ { ... }`'. However, this is somewhat obscure and we don't recommend it.

2.8 Using Dynamic Regexps

The righthand side of a '`~`' or '`!~`' operator need not be a regexp constant (i.e., a string of characters between slashes). It may be any expression. The expression is evaluated and converted to a string if necessary; the contents of the string are used as the regexp. A regexp that is computed in this way is called a *dynamic regexp*:

```
BEGIN { digits_regexp = "[[:digit:]]+" }
$0 ~ digits_regexp    { print }
```

This sets `digits_regexp` to a regexp that describes one or more digits, and tests whether the input record matches this regexp.

Caution: When using the '`~`' and '`!~`' operators, there is a difference between a regexp constant enclosed in slashes and a string constant enclosed in double quotes. If you are going to use a string constant, you have to understand that the string is, in essence, scanned *twice*: the first time when `awk` reads your program, and the second time when it goes to match the string on the lefthand side of the operator with the pattern on the right. This is true of any string-valued expression (such as `digits_regexp`, shown previously), not just string constants.

What difference does it make if the string is scanned twice? The answer has to do with escape sequences, and particularly with backslashes. To get a backslash into a regular expression inside a string, you have to type two backslashes.

For example, `/\*/` is a regexp constant for a literal '`*`'. Only one backslash is needed. To do the same thing with a string, you have to type `"\\*"`. The first backslash escapes the second one so that the string actually contains the two characters '`\`' and '`*`'.

Given that you can use both regexp and string constants to describe regular expressions, which should you use? The answer is "regexp constants," for several reasons:

- String constants are more complicated to write and more difficult to read. Using regexp constants makes your programs less error-prone. Not understanding the difference between the two kinds of constants is a common source of errors.
- It is more efficient to use regexp constants. `awk` can note that you have supplied a regexp and store it internally in a form that makes pattern matching more efficient. When using a string constant, `awk` must first convert the string into this internal form and then perform the pattern matching.
- Using regexp constants is better form; it shows clearly that you intend a regexp match.

Advanced Notes: Using `\n` in Character Lists of Dynamic Regexps

Some commercial versions of `awk` do not allow the newline character to be used inside a character list for a dynamic regexp:

```
$ awk '$0 ~ "[ \t\n]"'
error  awk: newline in character class [
error  ]...
error   source line number 1
error   context is
error            >>>  <<<
```

But a newline in a regexp constant works with no problem:

```
$ awk '$0 ~ /[ \t\n]/'
here is a sample line
⊣ here is a sample line
Ctrl-d
```

`gawk` does not have this problem, and it isn't likely to occur often in practice, but it's worth noting for future reference.

2.9 Where You Are Makes A Difference

Modern systems support the notion of *locales*: a way to tell the system about the local character set and language. The current locale setting can affect the way regexp matching works, often in surprising ways. In particular, many locales do case-insensitive matching, even when you may have specified characters of only one particular case.

The following example uses the `sub` function, which does text replacement (see Section 8.1.3 [String-Manipulation Functions], page 129). Here, the intent is to remove trailing uppercase characters:

```
$ echo something1234abc | gawk '{ sub("[A-Z]*$", ""); print }'
⊣ something1234
```

This output is unexpected, since the '`abc`' at the end of '`something1234abc`' should not normally match '`[A-Z]*`'. This result is due to the locale setting (and thus you may not see it on your system). There are two fixes. The first is to use the POSIX character class '`[[:upper:]]`', instead of '`[A-Z]`'. The second is to change the locale setting in the environment, before running `gawk`, by using the shell statements:

```
LANG=C LC_ALL=C
export LANG LC_ALL
```

The setting '`C`' forces `gawk` to behave in the traditional Unix manner, where case distinctions do matter. You may wish to put these statements into your shell startup file, e.g., '`$HOME/.profile`'.

Similar considerations apply to other ranges. For example, '`["-/]`' is perfectly valid in ASCII, but is not valid in many Unicode locales, such as '`en_US.UTF-8`'. (In general, such ranges should be avoided; either list the characters individually, or use a POSIX character class such as '`[[:punct:]]`'.)

For the normal case of '`RS = "\n"`', the locale is largely irrelevant. For other single byte record separators, using '`LC_ALL=C`' will give you much better performance when reading records. Otherwise, `gawk` has to make several function calls, *per input character* to find the record terminator.

3 Reading Input Files

In the typical `awk` program, all input is read either from the standard input (by default, this is the keyboard, but often it is a pipe from another command) or from files whose names you specify on the `awk` command line. If you specify input files, `awk` reads them in order, processing all the data from one before going on to the next. The name of the current input file can be found in the built-in variable `FILENAME` (see Section 6.5 [Built-in Variables], page 107).

The input is read in units called *records*, and is processed by the rules of your program one record at a time. By default, each record is one line. Each record is automatically split into chunks called *fields*. This makes it more convenient for programs to work on the parts of a record.

On rare occasions, you may need to use the `getline` command. The `getline` command is valuable, both because it can do explicit input from any number of files, and because the files used with it do not have to be named on the `awk` command line (see Section 3.8 [Explicit Input with `getline`], page 51).

3.1 How Input Is Split into Records

The `awk` utility divides the input for your `awk` program into records and fields. `awk` keeps track of the number of records that have been read so far from the current input file. This value is stored in a built-in variable called `FNR`. It is reset to zero when a new file is started. Another built-in variable, `NR`, is the total number of input records read so far from all data files. It starts at zero, but is never automatically reset to zero.

Records are separated by a character called the *record separator*. By default, the record separator is the newline character. This is why records are, by default, single lines. A different character can be used for the record separator by assigning the character to the built-in variable `RS`.

Like any other variable, the value of `RS` can be changed in the `awk` program with the assignment operator, '`=`' (see Section 5.7 [Assignment Expressions], page 81). The new record-separator character should be enclosed in quotation marks, which indicate a string constant. Often the right time to do this is at the beginning of execution, before any input is processed, so that the very first record is read with the proper separator. To do this, use the special `BEGIN` pattern (see Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96). For example:

```
awk 'BEGIN { RS = "/" }
     { print $0 }' BBS-list
```

changes the value of `RS` to `"/"`, before reading any input. This is a string whose first character is a slash; as a result, records are separated by slashes. Then the input file is read, and the second rule in the `awk` program (the action with no pattern) prints each record. Because each `print` statement adds a newline at the end of its output, this `awk` program copies the input with each slash changed to a newline. Here are the results of running the program on '`BBS-list`':

```
$ awk 'BEGIN { RS = "/" }
>      { print $0 }' BBS-list
 ⊣ aardvark     555-5553     1200
```

```
⊣ 300          B
⊣ alpo-net     555-3412     2400
⊣ 1200
⊣ 300     A
⊣ barfly       555-7685     1200
⊣ 300          A
⊣ bites        555-1675     2400
⊣ 1200
⊣ 300     A
⊣ camelot      555-0542     300               C
⊣ core         555-2912     1200
⊣ 300          C
⊣ fooey        555-1234     2400
⊣ 1200
⊣ 300     B
⊣ foot         555-6699     1200
⊣ 300          B
⊣ macfoo       555-6480     1200
⊣ 300          A
⊣ sdace        555-3430     2400
⊣ 1200
⊣ 300     A
⊣ sabafoo      555-2127     1200
⊣ 300          C
⊣
```

Note that the entry for the '`camelot`' BBS is not split. In the original data file (see Section 1.2 [Data Files for the Examples], page 16), the line looks like this:

```
camelot       555-0542     300               C
```

It has one baud rate only, so there are no slashes in the record, unlike the others which have two or more baud rates. In fact, this record is treated as part of the record for the '`core`' BBS; the newline separating them in the output is the original newline in the data file, not the one added by `awk` when it printed the record!

Another way to change the record separator is on the command line, using the variable-assignment feature (see Section 11.3 [Other Command-Line Arguments], page 178):

```
awk '{ print $0 }' RS="/" BBS-list
```

This sets `RS` to '`/`' before processing '`BBS-list`'.

Using an unusual character such as '`/`' for the record separator produces correct behavior in the vast majority of cases. However, the following (extreme) pipeline prints a surprising '`1`':

```
$ echo | awk 'BEGIN { RS = "a" } ; { print NF }'
⊣ 1
```

There is one field, consisting of a newline. The value of the built-in variable `NF` is the number of fields in the current record.

Reaching the end of an input file terminates the current input record, even if the last character in the file is not the character in `RS`.

The empty string `""` (a string without any characters) has a special meaning as the value of `RS`. It means that records are separated by one or more blank lines and nothing else. See Section 3.7 [Multiple-Line Records], page 49, for more details.

If you change the value of `RS` in the middle of an `awk` run, the new value is used to delimit subsequent records, but the record currently being processed, as well as records already processed, are not affected.

After the end of the record has been determined, `gawk` sets the variable `RT` to the text in the input that matched `RS`. When using `gawk`, the value of `RS` is not limited to a one-character string. It can be any regular expression (see Chapter 2 [Regular Expressions], page 24). In general, each record ends at the next string that matches the regular expression; the next record starts at the end of the matching string. This general rule is actually at work in the usual case, where `RS` contains just a newline: a record ends at the beginning of the next matching string (the next newline in the input), and the following record starts just after the end of this string (at the first character of the following line). The newline, because it matches `RS`, is not part of either record.

When `RS` is a single character, `RT` contains the same single character. However, when `RS` is a regular expression, `RT` contains the actual input text that matched the regular expression.

The following example illustrates both of these features. It sets `RS` equal to a regular expression that matches either a newline or a series of one or more uppercase letters with optional leading and/or trailing whitespace:

```
$ echo record 1 AAAA record 2 BBBB record 3 |
> gawk 'BEGIN { RS = "\n|( *[[:upper:]]+ *)" }
>             { print "Record =", $0, "and RT =", RT }'
⊣ Record = record 1 and RT =  AAAA
⊣ Record = record 2 and RT =  BBBB
⊣ Record = record 3 and RT =
⊣
```

The final line of output has an extra blank line. This is because the value of `RT` is a newline, and the `print` statement supplies its own terminating newline. See Section 13.3.8 [A Simple Stream Editor], page 243, for a more useful example of `RS` as a regexp and `RT`.

If you set `RS` to a regular expression that allows optional trailing text, such as '`RS = "abc(XYZ)?"`' it is possible, due to implementation constraints, that `gawk` may match the leading part of the regular expression, but not the trailing part, particularly if the input text that could match the trailing part is fairly long. `gawk` attempts to avoid this problem, but currently, there's no guarantee that this will never happen.

The use of `RS` as a regular expression and the `RT` variable are `gawk` extensions; they are not available in compatibility mode (see Section 11.2 [Command-Line Options], page 173). In compatibility mode, only the first character of the value of `RS` is used to determine the end of the record.

Advanced Notes: `RS = "\0"` Is Not Portable

There are times when you might want to treat an entire data file as a single record. The only way to make this happen is to give `RS` a value that you know doesn't occur in the input file. This is hard to do in a general way, such that a program always works for arbitrary input files.

You might think that for text files, the NUL character, which consists of a character with all bits equal to zero, is a good value to use for `RS` in this case:

```
BEGIN { RS = "\0" }  # whole file becomes one record?
```

`gawk` in fact accepts this, and uses the NUL character for the record separator. However, this usage is *not* portable to other `awk` implementations.

All other `awk` implementations[1] store strings internally as C-style strings. C strings use the NUL character as the string terminator. In effect, this means that '`RS = "\0"`' is the same as '`RS = ""`'.

The best way to treat a whole file as a single record is to simply read the file in, one record at a time, concatenating each record onto the end of the previous ones.

3.2 Examining Fields

When `awk` reads an input record, the record is automatically *parsed* or separated by the interpreter into chunks called *fields*. By default, fields are separated by *whitespace*, like words in a line. Whitespace in `awk` means any string of one or more spaces, tabs, or newlines;[2] other characters, such as formfeed, vertical tab, etc. that are considered whitespace by other languages, are *not* considered whitespace by `awk`.

The purpose of fields is to make it more convenient for you to refer to these pieces of the record. You don't have to use them—you can operate on the whole record if you want—but fields are what make simple `awk` programs so powerful.

A dollar-sign ('`$`') is used to refer to a field in an `awk` program, followed by the number of the field you want. Thus, `$1` refers to the first field, `$2` to the second, and so on. (Unlike the Unix shells, the field numbers are not limited to single digits. `$127` is the one hundred twenty-seventh field in the record.) For example, suppose the following is a line of input:

```
This seems like a pretty nice example.
```

Here the first field, or `$1`, is '`This`', the second field, or `$2`, is '`seems`', and so on. Note that the last field, `$7`, is '`example.`'. Because there is no space between the '`e`' and the '`.`', the period is considered part of the seventh field.

`NF` is a built-in variable whose value is the number of fields in the current record. `awk` automatically updates the value of `NF` each time it reads a record. No matter how many fields there are, the last field in a record can be represented by `$NF`. So, `$NF` is the same as `$7`, which is '`example.`'. If you try to reference a field beyond the last one (such as `$8` when the record has only seven fields), you get the empty string. (If used in a numeric operation, you get zero.)

The use of `$0`, which looks like a reference to the "zero-th" field, is a special case: it represents the whole input record when you are not interested in specific fields. Here are some more examples:

```
$ awk '$1 ~ /foo/ { print $0 }' BBS-list
⊣ fooey        555-1234     2400/1200/300     B
⊣ foot         555-6699     1200/300          B
⊣ macfoo       555-6480     1200/300          A
```

[1] At least that we know about.

[2] In POSIX `awk`, newlines are not considered whitespace for separating fields.

```
⊣ sabafoo       555-2127      1200/300          C
```

This example prints each record in the file '`BBS-list`' whose first field contains the string '`foo`'. The operator '`~`' is called a *matching operator* (see Section 2.1 [How to Use Regular Expressions], page 24); it tests whether a string (here, the field `$1`) matches a given regular expression.

By contrast, the following example looks for '`foo`' in *the entire record* and prints the first field and the last field for each matching input record:

```
$ awk '/foo/ { print $1, $NF }' BBS-list
⊣ fooey B
⊣ foot B
⊣ macfoo A
⊣ sabafoo C
```

3.3 Nonconstant Field Numbers

The number of a field does not need to be a constant. Any expression in the `awk` language can be used after a '`$`' to refer to a field. The value of the expression specifies the field number. If the value is a string, rather than a number, it is converted to a number. Consider this example:

```
awk '{ print $NR }'
```

Recall that `NR` is the number of records read so far: one in the first record, two in the second, etc. So this example prints the first field of the first record, the second field of the second record, and so on. For the twentieth record, field number 20 is printed; most likely, the record has fewer than 20 fields, so this prints a blank line. Here is another example of using expressions as field numbers:

```
awk '{ print $(2*2) }' BBS-list
```

`awk` evaluates the expression '`(2*2)`' and uses its value as the number of the field to print. The '`*`' sign represents multiplication, so the expression '`2*2`' evaluates to four. The parentheses are used so that the multiplication is done before the '`$`' operation; they are necessary whenever there is a binary operator in the field-number expression. This example, then, prints the hours of operation (the fourth field) for every line of the file '`BBS-list`'. (All of the `awk` operators are listed, in order of decreasing precedence, in Section 5.14 [Operator Precedence (How Operators Nest)], page 90.)

If the field number you compute is zero, you get the entire record. Thus, '`$(2-2)`' has the same value as `$0`. Negative field numbers are not allowed; trying to reference one usually terminates the program. (The POSIX standard does not define what happens when you reference a negative field number. `gawk` notices this and terminates your program. Other `awk` implementations may behave differently.)

As mentioned in Section 3.2 [Examining Fields], page 39, `awk` stores the current record's number of fields in the built-in variable `NF` (also see Section 6.5 [Built-in Variables], page 107). The expression `$NF` is not a special feature—it is the direct consequence of evaluating `NF` and using its value as a field number.

3.4 Changing the Contents of a Field

The contents of a field, as seen by `awk`, can be changed within an `awk` program; this changes what `awk` perceives as the current input record. (The actual input is untouched; `awk` *never* modifies the input file.) Consider the following example and its output:

```
$ awk '{ nboxes = $3 ; $3 = $3 - 10
>        print nboxes, $3 }' inventory-shipped
⊣ 25 15
⊣ 32 22
⊣ 24 14
...
```

The program first saves the original value of field three in the variable `nboxes`. The '`-`' sign represents subtraction, so this program reassigns field three, `$3`, as the original value of field three minus ten: '`$3 - 10`'. (See Section 5.5 [Arithmetic Operators], page 78.) Then it prints the original and new values for field three. (Someone in the warehouse made a consistent mistake while inventorying the red boxes.)

For this to work, the text in field `$3` must make sense as a number; the string of characters must be converted to a number for the computer to do arithmetic on it. The number resulting from the subtraction is converted back to a string of characters that then becomes field three. See Section 5.4 [Conversion of Strings and Numbers], page 77.

When the value of a field is changed (as perceived by `awk`), the text of the input record is recalculated to contain the new field where the old one was. In other words, `$0` changes to reflect the altered field. Thus, this program prints a copy of the input file, with 10 subtracted from the second field of each line:

```
$ awk '{ $2 = $2 - 10; print $0 }' inventory-shipped
⊣ Jan 3 25 15 115
⊣ Feb 5 32 24 226
⊣ Mar 5 24 34 228
...
```

It is also possible to also assign contents to fields that are out of range. For example:

```
$ awk '{ $6 = ($5 + $4 + $3 + $2)
>        print $6 }' inventory-shipped
⊣ 168
⊣ 297
⊣ 301
...
```

We've just created `$6`, whose value is the sum of fields `$2`, `$3`, `$4`, and `$5`. The '`+`' sign represents addition. For the file '`inventory-shipped`', `$6` represents the total number of parcels shipped for a particular month.

Creating a new field changes `awk`'s internal copy of the current input record, which is the value of `$0`. Thus, if you do '`print $0`' after adding a field, the record printed includes the new field, with the appropriate number of field separators between it and the previously existing fields.

This recomputation affects and is affected by `NF` (the number of fields; see Section 3.2 [Examining Fields], page 39). For example, the value of `NF` is set to the number of the

highest field you create. The exact format of `$0` is also affected by a feature that has not been discussed yet: the *output field separator*, `OFS`, used to separate the fields (see Section 4.3 [Output Separators], page 59).

Note, however, that merely *referencing* an out-of-range field does *not* change the value of either `$0` or `NF`. Referencing an out-of-range field only produces an empty string. For example:

```
if ($(NF+1) != "")
    print "can't happen"
else
    print "everything is normal"
```

should print '`everything is normal`', because `NF+1` is certain to be out of range. (See Section 6.4.1 [The `if-else` Statement], page 99, for more information about `awk`'s `if-else` statements. See Section 5.10 [Variable Typing and Comparison Expressions], page 85, for more information about the '`!=`' operator.)

It is important to note that making an assignment to an existing field changes the value of `$0` but does not change the value of `NF`, even when you assign the empty string to a field. For example:

```
$ echo a b c d | awk '{ OFS = ":"; $2 = ""
>                       print $0; print NF }'
⊣ a::c:d
⊣ 4
```

The field is still there; it just has an empty value, denoted by the two colons between '`a`' and '`c`'. This example shows what happens if you create a new field:

```
$ echo a b c d | awk '{ OFS = ":"; $2 = ""; $6 = "new"
>                       print $0; print NF }'
⊣ a::c:d::new
⊣ 6
```

The intervening field, `$5`, is created with an empty value (indicated by the second pair of adjacent colons), and `NF` is updated with the value six.

Decrementing `NF` throws away the values of the fields after the new value of `NF` and recomputes `$0`. Here is an example:

```
$ echo a b c d e f | awk '{ print "NF =", NF;
>                            NF = 3; print $0 }'
⊣ NF = 6
⊣ a b c
```

Caution: Some versions of `awk` don't rebuild `$0` when `NF` is decremented. Caveat emptor.

Finally, there are times when it is convenient to force `awk` to rebuild the entire record, using the current value of the fields and `OFS`. To do this, use the seemingly innocuous assignment:

```
$1 = $1   # force record to be reconstituted
print $0  # or whatever else with $0
```

This forces `awk` rebuild the record. It does help to add a comment, as we've shown here.

There is a flip side to the relationship between `$0` and the fields. Any assignment to `$0` causes the record to be reparsed into fields using the *current* value of `FS`. This also

applies to any built-in function that updates `$0`, such as `sub` and `gsub` (see Section 8.1.3 [String-Manipulation Functions], page 129).

3.5 Specifying How Fields Are Separated

The *field separator*, which is either a single character or a regular expression, controls the way `awk` splits an input record into fields. `awk` scans the input record for character sequences that match the separator; the fields themselves are the text between the matches.

In the examples that follow, we use the bullet symbol (•) to represent spaces in the output. If the field separator is '`oo`', then the following line:

```
moo goo gai pan
```

is split into three fields: '`m`', '`•g`', and '`•gai•pan`'. Note the leading spaces in the values of the second and third fields.

The field separator is represented by the built-in variable `FS`. Shell programmers take note: `awk` does *not* use the name `IFS` that is used by the POSIX-compliant shells (such as the Unix Bourne shell, `sh`, or `bash`).

The value of `FS` can be changed in the `awk` program with the assignment operator, '`=`' (see Section 5.7 [Assignment Expressions], page 81). Often the right time to do this is at the beginning of execution before any input has been processed, so that the very first record is read with the proper separator. To do this, use the special `BEGIN` pattern (see Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96). For example, here we set the value of `FS` to the string `","`:

```
awk 'BEGIN { FS = "," } ; { print $2 }'
```

Given the input line:

```
John Q. Smith, 29 Oak St., Walamazoo, MI 42139
```

this `awk` program extracts and prints the string '`•29•Oak•St.`'.

Sometimes the input data contains separator characters that don't separate fields the way you thought they would. For instance, the person's name in the example we just used might have a title or suffix attached, such as:

```
John Q. Smith, LXIX, 29 Oak St., Walamazoo, MI 42139
```

The same program would extract '`•LXIX`', instead of '`•29•Oak•St.`'. If you were expecting the program to print the address, you would be surprised. The moral is to choose your data layout and separator characters carefully to prevent such problems. (If the data is not in a form that is easy to process, perhaps you can massage it first with a separate `awk` program.)

Fields are normally separated by whitespace sequences (spaces, tabs, and newlines), not by single spaces. Two spaces in a row do not delimit an empty field. The default value of the field separator `FS` is a string containing a single space, `" "`. If `awk` interpreted this value in the usual way, each space character would separate fields, so two spaces in a row would make an empty field between them. The reason this does not happen is that a single space as the value of `FS` is a special case—it is taken to specify the default manner of delimiting fields.

If `FS` is any other single character, such as `","`, then each occurrence of that character separates two fields. Two consecutive occurrences delimit an empty field. If the character occurs at the beginning or the end of the line, that too delimits an empty field. The space character is the only single character that does not follow these rules.

3.5.1 Using Regular Expressions to Separate Fields

The previous subsection discussed the use of single characters or simple strings as the value of `FS`. More generally, the value of `FS` may be a string containing any regular expression. In this case, each match in the record for the regular expression separates fields. For example, the assignment:

```
FS = ", \t"
```

makes every area of an input line that consists of a comma followed by a space and a TAB into a field separator.

For a less trivial example of a regular expression, try using single spaces to separate fields the way single commas are used. `FS` can be set to `"[ ]"` (left bracket, space, right bracket). This regular expression matches a single space and nothing else (see Chapter 2 [Regular Expressions], page 24).

There is an important difference between the two cases of '`FS = " "`' (a single space) and '`FS = "[ \t\n]+"`' (a regular expression matching one or more spaces, tabs, or newlines). For both values of `FS`, fields are separated by *runs* (multiple adjacent occurrences) of spaces, tabs, and/or newlines. However, when the value of `FS` is `" "`, `awk` first strips leading and trailing whitespace from the record and then decides where the fields are. For example, the following pipeline prints '`b`':

```
$ echo ' a b c d ' | awk '{ print $2 }'
⊣ b
```

However, this pipeline prints '`a`' (note the extra spaces around each letter):

```
$ echo ' a  b  c  d ' | awk 'BEGIN { FS = "[ \t\n]+" }
>                                  { print $2 }'
⊣ a
```

In this case, the first field is *null* or empty.

The stripping of leading and trailing whitespace also comes into play whenever `$0` is recomputed. For instance, study this pipeline:

```
$ echo '   a b c d' | awk '{ print; $2 = $2; print }'
⊣    a b c d
⊣ a b c d
```

The first `print` statement prints the record as it was read, with leading whitespace intact. The assignment to `$2` rebuilds `$0` by concatenating `$1` through `$NF` together, separated by the value of `OFS`. Because the leading whitespace was ignored when finding `$1`, it is not part of the new `$0`. Finally, the last `print` statement prints the new `$0`.

3.5.2 Making Each Character a Separate Field

There are times when you may want to examine each character of a record separately. This can be done in `gawk` by simply assigning the null string (`""`) to `FS`. In this case, each individual character in the record becomes a separate field. For example:

```
$ echo a b | gawk 'BEGIN { FS = "" }
>                 {
>                     for (i = 1; i <= NF; i = i + 1)
>                         print "Field", i, "is", $i
>                 }'
```

```
⊣ Field 1 is a
⊣ Field 2 is
⊣ Field 3 is b
```

Traditionally, the behavior of FS equal to "" was not defined. In this case, most versions of Unix awk simply treat the entire record as only having one field. In compatibility mode (see Section 11.2 [Command-Line Options], page 173), if FS is the null string, then gawk also behaves this way.

3.5.3 Setting FS from the Command Line

FS can be set on the command line. Use the '-F' option to do so. For example:

```
awk -F, 'program' input-files
```

sets FS to the ',' character. Notice that the option uses an uppercase 'F' instead of a lowercase 'f'. The latter option ('-f') specifies a file containing an awk program. Case is significant in command-line options: the '-F' and '-f' options have nothing to do with each other. You can use both options at the same time to set the FS variable *and* get an awk program from a file.

The value used for the argument to '-F' is processed in exactly the same way as assignments to the built-in variable FS. Any special characters in the field separator must be escaped appropriately. For example, to use a '\' as the field separator on the command line, you would have to type:

```
# same as FS = "\\"
awk -F\\\\ '...' files ...
```

Because '\' is used for quoting in the shell, awk sees '-F\\'. Then awk processes the '\\' for escape characters (see Section 2.2 [Escape Sequences], page 25), finally yielding a single '\' to use for the field separator.

As a special case, in compatibility mode (see Section 11.2 [Command-Line Options], page 173), if the argument to '-F' is 't', then FS is set to the TAB character. If you type '-F\t' at the shell, without any quotes, the '\' gets deleted, so awk figures that you really want your fields to be separated with tabs and not 't's. Use '-v FS="t"' or '-F"[t]"' on the command line if you really do want to separate your fields with 't's.

For example, let's use an awk program file called 'baud.awk' that contains the pattern /300/ and the action 'print $1':

```
/300/   { print $1 }
```

Let's also set FS to be the '-' character and run the program on the file 'BBS-list'. The following command prints a list of the names of the bulletin boards that operate at 300 baud and the first three digits of their phone numbers:

```
$ awk -F- -f baud.awk BBS-list
⊣ aardvark     555
⊣ alpo
⊣ barfly       555
⊣ bites        555
⊣ camelot      555
⊣ core         555
⊣ fooey        555
```

```
⊣ foot          555
⊣ macfoo        555
⊣ sdace         555
⊣ sabafoo       555
```

Note the second line of output. The second line in the original file looked like this:

```
alpo-net      555-3412      2400/1200/300      A
```

The '`-`' as part of the system's name was used as the field separator, instead of the '`-`' in the phone number that was originally intended. This demonstrates why you have to be careful in choosing your field and record separators.

Perhaps the most common use of a single character as the field separator occurs when processing the Unix system password file. On many Unix systems, each user has a separate entry in the system password file, one line per user. The information in these lines is separated by colons. The first field is the user's logon name and the second is the user's (encrypted or shadow) password. A password file entry might look like this:

```
arnold:xyzzy:2076:10:Arnold Robbins:/home/arnold:/bin/bash
```

The following program searches the system password file and prints the entries for users who have no password:

```
awk -F: '$2 == ""' /etc/passwd
```

3.5.4 Field-Splitting Summary

It is important to remember that when you assign a string constant as the value of `FS`, it undergoes normal `awk` string processing. For example, with Unix `awk` and `gawk`, the assignment '`FS = "\.."`' assigns the character string `"."` to `FS` (the backslash is stripped). This creates a regexp meaning "fields are separated by occurrences of any two characters." If instead you want fields to be separated by a literal period followed by any single character, use '`FS = "\\.."`'.

The following table summarizes how fields are split, based on the value of `FS` ('`==`' means "is equal to"):

`FS == " "` Fields are separated by runs of whitespace. Leading and trailing whitespace are ignored. This is the default.

`FS ==` *any other single character*
: Fields are separated by each occurrence of the character. Multiple successive occurrences delimit empty fields, as do leading and trailing occurrences. The character can even be a regexp metacharacter; it does not need to be escaped.

`FS ==` *regexp*
: Fields are separated by occurrences of characters that match *regexp*. Leading and trailing matches of *regexp* delimit empty fields.

`FS == ""` Each individual character in the record becomes a separate field. (This is a `gawk` extension; it is not specified by the POSIX standard.)

Advanced Notes: Changing `FS` Does Not Affect the Fields

According to the POSIX standard, `awk` is supposed to behave as if each record is split into fields at the time it is read. In particular, this means that if you change the value of `FS`

after a record is read, the value of the fields (i.e., how they were split) should reflect the old value of `FS`, not the new one.

However, many implementations of `awk` do not work this way. Instead, they defer splitting the fields until a field is actually referenced. The fields are split using the *current* value of `FS`! This behavior can be difficult to diagnose. The following example illustrates the difference between the two methods. (The `sed`[3] command prints just the first line of '`/etc/passwd`'.)



```
sed 1q /etc/passwd | awk '{ FS = ":" ; print $1 }'
```

which usually prints:

```
root
```

on an incorrect implementation of `awk`, while `gawk` prints something like:

```
root:nSijPlPhZZwgE:0:0:Root:/:
```

Advanced Notes: `FS` and `IGNORECASE`

The `IGNORECASE` variable (see Section 6.5.1 [Built-in Variables That Control `awk`], page 107) affects field splitting *only* when the value of `FS` is a regexp. It has no effect when `FS` is a single character, even if that character is a letter. Thus, in the following code:

```
FS = "c"
IGNORECASE = 1
$0 = "aCa"
print $1
```

The output is '`aCa`'. If you really want to split fields on an alphabetic character while ignoring case, use a regexp that will do it for you. E.g., '`FS = "[c]"`'. In this case, `IGNORECASE` will take effect.

3.6 Reading Fixed-Width Data

> **NOTE:** This section discusses an advanced feature of `gawk`. If you are a novice `awk` user, you might want to skip it on the first reading.

`gawk` version 2.13 introduced a facility for dealing with fixed-width fields with no distinctive field separator. For example, data of this nature arises in the input for old Fortran programs where numbers are run together, or in the output of programs that did not anticipate the use of their output as input for other programs.

An example of the latter is a table where all the columns are lined up by the use of a variable number of spaces and *empty fields are just spaces*. Clearly, `awk`'s normal field splitting based on `FS` does not work well in this case. Although a portable `awk` program can use a series of `substr` calls on `$0` (see Section 8.1.3 [String-Manipulation Functions], page 129), this is awkward and inefficient for a large number of fields.

The splitting of an input record into fixed-width fields is specified by assigning a string containing space-separated numbers to the built-in variable `FIELDWIDTHS`. Each number specifies the width of the field, *including* columns between fields. If you want to ignore the columns between fields, you can specify the width as a separate field that is subsequently ignored. It is a fatal error to supply a field width that is not a positive number. The following data is the output of the Unix `w` utility. It is useful to illustrate the use of `FIELDWIDTHS`:

[3] The `sed` utility is a "stream editor." Its behavior is also defined by the POSIX standard.

```
 10:06pm  up 21 days, 14:04,  23 users
User     tty       login  idle   JCPU   PCPU  what
hzuo     ttyV0     8:58pm            9      5  vi p24.tex
hzang    ttyV3     6:37pm    50                -csh
eklye    ttyV5     9:53pm            7      1  em thes.tex
dportein ttyV6     8:17pm  1:47                -csh
gierd    ttyD3    10:00pm     1                elm
dave     ttyD4     9:47pm            4      4  w
brent    ttyp0    26Jun91  4:46  26:46   4:41  bash
dave     ttyq4    26Jun9115days     46     46  wnewmail
```

The following program takes the above input, converts the idle time to number of seconds, and prints out the first two fields and the calculated idle time:

NOTE: This program uses a number of `awk` features that haven't been introduced yet.

```
BEGIN  { FIELDWIDTHS = "9 6 10 6 7 7 35" }
NR > 2 {
    idle = $4
    sub(/^  */, "", idle)   # strip leading spaces
    if (idle == "")
        idle = 0
    if (idle ~ /:/) {
        split(idle, t, ":")
        idle = t[1] * 60 + t[2]
    }
    if (idle ~ /days/)
        idle *= 24 * 60 * 60

    print $1, $2, idle
}
```

Running the program on the data produces the following results:

```
hzuo      ttyV0  0
hzang     ttyV3  50
eklye     ttyV5  0
dportein  ttyV6  107
gierd     ttyD3  1
dave      ttyD4  0
brent     ttyp0  286
dave      ttyq4  1296000
```

Another (possibly more practical) example of fixed-width input data is the input from a deck of balloting cards. In some parts of the United States, voters mark their choices by punching holes in computer cards. These cards are then processed to count the votes for any particular candidate or on any particular issue. Because a voter may choose not to vote on some issue, any column on the card may be empty. An `awk` program for processing such data could use the `FIELDWIDTHS` feature to simplify reading the data. (Of course, getting `gawk` to run on a system with card readers is another story!)

Assigning a value to FS causes gawk to use FS for field splitting again. Use 'FS = FS' to make this happen, without having to know the current value of FS. In order to tell which kind of field splitting is in effect, use PROCINFO["FS"] (see Section 6.5.2 [Built-in Variables That Convey Information], page 110). The value is "FS" if regular field splitting is being used, or it is "FIELDWIDTHS" if fixed-width field splitting is being used:

```
if (PROCINFO["FS"] == "FS")
    regular field splitting ...
else
    fixed-width field splitting ...
```

This information is useful when writing a function that needs to temporarily change FS or FIELDWIDTHS, read some records, and then restore the original settings (see Section 12.5 [Reading the User Database], page 201, for an example of such a function).

3.7 Multiple-Line Records

In some databases, a single line cannot conveniently hold all the information in one entry. In such cases, you can use multiline records. The first step in doing this is to choose your data format.

One technique is to use an unusual character or string to separate records. For example, you could use the formfeed character (written '\f' in awk, as in C) to separate them, making each record a page of the file. To do this, just set the variable RS to "\f" (a string containing the formfeed character). Any other character could equally well be used, as long as it won't be part of the data in a record.

Another technique is to have blank lines separate records. By a special dispensation, an empty string as the value of RS indicates that records are separated by one or more blank lines. When RS is set to the empty string, each record always ends at the first blank line encountered. The next record doesn't start until the first nonblank line that follows. No matter how many blank lines appear in a row, they all act as one record separator. (Blank lines must be completely empty; lines that contain only whitespace do not count.)

You can achieve the same effect as 'RS = ""' by assigning the string "\n\n+" to RS. This regexp matches the newline at the end of the record and one or more blank lines after the record. In addition, a regular expression always matches the longest possible sequence when there is a choice (see Section 2.7 [How Much Text Matches?], page 33). So the next record doesn't start until the first nonblank line that follows—no matter how many blank lines appear in a row, they are considered one record separator.

There is an important difference between 'RS = ""' and 'RS = "\n\n+"'. In the first case, leading newlines in the input data file are ignored, and if a file ends without extra blank lines after the last record, the final newline is removed from the record. In the second case, this special processing is not done.

Now that the input is separated into records, the second step is to separate the fields in the record. One way to do this is to divide each of the lines into fields in the normal manner. This happens by default as the result of a special feature. When RS is set to the empty string, *and* FS is a set to a single character, the newline character *always* acts as a field separator. This is in addition to whatever field separations result from FS.[4]

[4] When FS is the null string ("") or a regexp, this special feature of RS does not apply. It does apply to the default field separator of a single space: 'FS = " "'.

The original motivation for this special exception was probably to provide useful behavior in the default case (i.e., `FS` is equal to `" "`). This feature can be a problem if you really don't want the newline character to separate fields, because there is no way to prevent it. However, you can work around this by using the `split` function to break up the record manually (see Section 8.1.3 [String-Manipulation Functions], page 129). If you have a single character field separator, you can work around the special feature in a different way, by making `FS` into a regexp for that single character. For example, if the field separator is a percent character, instead of '`FS = "%"`', use '`FS = "[%]"`'.

Another way to separate fields is to put each field on a separate line: to do this, just set the variable `FS` to the string `"\n"`. (This single character seperator matches a single newline.) A practical example of a data file organized this way might be a mailing list, where each entry is separated by blank lines. Consider a mailing list in a file named '`addresses`', which looks like this:

```
Jane Doe
123 Main Street
Anywhere, SE 12345-6789

John Smith
456 Tree-lined Avenue
Smallville, MW 98765-4321
...
```

A simple program to process this file is as follows:

```
# addrs.awk --- simple mailing list program

# Records are separated by blank lines.
# Each line is one field.
BEGIN { RS = "" ; FS = "\n" }

{
      print "Name is:", $1
      print "Address is:", $2
      print "City and State are:", $3
      print ""
}
```

Running the program produces the following output:

```
$ awk -f addrs.awk addresses
⊣ Name is: Jane Doe
⊣ Address is: 123 Main Street
⊣ City and State are: Anywhere, SE 12345-6789
⊣
⊣ Name is: John Smith
⊣ Address is: 456 Tree-lined Avenue
⊣ City and State are: Smallville, MW 98765-4321
⊣
...
```

See Section 13.3.4 [Printing Mailing Labels], page 235, for a more realistic program that deals with address lists. The following table summarizes how records are split, based on the value of `RS`:

`RS == "\n"`
: Records are separated by the newline character ('`\n`'). In effect, every line in the data file is a separate record, including blank lines. This is the default.

`RS ==` *`any single character`*
: Records are separated by each occurrence of the character. Multiple successive occurrences delimit empty records.

`RS == ""`
: Records are separated by runs of blank lines. The newline character always serves as a field separator, in addition to whatever value `FS` may have. Leading and trailing newlines in a file are ignored.

`RS ==` *`regexp`*
: Records are separated by occurrences of characters that match *regexp*. Leading and trailing matches of *regexp* delimit empty records. (This is a `gawk` extension; it is not specified by the POSIX standard.)

In all cases, `gawk` sets `RT` to the input text that matched the value specified by `RS`.

3.8 Explicit Input with `getline`

So far we have been getting our input data from `awk`'s main input stream—either the standard input (usually your terminal, sometimes the output from another program) or from the files specified on the command line. The `awk` language has a special built-in command called `getline` that can be used to read input under your explicit control.

The `getline` command is used in several different ways and should *not* be used by beginners. The examples that follow the explanation of the `getline` command include material that has not been covered yet. Therefore, come back and study the `getline` command *after* you have reviewed the rest of this book and have a good knowledge of how `awk` works.

The `getline` command returns one if it finds a record and zero if it encounters the end of the file. If there is some error in getting a record, such as a file that cannot be opened, then `getline` returns -1. In this case, `gawk` sets the variable `ERRNO` to a string describing the error that occurred.

In the following examples, *command* stands for a string value that represents a shell command.

3.8.1 Using `getline` with No Arguments

The `getline` command can be used without arguments to read input from the current input file. All it does in this case is read the next input record and split it up into fields. This is useful if you've finished processing the current record, but want to do some special processing on the next record *right now*. For example:

```
{
     if ((t = index($0, "/*")) != 0) {
          # value of 'tmp' will be "" if t is 1
```

```
            tmp = substr($0, 1, t - 1)
            u = index(substr($0, t + 2), "*/")
            while (u == 0) {
                 if (getline <= 0) {
                      m = "unexpected EOF or error"
                      m = (m ": " ERRNO)
                      print m > "/dev/stderr"
                      exit
                 }
                 t = -1
                 u = index($0, "*/")
            }
            # substr expression will be "" if */
            # occurred at end of line
            $0 = tmp substr($0, u + 2)
       }
       print $0
}
```

This `awk` program deletes all C-style comments (‘`/* ... */`’) from the input. By replacing the ‘`print $0`’ with other statements, you could perform more complicated processing on the decommented input, such as searching for matches of a regular expression. (This program has a subtle problem—it does not work if one comment ends and another begins on the same line.)

This form of the `getline` command sets `NF`, `NR`, `FNR`, and the value of `$0`.

> **NOTE:** The new value of `$0` is used to test the patterns of any subsequent rules. The original value of `$0` that triggered the rule that executed `getline` is lost. By contrast, the `next` statement reads a new record but immediately begins processing it normally, starting with the first rule in the program. See Section 6.4.8 [The `next` Statement], page 105.

3.8.2 Using `getline` into a Variable

You can use ‘`getline` *var*’ to read the next record from `awk`’s input into the variable *var*. No other processing is done. For example, suppose the next line is a comment or a special string, and you want to read it without triggering any rules. This form of `getline` allows you to read that line and store it in a variable so that the main read-a-line-and-check-each-rule loop of `awk` never sees it. The following example swaps every two lines of input:

```
{
       if ((getline tmp) > 0) {
            print tmp
            print $0
       } else
            print $0
}
```

It takes the following list:

```
wan
```

```
tew
free
phore
```

and produces these results:

```
tew
wan
phore
free
```

The `getline` command used in this way sets only the variables `NR` and `FNR` (and of course, *var*). The record is not split into fields, so the values of the fields (including `$0`) and the value of `NF` do not change.

3.8.3 Using `getline` from a File

Use '`getline < file`' to read the next record from *file*. Here *file* is a string-valued expression that specifies the file name. '`< file`' is called a *redirection* because it directs input to come from a different place. For example, the following program reads its input record from the file '`secondary.input`' when it encounters a first field with a value equal to 10 in the current input file:

```
{
    if ($1 == 10) {
         getline < "secondary.input"
         print
    } else
         print
}
```

Because the main input stream is not used, the values of `NR` and `FNR` are not changed. However, the record it reads is split into fields in the normal manner, so the values of `$0` and the other fields are changed, resulting in a new value of `NF`.

According to POSIX, '`getline < expression`' is ambiguous if *expression* contains unparenthesized operators other than '`$`'; for example, '`getline < dir "/" file`' is ambiguous because the concatenation operator is not parenthesized. You should write it as '`getline < (dir "/" file)`' if you want your program to be portable to other `awk` implementations.

3.8.4 Using `getline` into a Variable from a File

Use '`getline var < file`' to read input from the file *file*, and put it in the variable *var*. As above, *file* is a string-valued expression that specifies the file from which to read.

In this version of `getline`, none of the built-in variables are changed and the record is not split into fields. The only variable changed is *var*. For example, the following program copies all the input files to the output, except for records that say '`@include filename`'. Such a record is replaced by the contents of the file *filename*:

```
{
     if (NF == 2 && $1 == "@include") {
          while ((getline line < $2) > 0)
               print line
          close($2)
```

```
        } else
                print
}
```

Note here how the name of the extra input file is not built into the program; it is taken directly from the data, specifically from the second field on the '`@include`' line.

The `close` function is called to ensure that if two identical '`@include`' lines appear in the input, the entire specified file is included twice. See Section 4.8 [Closing Input and Output Redirections], page 70.

One deficiency of this program is that it does not process nested '`@include`' statements (i.e., '`@include`' statements in included files) the way a true macro preprocessor would. See Section 13.3.9 [An Easy Way to Use Library Functions], page 244, for a program that does handle nested '`@include`' statements.

3.8.5 Using `getline` from a Pipe

The output of a command can also be piped into `getline`, using '*command* `| getline`'. In this case, the string *command* is run as a shell command and its output is piped into `awk` to be used as input. This form of `getline` reads one record at a time from the pipe. For example, the following program copies its input to its output, except for lines that begin with '`@execute`', which are replaced by the output produced by running the rest of the line as a shell command:

```
{
        if ($1 == "@execute") {
                tmp = substr($0, 10)
                while ((tmp | getline) > 0)
                        print
                close(tmp)
        } else
                print
}
```

The `close` function is called to ensure that if two identical '`@execute`' lines appear in the input, the command is run for each one. Given the input:

```
foo
bar
baz
@execute who
bletch
```

the program might produce:

```
foo
bar
baz
arnold     ttyv0   Jul 13 14:22
miriam     ttyp0   Jul 13 14:23     (murphy:0)
bill       ttyp1   Jul 13 14:23     (murphy:0)
bletch
```

Notice that this program ran the command `who` and printed the previous result. (If you try this program yourself, you will of course get different results, depending upon who is logged in on your system.)

This variation of `getline` splits the record into fields, sets the value of `NF`, and recomputes the value of `$0`. The values of `NR` and `FNR` are not changed.

According to POSIX, '*expression* `|` `getline`' is ambiguous if *expression* contains unparenthesized operators other than '`$`'—for example, '`"echo " "date" | getline`' is ambiguous because the concatenation operator is not parenthesized. You should write it as '`("echo " "date") | getline`' if you want your program to be portable to other `awk` implementations.

3.8.6 Using `getline` into a Variable from a Pipe

When you use '*command* `|` `getline` *var*', the output of *command* is sent through a pipe to `getline` and into the variable *var*. For example, the following program reads the current date and time into the variable `current_time`, using the `date` utility, and then prints it:

```
BEGIN {
     "date" | getline current_time
     close("date")
     print "Report printed on " current_time
}
```

In this version of `getline`, none of the built-in variables are changed and the record is not split into fields.

3.8.7 Using `getline` from a Coprocess

Input into `getline` from a pipe is a one-way operation. The command that is started with '*command* `|` `getline`' only sends data *to* your `awk` program.

On occasion, you might want to send data to another program for processing and then read the results back. `gawk` allows you start a *coprocess*, with which two-way communications are possible. This is done with the '`|&`' operator. Typically, you write data to the coprocess first and then read results back, as shown in the following:

```
print "some query" |& "db_server"
"db_server" |& getline
```

which sends a query to `db_server` and then reads the results.

The values of `NR` and `FNR` are not changed, because the main input stream is not used. However, the record is split into fields in the normal manner, thus changing the values of `$0`, of the other fields, and of `NF`.

Coprocesses are an advanced feature. They are discussed here only because this is the section on `getline`. See Section 10.2 [Two-Way Communications with Another Process], page 166, where coprocesses are discussed in more detail.

3.8.8 Using `getline` into a Variable from a Coprocess

When you use '*command* `|&` `getline` *var*', the output from the coprocess *command* is sent through a two-way pipe to `getline` and into the variable *var*.

In this version of `getline`, none of the built-in variables are changed and the record is not split into fields. The only variable changed is *var*.

3.8.9 Points to Remember About `getline`

Here are some miscellaneous points about `getline` that you should bear in mind:

- When `getline` changes the value of `$0` and `NF`, `awk` does *not* automatically jump to the start of the program and start testing the new record against every pattern. However, the new record is tested against any subsequent rules.
- Many `awk` implementations limit the number of pipelines that an `awk` program may have open to just one. In `gawk`, there is no such limit. You can open as many pipelines (and coprocesses) as the underlying operating system permits.
- An interesting side effect occurs if you use `getline` without a redirection inside a `BEGIN` rule. Because an unredirected `getline` reads from the command-line data files, the first `getline` command causes `awk` to set the value of `FILENAME`. Normally, `FILENAME` does not have a value inside `BEGIN` rules, because you have not yet started to process the command-line data files. (See Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96, also see Section 6.5.2 [Built-in Variables That Convey Information], page 110.)
- Using `FILENAME` with `getline` (‘`getline < FILENAME`’) is likely to be a source for confusion. `awk` opens a separate input stream from the current input file. However, by not using a variable, `$0` and `NR` are still updated. If you’re doing this, it’s probably by accident, and you should reconsider what it is you’re trying to accomplish.

3.8.10 Summary of `getline` Variants

Table 3.1 summarizes the eight variants of `getline`, listing which built-in variables are set by each one.

Variant	Effect
`getline`	Sets `$0`, `NF`, `FNR`, and `NR`
`getline` *var*	Sets *var*, `FNR`, and `NR`
`getline <` *file*	Sets `$0` and `NF`
`getline` *var* `<` *file*	Sets *var*
command `| getline`	Sets `$0` and `NF`
command `| getline` *var*	Sets *var*
command `|& getline`	Sets `$0` and `NF`. This is a `gawk` extension
command `|& getline` *var*	Sets *var*. This is a `gawk` extension

Table 3.1: getline Variants and What They Set

4 Printing Output

One of the most common programming actions is to *print*, or output, some or all of the input. Use the `print` statement for simple output, and the `printf` statement for fancier formatting. The `print` statement is not limited when computing *which* values to print. However, with two exceptions, you cannot specify *how* to print them—how many columns, whether to use exponential notation or not, and so on. (For the exceptions, see Section 4.3 [Output Separators], page 59, and Section 4.4 [Controlling Numeric Output with `print`], page 59.) For printing with specifications, you need the `printf` statement (see Section 4.5 [Using `printf` Statements for Fancier Printing], page 60).

Besides basic and formatted printing, this chapter also covers I/O redirections to files and pipes, introduces the special file names that `gawk` processes internally, and discusses the `close` built-in function.

4.1 The `print` Statement

The `print` statement is used to produce output with simple, standardized formatting. Specify only the strings or numbers to print, in a list separated by commas. They are output, separated by single spaces, followed by a newline. The statement looks like this:

```
print item1, item2, ...
```

The entire list of items may be optionally enclosed in parentheses. The parentheses are necessary if any of the item expressions uses the '`>`' relational operator; otherwise it could be confused with a redirection (see Section 4.6 [Redirecting Output of `print` and `printf`], page 65).

The items to print can be constant strings or numbers, fields of the current record (such as `$1`), variables, or any `awk` expression. Numeric values are converted to strings and then printed.

The simple statement '`print`' with no items is equivalent to '`print $0`': it prints the entire current record. To print a blank line, use '`print ""`', where `""` is the empty string. To print a fixed piece of text, use a string constant, such as `"Don't Panic"`, as one item. If you forget to use the double-quote characters, your text is taken as an `awk` expression, and you will probably get an error. Keep in mind that a space is printed between any two items.

4.2 Examples of `print` Statements

Each `print` statement makes at least one line of output. However, it isn't limited to only one line. If an item value is a string that contains a newline, the newline is output along with the rest of the string. A single `print` statement can make any number of lines this way.

The following is an example of printing a string that contains embedded newlines (the '`\n`' is an escape sequence, used to represent the newline character; see Section 2.2 [Escape Sequences], page 25):

```
$ awk 'BEGIN { print "line one\nline two\nline three" }'
⊣ line one
⊣ line two
```

```
⊣ line three
```

The next example, which is run on the '`inventory-shipped`' file, prints the first two fields of each input record, with a space between them:

```
$ awk '{ print $1, $2 }' inventory-shipped
⊣ Jan 13
⊣ Feb 15
⊣ Mar 15
...
```

A common mistake in using the `print` statement is to omit the comma between two items. This often has the effect of making the items run together in the output, with no space. The reason for this is that juxtaposing two string expressions in `awk` means to concatenate them. Here is the same program, without the comma:

```
$ awk '{ print $1 $2 }' inventory-shipped
⊣ Jan13
⊣ Feb15
⊣ Mar15
...
```

To someone unfamiliar with the '`inventory-shipped`' file, neither example's output makes much sense. A heading line at the beginning would make it clearer. Let's add some headings to our table of months (`$1`) and green crates shipped (`$2`). We do this using the `BEGIN` pattern (see Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96) so that the headings are only printed once:

```
awk 'BEGIN {  print "Month Crates"
              print "-----  ------" }
           {  print $1, $2 }' inventory-shipped
```

When run, the program prints the following:

```
Month Crates
-----  ------
Jan 13
Feb 15
Mar 15
...
```

The only problem, however, is that the headings and the table data don't line up! We can fix this by printing some spaces between the two fields:

```
awk 'BEGIN { print "Month Crates"
             print "-----  ------" }
           { print $1, "     ", $2 }' inventory-shipped
```

Lining up columns this way can get pretty complicated when there are many columns to fix. Counting spaces for two or three columns is simple, but any more than this can take up a lot of time. This is why the `printf` statement was created (see Section 4.5 [Using `printf` Statements for Fancier Printing], page 60); one of its specialties is lining up columns of data.

> **NOTE:** You can continue either a `print` or `printf` statement simply by putting a newline after any comma (see Section 1.6 [`awk` Statements Versus Lines], page 20).

4.3 Output Separators

As mentioned previously, a `print` statement contains a list of items separated by commas. In the output, the items are normally separated by single spaces. However, this doesn't need to be the case; a single space is only the default. Any string of characters may be used as the *output field separator* by setting the built-in variable `OFS`. The initial value of this variable is the string `" "`—that is, a single space.

The output from an entire `print` statement is called an *output record*. Each `print` statement outputs one output record, and then outputs a string called the *output record separator* (or `ORS`). The initial value of `ORS` is the string `"\n"`; i.e., a newline character. Thus, each `print` statement normally makes a separate line.

In order to change how output fields and records are separated, assign new values to the variables `OFS` and `ORS`. The usual place to do this is in the `BEGIN` rule (see Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96), so that it happens before any input is processed. It can also be done with assignments on the command line, before the names of the input files, or using the '`-v`' command-line option (see Section 11.2 [Command-Line Options], page 173). The following example prints the first and second fields of each input record, separated by a semicolon, with a blank line added after each newline:

```
$ awk 'BEGIN { OFS = ";"; ORS = "\n\n" }
>            { print $1, $2 }' BBS-list
⊣ aardvark;555-5553
⊣
⊣ alpo-net;555-3412
⊣
⊣ barfly;555-7685
...
```

If the value of `ORS` does not contain a newline, the program's output is run together on a single line.

4.4 Controlling Numeric Output with `print`

When the `print` statement is used to print numeric values, `awk` internally converts the number to a string of characters and prints that string. `awk` uses the `sprintf` function to do this conversion (see Section 8.1.3 [String-Manipulation Functions], page 129). For now, it suffices to say that the `sprintf` function accepts a *format specification* that tells it how to format numbers (or strings), and that there are a number of different ways in which numbers can be formatted. The different format specifications are discussed more fully in Section 4.5.2 [Format-Control Letters], page 60.

The built-in variable `OFMT` contains the default format specification that `print` uses with `sprintf` when it wants to convert a number to a string for printing. The default value of `OFMT` is `"%.6g"`. The way `print` prints numbers can be changed by supplying different format specifications as the value of `OFMT`, as shown in the following example:

```
$ awk 'BEGIN {
>   OFMT = "%.0f"  # print numbers as integers (rounds)
>   print 17.23, 17.54 }'
⊣ 17 18
```

According to the POSIX standard, `awk`'s behavior is undefined if `OFMT` contains anything but a floating-point conversion specification.



4.5 Using `printf` Statements for Fancier Printing

For more precise control over the output format than what is normally provided by `print`, use `printf`. `printf` can be used to specify the width to use for each item, as well as various formatting choices for numbers (such as what output base to use, whether to print an exponent, whether to print a sign, and how many digits to print after the decimal point). This is done by supplying a string, called the *format string*, that controls how and where to print the other arguments.

4.5.1 Introduction to the `printf` Statement

A simple `printf` statement looks like this:

```
printf format, item1, item2, ...
```

The entire list of arguments may optionally be enclosed in parentheses. The parentheses are necessary if any of the item expressions use the '`>`' relational operator; otherwise, it can be confused with a redirection (see Section 4.6 [Redirecting Output of `print` and `printf`], page 65).

The difference between `printf` and `print` is the *format* argument. This is an expression whose value is taken as a string; it specifies how to output each of the other arguments. It is called the *format string*.

The format string is very similar to that in the ISO C library function `printf`. Most of *format* is text to output verbatim. Scattered among this text are *format specifiers*—one per item. Each format specifier says to output the next item in the argument list at that place in the format.

The `printf` statement does not automatically append a newline to its output. It outputs only what the format string specifies. So if a newline is needed, you must include one in the format string. The output separator variables `OFS` and `ORS` have no effect on `printf` statements. For example:

```
$ awk 'BEGIN {
>     ORS = "\nOUCH!\n"; OFS = "+"
>     msg = "Dont Panic!"
>     printf "%s\n", msg
> }'
 ⊣ Dont Panic!
```

Here, neither the '`+`' nor the '`OUCH`' appear when the message is printed.

4.5.2 Format-Control Letters

A format specifier starts with the character '`%`' and ends with a *format-control letter*—it tells the `printf` statement how to output one item. The format-control letter specifies what *kind* of value to print. The rest of the format specifier is made up of optional *modifiers* that control *how* to print the value, such as the field width. Here is a list of the format-control letters:

`%c` This prints a number as an ASCII character; thus, '`printf "%c", 65`' outputs the letter '`A`'. (The output for a string value is the first character of the string.)

`%d`, `%i` These are equivalent; they both print a decimal integer. (The '`%i`' specification is for compatibility with ISO C.)

`%e`, `%E` These print a number in scientific (exponential) notation; for example:

```
printf "%4.3e\n", 1950
```

prints '`1.950e+03`', with a total of four significant figures, three of which follow the decimal point. (The '`4.3`' represents two modifiers, discussed in the next subsection.) '`%E`' uses '`E`' instead of '`e`' in the output.

`%f` This prints a number in floating-point notation. For example:

```
printf "%4.3f", 1950
```

prints '`1950.000`', with a total of four significant figures, three of which follow the decimal point. (The '`4.3`' represents two modifiers, discussed in the next subsection.)

On systems supporting IEEE 754 floating point format, values representing negative infinity are formatted as '`-inf`' or '`-infinity`', and positive infinity as '`inf`' and '`-infinity`'. The special "not a number" value formats as '`-nan`' or '`nan`'.

`%F` Like `%f` but the infinity and "not a number" values are spelled using uppercase letters.

The `%F` format is a POSIX extension to ISO C; not all systems support. On those that don't, `gawk` uses `%f` instead.

`%g`, `%G` These print a number in either scientific notation or in floating-point notation, whichever uses fewer characters; if the result is printed in scientific notation, '`%G`' uses '`E`' instead of '`e`'.

`%o` This prints an unsigned octal integer.

`%s` This prints a string.

`%u` This prints an unsigned decimal integer. (This format is of marginal use, because all numbers in `awk` are floating-point; it is provided primarily for compatibility with C.)

`%x`, `%X` These print an unsigned hexadecimal integer; '`%X`' uses the letters '`A`' through '`F`' instead of '`a`' through '`f`'.

`%%` This isn't a format-control letter, but it does have meaning—the sequence '`%%`' outputs one '`%`'; it does not consume an argument and it ignores any modifiers.

> **NOTE:** When using the integer format-control letters for values that are outside the range of the widest C integer type, `gawk` switches to the the '`%g`' format specifier. If '`--lint`' is provided on the command line (see Section 11.2 [Command-Line Options], page 173), `gawk` warns about this. Other versions of `awk` may print invalid values or do something else entirely.



4.5.3 Modifiers for `printf` Formats

A format specification can also include *modifiers* that can control how much of the item's value is printed, as well as how much space it gets. The modifiers come between the '`%`' and

the format-control letter. We will use the bullet symbol "•" in the following examples to represent spaces in the output. Here are the possible modifiers, in the order in which they may appear:

N`$` An integer constant followed by a '`$`' is a *positional specifier*. Normally, format specifications are applied to arguments in the order given in the format string. With a positional specifier, the format specification is applied to a specific argument, instead of what would be the next argument in the list. Positional specifiers begin counting with one. Thus:

```
printf "%s %s\n", "don't", "panic"
printf "%2$s %1$s\n", "panic", "don't"
```

prints the famous friendly message twice.

At first glance, this feature doesn't seem to be of much use. It is in fact a `gawk` extension, intended for use in translating messages at runtime. See Section 9.4.2 [Rearranging `printf` Arguments], page 160, which describes how and why to use positional specifiers. For now, we will not use them.

`-` The minus sign, used before the width modifier (see later on in this table), says to left-justify the argument within its specified width. Normally, the argument is printed right-justified in the specified width. Thus:

```
printf "%-4s", "foo"
```

prints '`foo`•'.

space For numeric conversions, prefix positive values with a space and negative values with a minus sign.

`+` The plus sign, used before the width modifier (see later on in this table), says to always supply a sign for numeric conversions, even if the data to format is positive. The '`+`' overrides the space modifier.

`#` Use an "alternate form" for certain control letters. For '`%o`', supply a leading zero. For '`%x`' and '`%X`', supply a leading '`0x`' or '`0X`' for a nonzero result. For '`%e`', '`%E`', and '`%f`', the result always contains a decimal point. For '`%g`' and '`%G`', trailing zeros are not removed from the result.

`0` A leading '`0`' (zero) acts as a flag that indicates that output should be padded with zeros instead of spaces. This applies even to non-numeric output formats.

This flag only has an effect when the field width is wider than the value to print.

`'` A single quote or apostrohe character is a POSIX extension to ISO C. It indicates that the integer part of a floating point value, or the entire part of an integer decimal value, should have a thousands-separator character in it. This only works in locales that support such characters. For example:

```
$ cat thousands.awk                                  Show source pro-
gram
⊣ BEGIN { printf "%'d\n", 1234567 }
$ LC_ALL=C gawk -f thousands.awk                     Run it in "C" lo-
cale
```

```
⊣ 1234567
$ LC_ALL=en_US.UTF-8 gawk -f thousands.awk          Run in US En-
glish UTF locale
⊣ 1,234,567
```

For more information about locales and internationalization issues, **FIXME: see xxxx**.

> **NOTE:** The ‘’’ flag is a nice feature, but its use complicates things: it now becomes difficult to use it in command-line programs. For information on appropriate quoting tricks, **FIXME: see XXXX**.

width This is a number specifying the desired minimum width of a field. Inserting any number between the ‘%’ sign and the format-control character forces the field to expand to this width. The default way to do this is to pad with spaces on the left. For example:

```
printf "%4s", "foo"
```

prints ‘•foo’.

The value of *width* is a minimum width, not a maximum. If the item value requires more than *width* characters, it can be as wide as necessary. Thus, the following:

```
printf "%4s", "foobar"
```

prints ‘foobar’.

Preceding the *width* with a minus sign causes the output to be padded with spaces on the right, instead of on the left.

.prec A period followed by an integer constant specifies the precision to use when printing. The meaning of the precision varies by control letter:

`%e`, `%E`, `%f` Number of digits to the right of the decimal point.

`%g`, `%G` Maximum number of significant digits.

`%d`, `%i`, `%o`, `%u`, `%x`, `%X`
Minimum number of digits to print.

`%s` Maximum number of characters from the string that should print.

Thus, the following:

```
printf "%.4s", "foobar"
```

prints ‘foob’.

The C library `printf`’s dynamic *width* and *prec* capability (for example, `"%*.*s"`) is supported. Instead of supplying explicit *width* and/or *prec* values in the format string, they are passed in the argument list. For example:

```
w = 5
p = 3
s = "abcdefg"
printf "%*.*s\n", w, p, s
```

is exactly equivalent to:

```
s = "abcdefg"
printf "%5.3s\n", s
```

Both programs output '••abc'. Earlier versions of `awk` did not support this capability. If you must use such a version, you may simulate this feature by using concatenation to build up the format string, like so:

```
w = 5
p = 3
s = "abcdefg"
printf "%" w "." p "s\n", s
```

This is not particularly easy to read but it does work.

C programmers may be used to supplying additional '`l`', '`L`', and '`h`' modifiers in `printf` format strings. These are not valid in `awk`. Most `awk` implementations silently ignore these modifiers. If '`--lint`' is provided on the command line (see Section 11.2 [Command-Line Options], page 173), `gawk` warns about their use. If '`--posix`' is supplied, their use is a fatal error.

4.5.4 Examples Using `printf`

The following is a simple example of how to use `printf` to make an aligned table:

```
awk '{ printf "%-10s %s\n", $1, $2 }' BBS-list
```

This command prints the names of the bulletin boards (`$1`) in the file '`BBS-list`' as a string of 10 characters that are left-justified. It also prints the phone numbers (`$2`) next on the line. This produces an aligned two-column table of names and phone numbers, as shown here:

```
$ awk '{ printf "%-10s %s\n", $1, $2 }' BBS-list
⊣ aardvark   555-5553
⊣ alpo-net   555-3412
⊣ barfly     555-7685
⊣ bites      555-1675
⊣ camelot    555-0542
⊣ core       555-2912
⊣ fooey      555-1234
⊣ foot       555-6699
⊣ macfoo     555-6480
⊣ sdace      555-3430
⊣ sabafoo    555-2127
```

In this case, the phone numbers had to be printed as strings because the numbers are separated by a dash. Printing the phone numbers as numbers would have produced just the first three digits: '`555`'. This would have been pretty confusing.

It wasn't necessary to specify a width for the phone numbers because they are last on their lines. They don't need to have spaces after them.

The table could be made to look even nicer by adding headings to the tops of the columns. This is done using the `BEGIN` pattern (see Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96) so that the headers are only printed once, at the beginning of the `awk` program:

```
awk 'BEGIN { print "Name      Number"
             print "----      ------" }
     { printf "%-10s %s\n", $1, $2 }' BBS-list
```

The above example mixed `print` and `printf` statements in the same program. Using just `printf` statements can produce the same results:

```
awk 'BEGIN { printf "%-10s %s\n", "Name", "Number"
             printf "%-10s %s\n", "----", "------" }
     { printf "%-10s %s\n", $1, $2 }' BBS-list
```

Printing each column heading with the same format specification used for the column elements ensures that the headings are aligned just like the columns.

The fact that the same format specification is used three times can be emphasized by storing it in a variable, like this:

```
awk 'BEGIN { format = "%-10s %s\n"
             printf format, "Name", "Number"
             printf format, "----", "------" }
     { printf format, $1, $2 }' BBS-list
```

At this point, it would be a worthwhile exercise to use the `printf` statement to line up the headings and table data for the '`inventory-shipped`' example that was covered earlier in the section on the `print` statement (see Section 4.1 [The `print` Statement], page 57).

4.6 Redirecting Output of `print` and `printf`

So far, the output from `print` and `printf` has gone to the standard output, usually the terminal. Both `print` and `printf` can also send their output to other places. This is called *redirection*.

A redirection appears after the `print` or `printf` statement. Redirections in `awk` are written just like redirections in shell commands, except that they are written inside the `awk` program.

There are four forms of output redirection: output to a file, output appended to a file, output through a pipe to another command, and output to a coprocess. They are all shown for the `print` statement, but they work identically for `printf`:

`print` *items* `>` *output-file*

This type of redirection prints the items into the output file named *output-file*. The file name *output-file* can be any expression. Its value is changed to a string and then used as a file name (see Chapter 5 [Expressions], page 73).

When this type of redirection is used, the *output-file* is erased before the first output is written to it. Subsequent writes to the same *output-file* do not erase *output-file*, but append to it. (This is different from how you use redirections in shell scripts.) If *output-file* does not exist, it is created. For example, here is how an `awk` program can write a list of BBS names to one file named '`name-list`', and a list of phone numbers to another file named '`phone-list`':

```
$ awk '{ print $2 > "phone-list"
>        print $1 > "name-list" }' BBS-list
$ cat phone-list
⊣ 555-5553
```

```
⊣ 555-3412
...
$ cat name-list
⊣ aardvark
⊣ alpo-net
...
```

Each output file contains one name or number per line.

`print` *items* `>>` *output-file*
: This type of redirection prints the items into the pre-existing output file named *output-file*. The difference between this and the single-'`>`' redirection is that the old contents (if any) of *output-file* are not erased. Instead, the `awk` output is appended to the file. If *output-file* does not exist, then it is created.

`print` *items* `|` *command*
: It is also possible to send output to another program through a pipe instead of into a file. This type of redirection opens a pipe to *command*, and writes the values of *items* through this pipe to another process created to execute *command*.

  The redirection argument *command* is actually an `awk` expression. Its value is converted to a string whose contents give the shell command to be run. For example, the following produces two files, one unsorted list of BBS names, and one list sorted in reverse alphabetical order:

```
awk '{ print $1 > "names.unsorted"
       command = "sort -r > names.sorted"
       print $1 | command }' BBS-list
```

  The unsorted list is written with an ordinary redirection, while the sorted list is written by piping through the `sort` utility.

  The next example uses redirection to mail a message to the mailing list '`bug-system`'. This might be useful when trouble is encountered in an `awk` script run periodically for system maintenance:

```
report = "mail bug-system"
print "Awk script failed:", $0 | report
m = ("at record number " FNR " of " FILENAME)
print m | report
close(report)
```

  The message is built using string concatenation and saved in the variable `m`. It's then sent down the pipeline to the `mail` program. (The parentheses group the items to concatenate—see Section 5.6 [String Concatenation], page 80.)

  The `close` function is called here because it's a good idea to close the pipe as soon as all the intended output has been sent to it. See Section 4.8 [Closing Input and Output Redirections], page 70, for more information.

  This example also illustrates the use of a variable to represent a *file* or *command*—it is not necessary to always use a string constant. Using a variable is generally a good idea, because `awk` requires that the string value be spelled identically every time.

`print` *items* `|&` *command*

This type of redirection prints the items to the input of *command*. The difference between this and the single-'`|`' redirection is that the output from *command* can be read with `getline`. Thus *command* is a *coprocess*, which works together with, but subsidiary to, the `awk` program.

This feature is a `gawk` extension, and is not available in POSIX `awk`. See Section 10.2 [Two-Way Communications with Another Process], page 166, for a more complete discussion.

Redirecting output using '`>`', '`>>`', '`|`', or '`|&`' asks the system to open a file, pipe, or coprocess only if the particular *file* or *command* you specify has not already been written to by your program or if it has been closed since it was last written to.

It is a common error to use '`>`' redirection for the first `print` to a file, and then to use '`>>`' for subsequent output:

```
# clear the file
print "Don't panic" > "guide.txt"
...
# append
print "Avoid improbability generators" >> "guide.txt"
```

This is indeed how redirections must be used from the shell. But in `awk`, it isn't necessary. In this kind of case, a program should use '`>`' for all the `print` statements, since the output file is only opened once.

As mentioned earlier (see Section 3.8.9 [Points to Remember About `getline`], page 56), many `awk` implementations limit the number of pipelines that an `awk` program may have open to just one! In `gawk`, there is no such limit. `gawk` allows a program to open as many pipelines as the underlying operating system permits.

Advanced Notes: Piping into `sh`

A particularly powerful way to use redirection is to build command lines and pipe them into the shell, `sh`. For example, suppose you have a list of files brought over from a system where all the file names are stored in uppercase, and you wish to rename them to have names in all lowercase. The following program is both simple and efficient:

```
{ printf("mv %s %s\n", $0, tolower($0)) | "sh" }

END { close("sh") }
```

The `tolower` function returns its argument string with all uppercase characters converted to lowercase (see Section 8.1.3 [String-Manipulation Functions], page 129). The program builds up a list of command lines, using the `mv` utility to rename the files. It then sends the list to the shell for execution.

4.7 Special File Names in `gawk`

`gawk` provides a number of special file names that it interprets internally. These file names provide access to standard file descriptors, process-related information, and TCP/IP networking.

4.7.1 Special Files for Standard Descriptors

Running programs conventionally have three input and output streams already available to them for reading and writing. These are known as the *standard input*, *standard output*, and *standard error output*. These streams are, by default, connected to your terminal, but they are often redirected with the shell, via the '`<`', '`<<`', '`>`', '`>>`', '`>&`', and '`|`' operators. Standard error is typically used for writing error messages; the reason there are two separate streams, standard output and standard error, is so that they can be redirected separately.

In other implementations of `awk`, the only way to write an error message to standard error in an `awk` program is as follows:

```
print "Serious error detected!" | "cat 1>&2"
```

This works by opening a pipeline to a shell command that can access the standard error stream that it inherits from the `awk` process. This is far from elegant, and it is also inefficient, because it requires a separate process. So people writing `awk` programs often don't do this. Instead, they send the error messages to the terminal, like this:

```
print "Serious error detected!" > "/dev/tty"
```

This usually has the same effect but not always: although the standard error stream is usually the terminal, it can be redirected; when that happens, writing to the terminal is not correct. In fact, if `awk` is run from a background job, it may not have a terminal at all. Then opening '`/dev/tty`' fails.

`gawk` provides special file names for accessing the three standard streams, as well as any other inherited open files. If the file name matches one of these special names when `gawk` redirects input or output, then it directly uses the stream that the file name stands for. These special file names work for all operating systems that `gawk` has been ported to, not just those that are POSIX-compliant:

'`/dev/stdin`'
: The standard input (file descriptor 0).

'`/dev/stdout`'
: The standard output (file descriptor 1).

'`/dev/stderr`'
: The standard error output (file descriptor 2).

'`/dev/fd/`*N*'
: The file associated with file descriptor *N*. Such a file must be opened by the program initiating the `awk` execution (typically the shell). Unless special pains are taken in the shell from which `gawk` is invoked, only descriptors 0, 1, and 2 are available.

The file names '`/dev/stdin`', '`/dev/stdout`', and '`/dev/stderr`' are aliases for '`/dev/fd/0`', '`/dev/fd/1`', and '`/dev/fd/2`', respectively. However, they are more self-explanatory. The proper way to write an error message in a `gawk` program is to use '`/dev/stderr`', like this:

```
print "Serious error detected!" > "/dev/stderr"
```

Note the use of quotes around the file name. Like any other redirection, the value must be a string. It is a common error to omit the quotes, which leads to confusing results.

4.7.2 Special Files for Process-Related Information

`gawk` also provides special file names that give access to information about the running `gawk` process. Each of these "files" provides a single record of information. To read them more than once, they must first be closed with the `close` function (see Section 4.8 [Closing Input and Output Redirections], page 70). The file names are:

'`/dev/pid`'
: Reading this file returns the process ID of the current process, in decimal form, terminated with a newline.

'`/dev/ppid`'
: Reading this file returns the parent process ID of the current process, in decimal form, terminated with a newline.

'`/dev/pgrpid`'
: Reading this file returns the process group ID of the current process, in decimal form, terminated with a newline.

'`/dev/user`'
: Reading this file returns a single record terminated with a newline. The fields are separated with spaces. The fields represent the following information:

  `$1` The return value of the `getuid` system call (the real user ID number).

  `$2` The return value of the `geteuid` system call (the effective user ID number).

  `$3` The return value of the `getgid` system call (the real group ID number).

  `$4` The return value of the `getegid` system call (the effective group ID number).

  If there are any additional fields, they are the group IDs returned by the `getgroups` system call. (Multiple groups may not be supported on all systems.)

These special file names may be used on the command line as data files, as well as for I/O redirections within an `awk` program. They may not be used as source files with the '`-f`' option.

> **NOTE:** The special files that provide process-related information are now considered obsolete and will disappear entirely in the next release of `gawk`. `gawk` prints a warning message every time you use one of these files. To obtain process-related information, use the `PROCINFO` array. See Section 6.5.2 [Built-in Variables That Convey Information], page 110.

4.7.3 Special Files for Network Communications

Starting with version 3.1 of `gawk`, `awk` programs can open a two-way TCP/IP connection, acting as either a client or a server. This is done using a special file name of the form:

'`/inet/`*`protocol`*`/`*`local-port`*`/`*`remote-host`*`/`*`remote-port`*'

The *protocol* is one of '`tcp`', '`udp`', or '`raw`', and the other fields represent the other essential pieces of information for making a networking connection. These file names are used with the '`|&`' operator for communicating with a coprocess (see Section 10.2 [Two-Way Communications with Another Process], page 166). This is an advanced feature, mentioned here only for completeness. Full discussion is delayed until Section 10.3 [Using `gawk` for Network Programming], page 168.

4.7.4 Special File Name Caveats

Here is a list of things to bear in mind when using the special file names that `gawk` provides:

- Recognition of these special file names is disabled if `gawk` is in compatibility mode (see Section 11.2 [Command-Line Options], page 173).
- As mentioned earlier, the special files that provide process-related information are now considered obsolete and will disappear entirely in the next release of `gawk`. `gawk` prints a warning message every time you use one of these files.
- Starting with version 3.1, `gawk` *always* interprets these special file names.[1] For example, using '`/dev/fd/4`' for output actually writes on file descriptor 4, and not on a new file descriptor that is `dup`'ed from file descriptor 4. Most of the time this does not matter; however, it is important to *not* close any of the files related to file descriptors 0, 1, and 2. Doing so results in unpredictable behavior.

4.8 Closing Input and Output Redirections

If the same file name or the same shell command is used with `getline` more than once during the execution of an `awk` program (see Section 3.8 [Explicit Input with `getline`], page 51), the file is opened (or the command is executed) the first time only. At that time, the first record of input is read from that file or command. The next time the same file or command is used with `getline`, another record is read from it, and so on.

Similarly, when a file or pipe is opened for output, the file name or command associated with it is remembered by `awk`, and subsequent writes to the same file or command are appended to the previous writes. The file or pipe stays open until `awk` exits.

This implies that special steps are necessary in order to read the same file again from the beginning, or to rerun a shell command (rather than reading more output from the same command). The `close` function makes these things possible:

```
close(filename)
```

or:

```
close(command)
```

The argument *filename* or *command* can be any expression. Its value must *exactly* match the string that was used to open the file or start the command (spaces and other "irrelevant" characters included). For example, if you open a pipe with this:

```
"sort -r names" | getline foo
```

then you must close it with this:

[1] Older versions of `gawk` would interpret these names internally only if the system did not actually have a '`/dev/fd`' directory or any of the other special files listed earlier. Usually this didn't make a difference, but sometimes it did; thus, it was decided to make `gawk`'s behavior consistent on all systems and to have it always interpret the special file names itself.

```
close("sort -r names")
```

Once this function call is executed, the next `getline` from that file or command, or the next `print` or `printf` to that file or command, reopens the file or reruns the command. Because the expression that you use to close a file or pipeline must exactly match the expression used to open the file or run the command, it is good practice to use a variable to store the file name or command. The previous example becomes the following:

```
sortcom = "sort -r names"
sortcom | getline foo
...
close(sortcom)
```

This helps avoid hard-to-find typographical errors in your `awk` programs. Here are some of the reasons for closing an output file:

- To write a file and read it back later on in the same `awk` program. Close the file after writing it, then begin reading it with `getline`.
- To write numerous files, successively, in the same `awk` program. If the files aren't closed, eventually `awk` may exceed a system limit on the number of open files in one process. It is best to close each one when the program has finished writing it.
- To make a command finish. When output is redirected through a pipe, the command reading the pipe normally continues to try to read input as long as the pipe is open. Often this means the command cannot really do its work until the pipe is closed. For example, if output is redirected to the `mail` program, the message is not actually sent until the pipe is closed.
- To run the same program a second time, with the same arguments. This is not the same thing as giving more input to the first run!

  For example, suppose a program pipes output to the `mail` program. If it outputs several lines redirected to this pipe without closing it, they make a single message of several lines. By contrast, if the program closes the pipe after each line of output, then each line makes a separate message.

If you use more files than the system allows you to have open, `gawk` attempts to multiplex the available open files among your data files. `gawk`'s ability to do this depends upon the facilities of your operating system, so it may not always work. It is therefore both good practice and good portability advice to always use `close` on your files when you are done with them. In fact, if you are using a lot of pipes, it is essential that you close commands when done. For example, consider something like this:

```
{
    ...
    command = ("grep " $1 " /some/file | my_prog -q " $3)
    while ((command | getline) > 0) {
        process output of command
    }
    # need close(command) here
}
```

This example creates a new pipeline based on data in *each* record. Without the call to `close` indicated in the comment, `awk` creates child processes to run the commands, until it eventually runs out of file descriptors for more pipelines.

Even though each command has finished (as indicated by the end-of-file return status from `getline`), the child process is not terminated;[2] more importantly, the file descriptor for the pipe is not closed and released until `close` is called or `awk` exits.

`close` will silently do nothing if given an argument that does not represent a file, pipe or coprocess that was opened with a redirection.

Note also that '`close(FILENAME)`' has no "magic" effects on the implicit loop that reads through the files named on the command line. It is, more likely, a close of a file that was never opened, so `awk` silently does nothing.

When using the '`|&`' operator to communicate with a coprocess, it is occasionally useful to be able to close one end of the two-way pipe without closing the other. This is done by supplying a second argument to `close`. As in any other call to `close`, the first argument is the name of the command or special file used to start the coprocess. The second argument should be a string, with either of the values `"to"` or `"from"`. Case does not matter. As this is an advanced feature, a more complete discussion is delayed until Section 10.2 [Two-Way Communications with Another Process], page 166, which discusses it in more detail and gives an example.

Advanced Notes: Using `close`'s Return Value

In many versions of Unix `awk`, the `close` function is actually a statement. It is a syntax error to try and use the return value from `close`:

```
command = "..."
command | getline info
retval = close(command)  # syntax error in most Unix awks
```

`gawk` treats `close` as a function. The return value is -1 if the argument names something that was never opened with a redirection, or if there is a system problem closing the file or process. In these cases, `gawk` sets the built-in variable `ERRNO` to a string describing the problem.

In `gawk`, when closing a pipe or coprocess, the return value is the exit status of the command.[3] Otherwise, it is the return value from the system's `close` or `fclose` C functions when closing input or output files, respectively. This value is zero if the close succeeds, or -1 if it fails.

The POSIX standard is very vague; it says that `close` returns zero on success and non-zero otherwise. In general, different implementations vary in what they report when closing pipes; thus the return value cannot be used portably.

[2] The technical terminology is rather morbid. The finished child is called a "zombie," and cleaning up after it is referred to as "reaping."

[3] This is a full 16-bit value as returned by the `wait` system call. See the system manual pages for information on how to decode this value.

5 Expressions

Expressions are the basic building blocks of `awk` patterns and actions. An expression evaluates to a value that you can print, test, or pass to a function. Additionally, an expression can assign a new value to a variable or a field by using an assignment operator.

An expression can serve as a pattern or action statement on its own. Most other kinds of statements contain one or more expressions that specify the data on which to operate. As in other languages, expressions in `awk` include variables, array references, constants, and function calls, as well as combinations of these with various operators.

5.1 Constant Expressions

The simplest type of expression is the *constant*, which always has the same value. There are three types of constants: numeric, string, and regular expression.

Each is used in the appropriate context when you need a data value that isn't going to change. Numeric constants can have different forms, but are stored identically internally.

5.1.1 Numeric and String Constants

A *numeric constant* stands for a number. This number can be an integer, a decimal fraction, or a number in scientific (exponential) notation.[1] Here are some examples of numeric constants that all have the same value:

```
105
1.05e+2
1050e-1
```

A string constant consists of a sequence of characters enclosed in double-quotation marks. For example:

```
"parrot"
```

represents the string whose contents are '`parrot`'. Strings in `gawk` can be of any length, and they can contain any of the possible eight-bit ASCII characters including ASCII NUL (character code zero). Other `awk` implementations may have difficulty with some character codes.

5.1.2 Octal and Hexadecimal Numbers

In `awk`, all numbers are in decimal; i.e., base 10. Many other programming languages allow you to specify numbers in other bases, often octal (base 8) and hexadecimal (base 16). In octal, the numbers go 0, 1, 2, 3, 4, 5, 6, 7, 10, 11, 12, etc. Just as '`11`', in decimal, is 1 times 10 plus 1, so '`11`', in octal, is 1 times 8, plus 1. This equals 9 in decimal. In hexadecimal, there are 16 digits. Since the everyday decimal number system only has ten digits ('`0`'–'`9`'), the letters '`a`' through '`f`' are used to represent the rest. (Case in the letters is usually irrelevant; hexadecimal '`a`' and '`A`' have the same value.) Thus, '`11`', in hexadecimal, is 1 times 16 plus 1, which equals 17 in decimal.

Just by looking at plain '`11`', you can't tell what base it's in. So, in C, C++, and other languages derived from C, there is a special notation to help signify the base. Octal numbers start with a leading '`0`', and hexadecimal numbers start with a leading '`0x`' or '`0X`':

[1] The internal representation of all numbers, including integers, uses double-precision floating-point numbers. On most modern systems, these are in IEEE 754 standard format.

`11` Decimal value 11.

`011` Octal 11, decimal value 9.

`0x11` Hexadecimal 11, decimal value 17.

This example shows the difference:

```
$ gawk 'BEGIN { printf "%d, %d, %d\n", 011, 11, 0x11 }'
⊣ 9, 11, 17
```

Being able to use octal and hexadecimal constants in your programs is most useful when working with data that cannot be represented conveniently as characters or as regular numbers, such as binary data of various sorts.

`gawk` allows the use of octal and hexadecimal constants in your program text. However, such numbers in the input data are not treated differently; doing so by default would break old programs. (If you really need to do this, use the '`--non-decimal-data`' command-line option; see Section 10.1 [Allowing Nondecimal Input Data], page 165.) If you have octal or hexadecimal data, you can use the `strtonum` function (see Section 8.1.3 [String-Manipulation Functions], page 129) to convert the data into a number. Most of the time, you will want to use octal or hexadecimal constants when working with the built-in bit manipulation functions; see Section 8.1.6 [Bit-Manipulation Functions of `gawk`], page 147, for more information.

Unlike some early C implementations, '`8`' and '`9`' are not valid in octal constants; e.g., `gawk` treats '`018`' as decimal 18:

```
$ gawk 'BEGIN { print "021 is", 021 ; print 018 }'
⊣ 021 is 17
⊣ 18
```

Octal and hexadecimal source code constants are a `gawk` extension. If `gawk` is in compatibility mode (see Section 11.2 [Command-Line Options], page 173), they are not available.

Advanced Notes: A Constant's Base Does Not Affect Its Value

Once a numeric constant has been converted internally into a number, `gawk` no longer remembers what the original form of the constant was; the internal value is always used. This has particular consequences for conversion of numbers to strings:

```
$ gawk 'BEGIN { printf "0x11 is <%s>\n", 0x11 }'
⊣ 0x11 is <17>
```

5.1.3 Regular Expression Constants

A regexp constant is a regular expression description enclosed in slashes, such as `/^beginning and end$/`. Most regexps used in `awk` programs are constant, but the '`~`' and '`!~`' matching operators can also match computed or "dynamic" regexps (which are just ordinary strings or variables that contain a regexp).

5.2 Using Regular Expression Constants

When used on the righthand side of the '`~`' or '`!~`' operators, a regexp constant merely stands for the regexp that is to be matched. However, regexp constants (such as `/foo/`) may be used like simple expressions. When a regexp constant appears by itself, it has

the same meaning as if it appeared in a pattern, i.e., '`($0 ~ /foo/)`' See Section 6.1.2 [Expressions as Patterns], page 93. This means that the following two code segments:

```
if ($0 ~ /barfly/ || $0 ~ /camelot/)
    print "found"
```

and:

```
if (/barfly/ || /camelot/)
    print "found"
```

are exactly equivalent. One rather bizarre consequence of this rule is that the following Boolean expression is valid, but does not do what the user probably intended:

```
# note that /foo/ is on the left of the ~
if (/foo/ ~ $1) print "found foo"
```

This code is "obviously" testing `$1` for a match against the regexp `/foo/`. But in fact, the expression '`/foo/ ~ $1`' actually means '`($0 ~ /foo/) ~ $1`'. In other words, first match the input record against the regexp `/foo/`. The result is either zero or one, depending upon the success or failure of the match. That result is then matched against the first field in the record. Because it is unlikely that you would ever really want to make this kind of test, `gawk` issues a warning when it sees this construct in a program. Another consequence of this rule is that the assignment statement:

```
matches = /foo/
```

assigns either zero or one to the variable `matches`, depending upon the contents of the current input record. This feature of the language has never been well documented until the POSIX specification.

Constant regular expressions are also used as the first argument for the `gensub`, `sub`, and `gsub` functions, and as the second argument of the `match` function (see Section 8.1.3 [String-Manipulation Functions], page 129). Modern implementations of `awk`, including `gawk`, allow the third argument of `split` to be a regexp constant, but some older implementations do not. This can lead to confusion when attempting to use regexp constants as arguments to user-defined functions (see Section 8.2 [User-Defined Functions], page 149). For example:

```
function mysub(pat, repl, str, global)
{
    if (global)
        gsub(pat, repl, str)
    else
        sub(pat, repl, str)
    return str
}

{
    ...
    text = "hi! hi yourself!"
    mysub(/hi/, "howdy", text, 1)
    ...
}
```

In this example, the programmer wants to pass a regexp constant to the user-defined function `mysub`, which in turn passes it on to either `sub` or `gsub`. However, what really

happens is that the `pat` parameter is either one or zero, depending upon whether or not `$0` matches `/hi/`. `gawk` issues a warning when it sees a regexp constant used as a parameter to a user-defined function, since passing a truth value in this way is probably not what was intended.

5.3 Variables

Variables are ways of storing values at one point in your program for use later in another part of your program. They can be manipulated entirely within the program text, and they can also be assigned values on the `awk` command line.

5.3.1 Using Variables in a Program

Variables let you give names to values and refer to them later. Variables have already been used in many of the examples. The name of a variable must be a sequence of letters, digits, or underscores, and it may not begin with a digit. Case is significant in variable names; `a` and `A` are distinct variables.

A variable name is a valid expression by itself; it represents the variable's current value. Variables are given new values with *assignment operators*, *increment operators*, and *decrement operators*. See Section 5.7 [Assignment Expressions], page 81.

A few variables have special built-in meanings, such as `FS` (the field separator), and `NF` (the number of fields in the current input record). See Section 6.5 [Built-in Variables], page 107, for a list of the built-in variables. These built-in variables can be used and assigned just like all other variables, but their values are also used or changed automatically by `awk`. All built-in variables' names are entirely uppercase.

Variables in `awk` can be assigned either numeric or string values. The kind of value a variable holds can change over the life of a program. By default, variables are initialized to the empty string, which is zero if converted to a number. There is no need to "initialize" each variable explicitly in `awk`, which is what you would do in C and in most other traditional languages.

5.3.2 Assigning Variables on the Command Line

Any `awk` variable can be set by including a *variable assignment* among the arguments on the command line when `awk` is invoked (see Section 11.3 [Other Command-Line Arguments], page 178). Such an assignment has the following form:

```
variable=text
```

With it, a variable is set either at the beginning of the `awk` run or in between input files. When the assignment is preceded with the '`-v`' option, as in the following:

```
-v variable=text
```

the variable is set at the very beginning, even before the `BEGIN` rules are run. The '`-v`' option and its assignment must precede all the file name arguments, as well as the program text. (See Section 11.2 [Command-Line Options], page 173, for more information about the '`-v`' option.) Otherwise, the variable assignment is performed at a time determined by its position among the input file arguments—after the processing of the preceding input file argument. For example:

```
awk '{ print $n }' n=4 inventory-shipped n=2 BBS-list
```

prints the value of field number `n` for all input records. Before the first file is read, the command line sets the variable `n` equal to four. This causes the fourth field to be printed in lines from the file '`inventory-shipped`'. After the first file has finished, but before the second file is started, `n` is set to two, so that the second field is printed in lines from '`BBS-list`':

```
$ awk '{ print $n }' n=4 inventory-shipped n=2 BBS-list
⊣ 15
⊣ 24
...
⊣ 555-5553
⊣ 555-3412
...
```

Command-line arguments are made available for explicit examination by the `awk` program in the `ARGV` array (see Section 6.5.3 [Using `ARGC` and `ARGV`], page 113). `awk` processes the values of command-line assignments for escape sequences (see Section 2.2 [Escape Sequences], page 25).

5.4 Conversion of Strings and Numbers

Strings are converted to numbers and numbers are converted to strings, if the context of the `awk` program demands it. For example, if the value of either `foo` or `bar` in the expression '`foo + bar`' happens to be a string, it is converted to a number before the addition is performed. If numeric values appear in string concatenation, they are converted to strings. Consider the following:

```
two = 2; three = 3
print (two three) + 4
```

This prints the (numeric) value 27. The numeric values of the variables `two` and `three` are converted to strings and concatenated together. The resulting string is converted back to the number 23, to which 4 is then added.

If, for some reason, you need to force a number to be converted to a string, concatenate the empty string, `""`, with that number. To force a string to be converted to a number, add zero to that string. A string is converted to a number by interpreting any numeric prefix of the string as numerals: `"2.5"` converts to 2.5, `"1e3"` converts to 1000, and `"25fix"` has a numeric value of 25. Strings that can't be interpreted as valid numbers convert to zero.

The exact manner in which numbers are converted into strings is controlled by the `awk` built-in variable `CONVFMT` (see Section 6.5 [Built-in Variables], page 107). Numbers are converted using the `sprintf` function with `CONVFMT` as the format specifier (see Section 8.1.3 [String-Manipulation Functions], page 129).

`CONVFMT`'s default value is `"%.6g"`, which prints a value with at least six significant digits. For some applications, you might want to change it to specify more precision. On most modern machines, 17 digits is enough to capture a floating-point number's value exactly, most of the time.[2]

Strange results can occur if you set `CONVFMT` to a string that doesn't tell `sprintf` how to format floating-point numbers in a useful way. For example, if you forget the '`%`' in the

[2] Pathological cases can require up to 752 digits (!), but we doubt that you need to worry about this.

format, `awk` converts all numbers to the same constant string. As a special case, if a number is an integer, then the result of converting it to a string is *always* an integer, no matter what the value of `CONVFMT` may be. Given the following code fragment:

```
CONVFMT = "%2.2f"
a = 12
b = a ""
```


`b` has the value `"12"`, not `"12.00"`.

Prior to the POSIX standard, `awk` used the value of `OFMT` for converting numbers to strings. `OFMT` specifies the output format to use when printing numbers with `print`. `CONVFMT` was introduced in order to separate the semantics of conversion from the semantics of printing. Both `CONVFMT` and `OFMT` have the same default value: `"%.6g"`. In the vast majority of cases, old `awk` programs do not change their behavior. However, these semantics for `OFMT` are something to keep in mind if you must port your new style program to older implementations of `awk`. We recommend that instead of changing your programs, just port `gawk` itself. See Section 4.1 [The `print` Statement], page 57, for more information on the `print` statement.

Finally, once again, where you are can matter when it comes to converting between numbers and strings. In Section 2.9 [Where You Are Makes A Difference], page 35, we mentioned that the local character set and language (the locale) can affect how `gawk` matches characters. The locale also affects numeric formats. In particular, for `awk` programs, it affects the decimal point character. The `"C"` locale, and most English-language locales, use the period character (‘`.`’) as the decimal point. However, many (if not most) European and non-English locales use the comma (‘`,`’) as the decimal point character.

The POSIX standard says that `awk` always uses the period as the decimal point when reading the `awk` program source code, and for command-line variable assignments (see Section 11.3 [Other Command-Line Arguments], page 178). However, when interpreting input data, for `print` and `printf` output, and for number to string conversion, the local decimal point character is used. As of version 3.1.3, `gawk` fully complies with this aspect of the standard. Here are some examples indicating the difference in behavior, on a GNU/Linux system:

```
$ gawk 'BEGIN { printf "%g\n", 3.1415927 }'
⊣ 3.14159
$  LC_ALL=en_DK gawk 'BEGIN { printf "%g\n", 3.1415927 }'
⊣ 3,14159
$ echo 4,321 | gawk '{ print $1 + 1 }'
⊣ 5
$ echo 4,321 | LC_ALL=en_DK gawk '{ print $1 + 1 }'
⊣ 5,321
```

The ‘`en_DK`’ locale is for English in Denmark, where the comma acts as the decimal point separator. In the normal `"C"` locale, `gawk` treats ‘`4,321`’ as ‘`4`’, while in the Danish locale, it's treated as the full number, ‘`4.321`’.

5.5 Arithmetic Operators

The `awk` language uses the common arithmetic operators when evaluating expressions. All of these arithmetic operators follow normal precedence rules and work as you would expect them to.

The following example uses a file named '`grades`', which contains a list of student names as well as three test scores per student (it's a small class):

```
Pat   100 97 58
Sandy  84 72 93
Chris  72 92 89
```

This programs takes the file '`grades`' and prints the average of the scores:

```
$ awk '{ sum = $2 + $3 + $4 ; avg = sum / 3
>        print $1, avg }' grades
⊣ Pat 85
⊣ Sandy 83
⊣ Chris 84.3333
```

The following list provides the arithmetic operators in `awk`, in order from the highest precedence to the lowest:

`- x` Negation.

`+ x` Unary plus; the expression is converted to a number.

`x ^ y`
`x ** y` Exponentiation; *x* raised to the *y* power. '`2 ^ 3`' has the value eight; the character sequence '`**`' is equivalent to '`^`'.

`x * y` Multiplication.

`x / y` Division; because all numbers in `awk` are floating-point numbers, the result is *not* rounded to an integer—'`3 / 4`' has the value 0.75. (It is a common mistake, especially for C programmers, to forget that *all* numbers in `awk` are floating-point, and that division of integer-looking constants produces a real number, not an integer.)

`x % y` Remainder; further discussion is provided in the text, just after this list.

`x + y` Addition.

`x - y` Subtraction.

Unary plus and minus have the same precedence, the multiplication operators all have the same precedence, and addition and subtraction have the same precedence.

When computing the remainder of `x % y`, the quotient is rounded toward zero to an integer and multiplied by *y*. This result is subtracted from *x*; this operation is sometimes known as "trunc-mod." The following relation always holds:

```
b * int(a / b) + (a % b) == a
```

One possibly undesirable effect of this definition of remainder is that `x % y` is negative if *x* is negative. Thus:

```
-17 % 8 = -1
```

In other `awk` implementations, the signedness of the remainder may be machine-dependent.

NOTE: The POSIX standard only specifies the use of '`^`' for exponentiation. For maximum portability, do not use the '`**`' operator.

5.6 String Concatenation

It seemed like a good idea at the time.
Brian Kernighan

There is only one string operation: concatenation. It does not have a specific operator to represent it. Instead, concatenation is performed by writing expressions next to one another, with no operator. For example:

```
$ awk '{ print "Field number one: " $1 }' BBS-list
⊣ Field number one: aardvark
⊣ Field number one: alpo-net
...
```

Without the space in the string constant after the '`:`', the line runs together. For example:

```
$ awk '{ print "Field number one:" $1 }' BBS-list
⊣ Field number one:aardvark
⊣ Field number one:alpo-net
...
```

Because string concatenation does not have an explicit operator, it is often necessary to insure that it happens at the right time by using parentheses to enclose the items to concatenate. For example, the following code fragment does not concatenate `file` and `name` as you might expect:

```
file = "file"
name = "name"
print "something meaningful" > file name
```

It is necessary to use the following:

```
print "something meaningful" > (file name)
```

Parentheses should be used around concatenation in all but the most common contexts, such as on the righthand side of '`=`'. Be careful about the kinds of expressions used in string concatenation. In particular, the order of evaluation of expressions used for concatenation is undefined in the `awk` language. Consider this example:

```
BEGIN {
    a = "don't"
    print (a " " (a = "panic"))
}
```

It is not defined whether the assignment to `a` happens before or after the value of `a` is retrieved for producing the concatenated value. The result could be either '`don't panic`', or '`panic panic`'. The precedence of concatenation, when mixed with other operators, is often counter-intuitive. Consider this example:

```
$ awk 'BEGIN { print -12 " " -24 }'
⊣ -12-24
```

This "obviously" is concatenating −12, a space, and −24. But where did the space disappear to? The answer lies in the combination of operator precedences and `awk`'s automatic conversion rules. To get the desired result, write the program in the following manner:

```
$ awk 'BEGIN { print -12 " " (-24) }'
⊣ -12 -24
```

This forces `awk` to treat the '`-`' on the '`-24`' as unary. Otherwise, it's parsed as follows:

$$\begin{aligned} & -12\ (" "\ -\ 24) \\ \Rightarrow\ & -12\ (0\ -\ 24) \\ \Rightarrow\ & -12\ (-24) \\ \Rightarrow\ & -12-24 \end{aligned}$$

As mentioned earlier, when doing concatenation, *parenthesize*. Otherwise, you're never quite sure what you'll get.

5.7 Assignment Expressions

An *assignment* is an expression that stores a (usually different) value into a variable. For example, let's assign the value one to the variable `z`:

```
z = 1
```

After this expression is executed, the variable `z` has the value one. Whatever old value `z` had before the assignment is forgotten.

Assignments can also store string values. For example, the following stores the value `"this food is good"` in the variable `message`:

```
thing = "food"
predicate = "good"
message = "this " thing " is " predicate
```

This also illustrates string concatenation. The '`=`' sign is called an *assignment operator*. It is the simplest assignment operator because the value of the righthand operand is stored unchanged. Most operators (addition, concatenation, and so on) have no effect except to compute a value. If the value isn't used, there's no reason to use the operator. An assignment operator is different; it does produce a value, but even if you ignore it, the assignment still makes itself felt through the alteration of the variable. We call this a *side effect*.

The lefthand operand of an assignment need not be a variable (see Section 5.3 [Variables], page 76); it can also be a field (see Section 3.4 [Changing the Contents of a Field], page 41) or an array element (see Chapter 7 [Arrays in `awk`], page 116). These are all called *lvalues*, which means they can appear on the lefthand side of an assignment operator. The righthand operand may be any expression; it produces the new value that the assignment stores in the specified variable, field, or array element. (Such values are called *rvalues*.)

It is important to note that variables do *not* have permanent types. A variable's type is simply the type of whatever value it happens to hold at the moment. In the following program fragment, the variable `foo` has a numeric value at first, and a string value later on:

```
foo = 1
```

```
print foo
foo = "bar"
print foo
```

When the second assignment gives `foo` a string value, the fact that it previously had a numeric value is forgotten.

String values that do not begin with a digit have a numeric value of zero. After executing the following code, the value of `foo` is five:

```
foo = "a string"
foo = foo + 5
```

> **NOTE:** Using a variable as a number and then later as a string can be confusing and is poor programming style. The previous two examples illustrate how `awk` works, *not* how you should write your programs!

An assignment is an expression, so it has a value—the same value that is assigned. Thus, '`z = 1`' is an expression with the value one. One consequence of this is that you can write multiple assignments together, such as:

```
x = y = z = 5
```

This example stores the value five in all three variables (`x`, `y`, and `z`). It does so because the value of '`z = 5`', which is five, is stored into `y` and then the value of '`y = z = 5`', which is five, is stored into `x`.

Assignments may be used anywhere an expression is called for. For example, it is valid to write '`x != (y = 1)`' to set `y` to one, and then test whether `x` equals one. But this style tends to make programs hard to read; such nesting of assignments should be avoided, except perhaps in a one-shot program.

Aside from '`=`', there are several other assignment operators that do arithmetic with the old value of the variable. For example, the operator '`+=`' computes a new value by adding the righthand value to the old value of the variable. Thus, the following assignment adds five to the value of `foo`:

```
foo += 5
```

This is equivalent to the following:

```
foo = foo + 5
```

Use whichever makes the meaning of your program clearer.

There are situations where using '`+=`' (or any assignment operator) is *not* the same as simply repeating the lefthand operand in the righthand expression. For example:

```
# Thanks to Pat Rankin for this example
BEGIN  {
    foo[rand()] += 5
    for (x in foo)
       print x, foo[x]

    bar[rand()] = bar[rand()] + 5
    for (x in bar)
       print x, bar[x]
}
```

The indices of `bar` are practically guaranteed to be different, because `rand` returns different values each time it is called. (Arrays and the `rand` function haven't been covered yet. See Chapter 7 [Arrays in `awk`], page 116, and see Section 8.1.2 [Numeric Functions], page 127, for more information). This example illustrates an important fact about assignment operators: the lefthand expression is only evaluated *once*. It is up to the implementation as to which expression is evaluated first, the lefthand or the righthand. Consider this example:

```
i = 1
a[i += 2] = i + 1
```

The value of `a[3]` could be either two or four.

Table 5.1 lists the arithmetic assignment operators. In each case, the righthand operand is an expression whose value is converted to a number.

Operator	**Effect**
lvalue `+=` *increment*	Adds *increment* to the value of *lvalue*.
lvalue `-=` *decrement*	Subtracts *decrement* from the value of *lvalue*.
lvalue `*=` *coefficient*	Multiplies the value of *lvalue* by *coefficient*.
lvalue `/=` *divisor*	Divides the value of *lvalue* by *divisor*.
lvalue `%=` *modulus*	Sets *lvalue* to its remainder by *modulus*.
lvalue `^=` *power*	
lvalue `**=` *power*	Raises *lvalue* to the power *power*.

Table 5.1: Arithmetic Assignment Operators

NOTE: Only the '`^=`' operator is specified by POSIX. For maximum portability, do not use the '`**=`' operator.

Advanced Notes: Syntactic Ambiguities Between '/=' and Regular Expressions

There is a syntactic ambiguity between the '`/=`' assignment operator and regexp constants whose first character is an '`=`'. This is most notable in commercial `awk` versions. For example:

```
$ awk /==/ /dev/null
error  awk: syntax error at source line 1
error   context is
error           >>> /= <<<
error  awk: bailing out at source line 1
```

A workaround is:

```
awk '/[=]=/' /dev/null
```

`gawk` does not have this problem, nor do the other freely available versions described in Section B.6 [Other Freely Available `awk` Implementations], page 277.

5.8 Increment and Decrement Operators

Increment and *decrement operators* increase or decrease the value of a variable by one. An assignment operator can do the same thing, so the increment operators add no power to the `awk` language; however, they are convenient abbreviations for very common operations.

The operator used for adding one is written '`++`'. It can be used to increment a variable either before or after taking its value. To pre-increment a variable `v`, write '`++v`'. This adds one to the value of `v`—that new value is also the value of the expression. (The assignment expression '`v += 1`' is completely equivalent.) Writing the '`++`' after the variable specifies post-increment. This increments the variable value just the same; the difference is that the value of the increment expression itself is the variable's *old* value. Thus, if `foo` has the value four, then the expression '`foo++`' has the value four, but it changes the value of `foo` to five. In other words, the operator returns the old value of the variable, but with the side effect of incrementing it.

The post-increment '`foo++`' is nearly the same as writing '`(foo += 1) - 1`'. It is not perfectly equivalent because all numbers in `awk` are floating-point—in floating-point, '`foo + 1 - 1`' does not necessarily equal `foo`. But the difference is minute as long as you stick to numbers that are fairly small (less than 10e12).

Fields and array elements are incremented just like variables. (Use '`$(i++)`' when you want to do a field reference and a variable increment at the same time. The parentheses are necessary because of the precedence of the field reference operator '`$`'.)

The decrement operator '`--`' works just like '`++`', except that it subtracts one instead of adding it. As with '`++`', it can be used before the lvalue to pre-decrement or after it to post-decrement. Following is a summary of increment and decrement expressions:

`++`*`lvalue`* This expression increments *lvalue*, and the new value becomes the value of the expression.

`lvalue``++` This expression increments *lvalue*, but the value of the expression is the *old* value of *lvalue*.

`--`*`lvalue`* This expression is like '`++`*`lvalue`*', but instead of adding, it subtracts. It decrements *lvalue* and delivers the value that is the result.

`lvalue``--` This expression is like '*`lvalue`*`++`', but instead of adding, it subtracts. It decrements *lvalue*. The value of the expression is the *old* value of *lvalue*.

Advanced Notes: Operator Evaluation Order

> *Doctor, doctor! It hurts when I do this!*
> *So don't do that!*
> Groucho Marx

What happens for something like the following?

```
b = 6
print b += b++
```

Or something even stranger?

```
b = 6
b += ++b + b++
print b
```

In other words, when do the various side effects prescribed by the postfix operators ('`b++`') take effect? When side effects happen is *implementation defined*. In other words, it is up to the particular version of `awk`. The result for the first example may be 12 or 13, and for the second, it may be 22 or 23.

In short, doing things like this is not recommended and definitely not anything that you can rely upon for portability. You should avoid such things in your own programs.

5.9 True and False in awk

Many programming languages have a special representation for the concepts of "true" and "false." Such languages usually use the special constants `true` and `false`, or perhaps their uppercase equivalents. However, `awk` is different. It borrows a very simple concept of true and false from C. In `awk`, any nonzero numeric value *or* any nonempty string value is true. Any other value (zero or the null string `""`) is false. The following program prints '`A strange truth value`' three times:

```
BEGIN {
   if (3.1415927)
       print "A strange truth value"
   if ("Four Score And Seven Years Ago")
       print "A strange truth value"
   if (j = 57)
       print "A strange truth value"
}
```

There is a surprising consequence of the "nonzero or non-null" rule: the string constant `"0"` is actually true, because it is non-null.

5.10 Variable Typing and Comparison Expressions

The Guide is definitive. Reality is frequently inaccurate.
The Hitchhiker's Guide to the Galaxy

Unlike other programming languages, `awk` variables do not have a fixed type. Instead, they can be either a number or a string, depending upon the value that is assigned to them.

The 1992 POSIX standard introduced the concept of a *numeric string*, which is simply a string that looks like a number—for example, `" +2"`. This concept is used for determining the type of a variable. The type of the variable is important because the types of two variables determine how they are compared. In `gawk`, variable typing follows these rules:

- A numeric constant or the result of a numeric operation has the *numeric* attribute.
- A string constant or the result of a string operation has the *string* attribute.
- Fields, `getline` input, `FILENAME`, `ARGV` elements, `ENVIRON` elements, and the elements of an array created by `split` that are numeric strings have the *strnum* attribute. Otherwise, they have the *string* attribute. Uninitialized variables also have the *strnum* attribute.
- Attributes propagate across assignments but are not changed by any use.

The last rule is particularly important. In the following program, `a` has numeric type, even though it is later used in a string operation:

```
BEGIN {
        a = 12.345
        b = a " is a cute number"
        print b
```

```
}
```

When two operands are compared, either string comparison or numeric comparison may be used. This depends upon the attributes of the operands, according to the following symmetric matrix:

	STRING	NUMERIC	STRNUM
STRING	string	string	string
NUMERIC	string	numeric	numeric
STRNUM	string	numeric	numeric

The basic idea is that user input that looks numeric—and *only* user input—should be treated as numeric, even though it is actually made of characters and is therefore also a string. Thus, for example, the string constant `" +3.14"` is a string, even though it looks numeric, and is *never* treated as number for comparison purposes.

In short, when one operand is a "pure" string, such as a string constant, then a string comparison is performed. Otherwise, a numeric comparison is performed.[3]

Comparison expressions compare strings or numbers for relationships such as equality. They are written using *relational operators*, which are a superset of those in C. Table 5.2 describes them.

Expression	**Result**
x `<` *y*	True if *x* is less than *y*.
x `<=` *y*	True if *x* is less than or equal to *y*.
x `>` *y*	True if *x* is greater than *y*.
x `>=` *y*	True if *x* is greater than or equal to *y*.
x `==` *y*	True if *x* is equal to *y*.
x `!=` *y*	True if *x* is not equal to *y*.
x `~` *y*	True if the string *x* matches the regexp denoted by *y*.
x `!~` *y*	True if the string *x* does not match the regexp denoted by *y*.
subscript `in` *array*	True if the array *array* has an element with the subscript *subscript*.

Table 5.2: Relational Operators

Comparison expressions have the value one if true and zero if false. When comparing operands of mixed types, numeric operands are converted to strings using the value of `CONVFMT` (see Section 5.4 [Conversion of Strings and Numbers], page 77).

Strings are compared by comparing the first character of each, then the second character of each, and so on. Thus, `"10"` is less than `"9"`. If there are two strings where one is a prefix of the other, the shorter string is less than the longer one. Thus, `"abc"` is less than `"abcd"`.

It is very easy to accidentally mistype the '`==`' operator and leave off one of the '`=`' characters. The result is still valid `awk` code, but the program does not do what is intended:

```
if (a = b)   # oops! should be a == b
   ...
```

[3] The POSIX standard is under revision. The revised standard's rules for typing and comparison are the same as just described for `gawk`.

```
else
   ...
```

Unless `b` happens to be zero or the null string, the `if` part of the test always succeeds. Because the operators are so similar, this kind of error is very difficult to spot when scanning the source code.

The following table of expressions illustrates the kind of comparison `gawk` performs, as well as what the result of the comparison is:

`1.5 <= 2.0`
: numeric comparison (true)

`"abc" >= "xyz"`
: string comparison (false)

`1.5 != " +2"`
: string comparison (true)

`"1e2" < "3"`
: string comparison (true)

```
a = 2; b = "2"
a == b
```
: string comparison (true)

```
a = 2; b = " +2"
a == b
```
: string comparison (false)

In the next example:

```
$ echo 1e2 3 | awk '{ print ($1 < $2) ? "true" : "false" }'
⊣ false
```

the result is '`false`' because both `$1` and `$2` are user input. They are numeric strings—therefore both have the *strnum* attribute, dictating a numeric comparison. The purpose of the comparison rules and the use of numeric strings is to attempt to produce the behavior that is "least surprising," while still "doing the right thing." String comparisons and regular expression comparisons are very different. For example:

```
x == "foo"
```

has the value one, or is true if the variable `x` is precisely '`foo`'. By contrast:

```
x ~ /foo/
```

has the value one if `x` contains '`foo`', such as `"Oh, what a fool am I!"`.

The righthand operand of the '`~`' and '`!~`' operators may be either a regexp constant (`/.../`) or an ordinary expression. In the latter case, the value of the expression as a string is used as a dynamic regexp (see Section 2.1 [How to Use Regular Expressions], page 24; also see Section 2.8 [Using Dynamic Regexps], page 34).

In modern implementations of `awk`, a constant regular expression in slashes by itself is also an expression. The regexp `/regexp/` is an abbreviation for the following comparison expression:

```
$0 ~ /regexp/
```

One special place where `/foo/` is *not* an abbreviation for '`$0 ~ /foo/`' is when it is the righthand operand of '`~`' or '`!~`'. See Section 5.2 [Using Regular Expression Constants], page 74, where this is discussed in more detail.

5.11 Boolean Expressions

A *Boolean expression* is a combination of comparison expressions or matching expressions, using the Boolean operators "or" ('||'), "and" ('&&'), and "not" ('!'), along with parentheses to control nesting. The truth value of the Boolean expression is computed by combining the truth values of the component expressions. Boolean expressions are also referred to as *logical expressions*. The terms are equivalent.

Boolean expressions can be used wherever comparison and matching expressions can be used. They can be used in `if`, `while`, `do`, and `for` statements (see Section 6.4 [Control Statements in Actions], page 99). They have numeric values (one if true, zero if false) that come into play if the result of the Boolean expression is stored in a variable or used in arithmetic.

In addition, every Boolean expression is also a valid pattern, so you can use one as a pattern to control the execution of rules. The Boolean operators are:

boolean1 `&&` *boolean2*
: True if both *boolean1* and *boolean2* are true. For example, the following statement prints the current input record if it contains both '`2400`' and '`foo`':

```
if ($0 ~ /2400/ && $0 ~ /foo/) print
```

The subexpression *boolean2* is evaluated only if *boolean1* is true. This can make a difference when *boolean2* contains expressions that have side effects. In the case of '`$0 ~ /foo/ && ($2 == bar++)`', the variable `bar` is not incremented if there is no substring '`foo`' in the record.

boolean1 `||` *boolean2*
: True if at least one of *boolean1* or *boolean2* is true. For example, the following statement prints all records in the input that contain *either* '`2400`' or '`foo`' or both:

```
if ($0 ~ /2400/ || $0 ~ /foo/) print
```

The subexpression *boolean2* is evaluated only if *boolean1* is false. This can make a difference when *boolean2* contains expressions that have side effects.

`!` *boolean*
: True if *boolean* is false. For example, the following program prints '`no home!`' in the unusual event that the `HOME` environment variable is not defined:

```
BEGIN { if (! ("HOME" in ENVIRON))
                print "no home!" }
```

(The `in` operator is described in Section 7.2 [Referring to an Array Element], page 117.)

The '`&&`' and '`||`' operators are called *short-circuit* operators because of the way they work. Evaluation of the full expression is "short-circuited" if the result can be determined part way through its evaluation.

Statements that use '`&&`' or '`||`' can be continued simply by putting a newline after them. But you cannot put a newline in front of either of these operators without using backslash continuation (see Section 1.6 [`awk` Statements Versus Lines], page 20).

The actual value of an expression using the '`!`' operator is either one or zero, depending upon the truth value of the expression it is applied to. The '`!`' operator is often useful for

changing the sense of a flag variable from false to true and back again. For example, the following program is one way to print lines in between special bracketing lines:

```
$1 == "START"   { interested = ! interested; next }
interested == 1 { print }
$1 == "END"     { interested = ! interested; next }
```

The variable `interested`, as with all `awk` variables, starts out initialized to zero, which is also false. When a line is seen whose first field is '`START`', the value of `interested` is toggled to true, using '`!`'. The next rule prints lines as long as `interested` is true. When a line is seen whose first field is '`END`', `interested` is toggled back to false.

> **NOTE:** The `next` statement is discussed in Section 6.4.8 [The `next` Statement], page 105. `next` tells `awk` to skip the rest of the rules, get the next record, and start processing the rules over again at the top. The reason it's there is to avoid printing the bracketing '`START`' and '`END`' lines.

5.12 Conditional Expressions

A *conditional expression* is a special kind of expression that has three operands. It allows you to use one expression's value to select one of two other expressions. The conditional expression is the same as in the C language, as shown here:

```
selector ? if-true-exp : if-false-exp
```

There are three subexpressions. The first, *selector*, is always computed first. If it is "true" (not zero or not null), then *if-true-exp* is computed next and its value becomes the value of the whole expression. Otherwise, *if-false-exp* is computed next and its value becomes the value of the whole expression. For example, the following expression produces the absolute value of `x`:

```
x >= 0 ? x : -x
```

Each time the conditional expression is computed, only one of *if-true-exp* and *if-false-exp* is used; the other is ignored. This is important when the expressions have side effects. For example, this conditional expression examines element `i` of either array `a` or array `b`, and increments `i`:

```
x == y ? a[i++] : b[i++]
```

This is guaranteed to increment `i` exactly once, because each time only one of the two increment expressions is executed and the other is not. See Chapter 7 [Arrays in `awk`], page 116, for more information about arrays.

As a minor `gawk` extension, a statement that uses '`?:`' can be continued simply by putting a newline after either character. However, putting a newline in front of either character does not work without using backslash continuation (see Section 1.6 [`awk` Statements Versus Lines], page 20). If '`--posix`' is specified (see Section 11.2 [Command-Line Options], page 173), then this extension is disabled.

5.13 Function Calls

A *function* is a name for a particular calculation. This enables you to ask for it by name at any point in the program. For example, the function `sqrt` computes the square root of a number.

A fixed set of functions are *built-in*, which means they are available in every `awk` program. The `sqrt` function is one of these. See Section 8.1 [Built-in Functions], page 127, for a list of built-in functions and their descriptions. In addition, you can define functions for use in your program. See Section 8.2 [User-Defined Functions], page 149, for instructions on how to do this.

The way to use a function is with a *function call* expression, which consists of the function name followed immediately by a list of *arguments* in parentheses. The arguments are expressions that provide the raw materials for the function's calculations. When there is more than one argument, they are separated by commas. If there are no arguments, just write '`()`' after the function name. The following examples show function calls with and without arguments:

```
sqrt(x^2 + y^2)        one argument
atan2(y, x)            two arguments
rand()                 no arguments
```

Caution: Do not put any space between the function name and the open-parenthesis! A user-defined function name looks just like the name of a variable—a space would make the expression look like concatenation of a variable with an expression inside parentheses.

With built-in functions, space before the parenthesis is harmless, but it is best not to get into the habit of using space to avoid mistakes with user-defined functions. Each function expects a particular number of arguments. For example, the `sqrt` function must be called with a single argument, the number of which to take the square root:

```
sqrt(argument)
```

Some of the built-in functions have one or more optional arguments. If those arguments are not supplied, the functions use a reasonable default value. See Section 8.1 [Built-in Functions], page 127, for full details. If arguments are omitted in calls to user-defined functions, then those arguments are treated as local variables and initialized to the empty string (see Section 8.2 [User-Defined Functions], page 149).

Like every other expression, the function call has a value, which is computed by the function based on the arguments you give it. In this example, the value of '`sqrt(argument)`' is the square root of *argument*. A function can also have side effects, such as assigning values to certain variables or doing I/O. The following program reads numbers, one number per line, and prints the square root of each one:

```
$ awk '{ print "The square root of", $1, "is", sqrt($1) }'
1
⊣ The square root of 1 is 1
3
⊣ The square root of 3 is 1.73205
5
⊣ The square root of 5 is 2.23607
Ctrl-d
```

5.14 Operator Precedence (How Operators Nest)

Operator precedence determines how operators are grouped when different operators appear close by in one expression. For example, '`*`' has higher precedence than '`+`'; thus, '`a + b * c`' means to multiply `b` and `c`, and then add `a` to the product (i.e., '`a + (b * c)`').

The normal precedence of the operators can be overruled by using parentheses. Think of the precedence rules as saying where the parentheses are assumed to be. In fact, it is wise to always use parentheses whenever there is an unusual combination of operators, because other people who read the program may not remember what the precedence is in this case. Even experienced programmers occasionally forget the exact rules, which leads to mistakes. Explicit parentheses help prevent any such mistakes.

When operators of equal precedence are used together, the leftmost operator groups first, except for the assignment, conditional, and exponentiation operators, which group in the opposite order. Thus, '`a - b + c`' groups as '`(a - b) + c`' and '`a = b = c`' groups as '`a = (b = c)`'.

The precedence of prefix unary operators does not matter as long as only unary operators are involved, because there is only one way to interpret them: innermost first. Thus, '`$++i`' means '`$(++i)`' and '`++$x`' means '`++($x)`'. However, when another operator follows the operand, then the precedence of the unary operators can matter. '`$x^2`' means '`($x)^2`', but '`-x^2`' means '`-(x^2)`', because '`-`' has lower precedence than '`^`', whereas '`$`' has higher precedence. This table presents `awk`'s operators, in order of highest to lowest precedence:

`(...)` Grouping.

`$` Field.

`++ --` Increment, decrement.

`^ **` Exponentiation. These operators group right-to-left.

`+ - !` Unary plus, minus, logical "not."

`* / %` Multiplication, division, modulus.

`+ -` Addition, subtraction.

String Concatenation
: No special symbol is used to indicate concatenation. The operands are simply written side by side (see Section 5.6 [String Concatenation], page 80).

`< <= == !=`
`> >= >> | |&`
: Relational and redirection. The relational operators and the redirections have the same precedence level. Characters such as '`>`' serve both as relationals and as redirections; the context distinguishes between the two meanings.

  Note that the I/O redirection operators in `print` and `printf` statements belong to the statement level, not to expressions. The redirection does not produce an expression that could be the operand of another operator. As a result, it does not make sense to use a redirection operator near another operator of lower precedence without parentheses. Such combinations (for example, '`print foo > a ? b : c`'), result in syntax errors. The correct way to write this statement is '`print foo > (a ? b : c)`'.

`~ !~` Matching, nonmatching.

`in` Array membership.

`&&` Logical "and".

`||` Logical "or".

`?:` Conditional. This operator groups right-to-left.

`= += -= *=`
`/= %= ^= **=`
Assignment. These operators group right to left.

NOTE: The '`|&`', '`**`', and '`**=`' operators are not specified by POSIX. For maximum portability, do not use them.

6 Patterns, Actions, and Variables

As you have already seen, each `awk` statement consists of a pattern with an associated action. This chapter describes how you build patterns and actions, what kinds of things you can do within actions, and `awk`'s built-in variables.

The pattern-action rules and the statements available for use within actions form the core of `awk` programming. In a sense, everything covered up to here has been the foundation that programs are built on top of. Now it's time to start building something useful.

6.1 Pattern Elements

Patterns in `awk` control the execution of rules—a rule is executed when its pattern matches the current input record. The following is a summary of the types of `awk` patterns:

`/regular expression/`
: A regular expression. It matches when the text of the input record fits the regular expression. (See Chapter 2 [Regular Expressions], page 24.)

`expression`
: A single expression. It matches when its value is nonzero (if a number) or non-null (if a string). (See Section 6.1.2 [Expressions as Patterns], page 93.)

`pat1, pat2`
: A pair of patterns separated by a comma, specifying a range of records. The range includes both the initial record that matches *pat1* and the final record that matches *pat2*. (See Section 6.1.3 [Specifying Record Ranges with Patterns], page 95.)

`BEGIN`
`END`
: Special patterns for you to supply startup or cleanup actions for your `awk` program. (See Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96.)

`empty`
: The empty pattern matches every input record. (See Section 6.1.5 [The Empty Pattern], page 97.)

6.1.1 Regular Expressions as Patterns

Regular expressions are one of the first kinds of patterns presented in this book. This kind of pattern is simply a regexp constant in the pattern part of a rule. Its meaning is '`$0 ~ /pattern/`'. The pattern matches when the input record matches the regexp. For example:

```
/foo|bar|baz/  { buzzwords++ }
END            { print buzzwords, "buzzwords seen" }
```

6.1.2 Expressions as Patterns

Any `awk` expression is valid as an `awk` pattern. The pattern matches if the expression's value is nonzero (if a number) or non-null (if a string). The expression is reevaluated each time the rule is tested against a new input record. If the expression uses fields such as `$1`, the value depends directly on the new input record's text; otherwise, it depends on only what has happened so far in the execution of the `awk` program.

Comparison expressions, using the comparison operators described in Section 5.10 [Variable Typing and Comparison Expressions], page 85, are a very common kind of pattern.

Regexp matching and nonmatching are also very common expressions. The left operand of the '`~`' and '`!~`' operators is a string. The right operand is either a constant regular expression enclosed in slashes (*`/regexp/`*), or any expression whose string value is used as a dynamic regular expression (see Section 2.8 [Using Dynamic Regexps], page 34). The following example prints the second field of each input record whose first field is precisely '`foo`':

```
$ awk '$1 == "foo" { print $2 }' BBS-list
```

(There is no output, because there is no BBS site with the exact name '`foo`'.) Contrast this with the following regular expression match, which accepts any record with a first field that contains '`foo`':

```
$ awk '$1 ~ /foo/ { print $2 }' BBS-list
⊣ 555-1234
⊣ 555-6699
⊣ 555-6480
⊣ 555-2127
```

A regexp constant as a pattern is also a special case of an expression pattern. The expression `/foo/` has the value one if '`foo`' appears in the current input record. Thus, as a pattern, `/foo/` matches any record containing '`foo`'.

Boolean expressions are also commonly used as patterns. Whether the pattern matches an input record depends on whether its subexpressions match. For example, the following command prints all the records in '`BBS-list`' that contain both '`2400`' and '`foo`':

```
$ awk '/2400/ && /foo/' BBS-list
⊣ fooey         555-1234     2400/1200/300     B
```

The following command prints all records in '`BBS-list`' that contain *either* '`2400`' or '`foo`' (or both, of course):

```
$ awk '/2400/ || /foo/' BBS-list
⊣ alpo-net      555-3412     2400/1200/300     A
⊣ bites         555-1675     2400/1200/300     A
⊣ fooey         555-1234     2400/1200/300     B
⊣ foot          555-6699     1200/300          B
⊣ macfoo        555-6480     1200/300          A
⊣ sdace         555-3430     2400/1200/300     A
⊣ sabafoo       555-2127     1200/300          C
```

The following command prints all records in '`BBS-list`' that do *not* contain the string '`foo`':

```
$ awk '! /foo/' BBS-list
⊣ aardvark      555-5553     1200/300          B
⊣ alpo-net      555-3412     2400/1200/300     A
⊣ barfly        555-7685     1200/300          A
⊣ bites         555-1675     2400/1200/300     A
⊣ camelot       555-0542     300               C
⊣ core          555-2912     1200/300          C
⊣ sdace         555-3430     2400/1200/300     A
```

The subexpressions of a Boolean operator in a pattern can be constant regular expressions, comparisons, or any other `awk` expressions. Range patterns are not expressions, so

they cannot appear inside Boolean patterns. Likewise, the special patterns `BEGIN` and `END`, which never match any input record, are not expressions and cannot appear inside Boolean patterns.

6.1.3 Specifying Record Ranges with Patterns

A *range pattern* is made of two patterns separated by a comma, in the form '*`begpat, endpat`*'. It is used to match ranges of consecutive input records. The first pattern, *begpat*, controls where the range begins, while *endpat* controls where the pattern ends. For example, the following:

```
awk '$1 == "on", $1 == "off"' myfile
```

prints every record in '`myfile`' between '`on`'/'`off`' pairs, inclusive.

A range pattern starts out by matching *begpat* against every input record. When a record matches *begpat*, the range pattern is *turned on* and the range pattern matches this record as well. As long as the range pattern stays turned on, it automatically matches every input record read. The range pattern also matches *endpat* against every input record; when this succeeds, the range pattern is turned off again for the following record. Then the range pattern goes back to checking *begpat* against each record.

The record that turns on the range pattern and the one that turns it off both match the range pattern. If you don't want to operate on these records, you can write `if` statements in the rule's action to distinguish them from the records you are interested in.

It is possible for a pattern to be turned on and off by the same record. If the record satisfies both conditions, then the action is executed for just that record. For example, suppose there is text between two identical markers (e.g., the '`%`' symbol), each on its own line, that should be ignored. A first attempt would be to combine a range pattern that describes the delimited text with the `next` statement (not discussed yet, see Section 6.4.8 [The `next` Statement], page 105). This causes `awk` to skip any further processing of the current record and start over again with the next input record. Such a program looks like this:

```
/^%$/,/^%$/    { next }
               { print }
```

This program fails because the range pattern is both turned on and turned off by the first line, which just has a '`%`' on it. To accomplish this task, write the program in the following manner, using a flag:

```
/^%$/     { skip = ! skip; next }
skip == 1 { next } # skip lines with 'skip' set
```

In a range pattern, the comma ('`,`') has the lowest precedence of all the operators (i.e., it is evaluated last). Thus, the following program attempts to combine a range pattern with another, simpler test:

```
echo Yes | awk '/1/,/2/ || /Yes/'
```

The intent of this program is '`(/1/,/2/) || /Yes/`'. However, `awk` interprets this as '`/1/, (/2/ || /Yes/)`'. This cannot be changed or worked around; range patterns do not combine with other patterns:

```
$ echo Yes | gawk '(/1/,/2/) || /Yes/'
error  gawk: cmd. line:1: (/1/,/2/) || /Yes/
```

```
error  gawk: cmd. line:1:           ^ parse error
error  gawk: cmd. line:2: (/1/,/2/) || /Yes/
error  gawk: cmd. line:2:                   ^ unexpected newline
```

6.1.4 The BEGIN and END Special Patterns

All the patterns described so far are for matching input records. The BEGIN and END special patterns are different. They supply startup and cleanup actions for awk programs. BEGIN and END rules must have actions; there is no default action for these rules because there is no current record when they run. BEGIN and END rules are often referred to as "BEGIN and END blocks" by long-time awk programmers.

6.1.4.1 Startup and Cleanup Actions

A BEGIN rule is executed once only, before the first input record is read. Likewise, an END rule is executed once only, after all the input is read. For example:

```
$ awk '
> BEGIN { print "Analysis of \"foo\"" }
> /foo/ { ++n }
> END   { print "\"foo\" appears", n, "times." }' BBS-list
⊣ Analysis of "foo"
⊣ "foo" appears 4 times.
```

This program finds the number of records in the input file 'BBS-list' that contain the string 'foo'. The BEGIN rule prints a title for the report. There is no need to use the BEGIN rule to initialize the counter n to zero, since awk does this automatically (see Section 5.3 [Variables], page 76). The second rule increments the variable n every time a record containing the pattern 'foo' is read. The END rule prints the value of n at the end of the run.

The special patterns BEGIN and END cannot be used in ranges or with Boolean operators (indeed, they cannot be used with any operators). An awk program may have multiple BEGIN and/or END rules. They are executed in the order in which they appear: all the BEGIN rules at startup and all the END rules at termination. BEGIN and END rules may be intermixed with other rules. This feature was added in the 1987 version of awk and is included in the POSIX standard. The original (1978) version of awk required the BEGIN rule to be placed at the beginning of the program, the END rule to be placed at the end, and only allowed one of each. This is no longer required, but it is a good idea to follow this template in terms of program organization and readability.

Multiple BEGIN and END rules are useful for writing library functions, because each library file can have its own BEGIN and/or END rule to do its own initialization and/or cleanup. The order in which library functions are named on the command line controls the order in which their BEGIN and END rules are executed. Therefore, you have to be careful when writing such rules in library files so that the order in which they are executed doesn't matter. See Section 11.2 [Command-Line Options], page 173, for more information on using library functions. See Chapter 12 [A Library of awk Functions], page 181, for a number of useful library functions.

If an `awk` program has only a `BEGIN` rule and no other rules, then the program exits after the `BEGIN` rule is run.[1] However, if an `END` rule exists, then the input is read, even if there are no other rules in the program. This is necessary in case the `END` rule checks the `FNR` and `NR` variables.

6.1.4.2 Input/Output from `BEGIN` and `END` Rules

There are several (sometimes subtle) points to remember when doing I/O from a `BEGIN` or `END` rule. The first has to do with the value of `$0` in a `BEGIN` rule. Because `BEGIN` rules are executed before any input is read, there simply is no input record, and therefore no fields, when executing `BEGIN` rules. References to `$0` and the fields yield a null string or zero, depending upon the context. One way to give `$0` a real value is to execute a `getline` command without a variable (see Section 3.8 [Explicit Input with `getline`], page 51). Another way is simply to assign a value to `$0`.

The second point is similar to the first but from the other direction. Traditionally, due largely to implementation issues, `$0` and `NF` were *undefined* inside an `END` rule. The POSIX standard specifies that `NF` is available in an `END` rule. It contains the number of fields from the last input record. Most probably due to an oversight, the standard does not say that `$0` is also preserved, although logically one would think that it should be. In fact, `gawk` does preserve the value of `$0` for use in `END` rules. Be aware, however, that Unix `awk`, and possibly other implementations, do not.

The third point follows from the first two. The meaning of '`print`' inside a `BEGIN` or `END` rule is the same as always: '`print $0`'. If `$0` is the null string, then this prints an empty line. Many long time `awk` programmers use an unadorned '`print`' in `BEGIN` and `END` rules, to mean '`print ""`', relying on `$0` being null. Although one might generally get away with this in `BEGIN` rules, it is a very bad idea in `END` rules, at least in `gawk`. It is also poor style, since if an empty line is needed in the output, the program should print one explicitly.

Finally, the `next` and `nextfile` statements are not allowed in a `BEGIN` rule, because the implicit read-a-record-and-match-against-the-rules loop has not started yet. Similarly, those statements are not valid in an `END` rule, since all the input has been read. (See Section 6.4.8 [The `next` Statement], page 105, and see Section 6.4.9 [Using `gawk`'s `nextfile` Statement], page 106.)

6.1.5 The Empty Pattern

An empty (i.e., nonexistent) pattern is considered to match *every* input record. For example, the program:

```
awk '{ print $1 }' BBS-list
```

prints the first field of every record.

6.2 Using Shell Variables in Programs

`awk` programs are often used as components in larger programs written in shell. For example, it is very common to use a shell variable to hold a pattern that the `awk` program searches for. There are two ways to get the value of the shell variable into the body of the `awk` program.

[1] The original version of `awk` used to keep reading and ignoring input until the end of the file was seen.

The most common method is to use shell quoting to substitute the variable's value into the program inside the script. For example, in the following program:

```
echo -n "Enter search pattern: "
read pattern
awk "/$pattern/ "'{ nmatches++ }
     END { print nmatches, "found" }' /path/to/data
```

the `awk` program consists of two pieces of quoted text that are concatenated together to form the program. The first part is double-quoted, which allows substitution of the `pattern` variable inside the quotes. The second part is single-quoted.

Variable substitution via quoting works, but can be potentially messy. It requires a good understanding of the shell's quoting rules (see Section 1.1.6 [Shell-Quoting Issues], page 14), and it's often difficult to correctly match up the quotes when reading the program.

A better method is to use `awk`'s variable assignment feature (see Section 5.3.2 [Assigning Variables on the Command Line], page 76) to assign the shell variable's value to an `awk` variable's value. Then use dynamic regexps to match the pattern (see Section 2.8 [Using Dynamic Regexps], page 34). The following shows how to redo the previous example using this technique:

```
echo -n "Enter search pattern: "
read pattern
awk -v pat="$pattern" '$0 ~ pat { nmatches++ }
       END { print nmatches, "found" }' /path/to/data
```

Now, the `awk` program is just one single-quoted string. The assignment '`-v pat="$pattern"`' still requires double quotes, in case there is whitespace in the value of `$pattern`. The `awk` variable `pat` could be named `pattern` too, but that would be more confusing. Using a variable also provides more flexibility, since the variable can be used anywhere inside the program—for printing, as an array subscript, or for any other use—without requiring the quoting tricks at every point in the program.

6.3 Actions

An `awk` program or script consists of a series of rules and function definitions interspersed. (Functions are described later. See Section 8.2 [User-Defined Functions], page 149.) A rule contains a pattern and an action, either of which (but not both) may be omitted. The purpose of the *action* is to tell `awk` what to do once a match for the pattern is found. Thus, in outline, an `awk` program generally looks like this:

```
[pattern] [{ action }]
[pattern] [{ action }]
...
function name(args) { ... }
...
```

An action consists of one or more `awk` *statements*, enclosed in curly braces ('`{...}`'). Each statement specifies one thing to do. The statements are separated by newlines or semicolons. The curly braces around an action must be used even if the action contains only one statement, or if it contains no statements at all. However, if you omit the action entirely, omit the curly braces as well. An omitted action is equivalent to '`{ print $0 }`':

```
/foo/  { }     match foo, do nothing --- empty action
/foo/          match foo, print the record --- omitted action
```

The following types of statements are supported in `awk`:

Expressions
: Call functions or assign values to variables (see Chapter 5 [Expressions], page 73). Executing this kind of statement simply computes the value of the expression. This is useful when the expression has side effects (see Section 5.7 [Assignment Expressions], page 81).

Control statements
: Specify the control flow of `awk` programs. The `awk` language gives you C-like constructs (`if`, `for`, `while`, and `do`) as well as a few special ones (see Section 6.4 [Control Statements in Actions], page 99).

Compound statements
: Consist of one or more statements enclosed in curly braces. A compound statement is used in order to put several statements together in the body of an `if`, `while`, `do`, or `for` statement.

Input statements
: Use the `getline` command (see Section 3.8 [Explicit Input with `getline`], page 51). Also supplied in `awk` are the `next` statement (see Section 6.4.8 [The `next` Statement], page 105), and the `nextfile` statement (see Section 6.4.9 [Using `gawk`'s `nextfile` Statement], page 106).

Output statements
: Such as `print` and `printf`. See Chapter 4 [Printing Output], page 57.

Deletion statements
: For deleting array elements. See Section 7.6 [The `delete` Statement], page 120.

6.4 Control Statements in Actions

Control statements, such as `if`, `while`, and so on, control the flow of execution in `awk` programs. Most of the control statements in `awk` are patterned on similar statements in C.

All the control statements start with special keywords, such as `if` and `while`, to distinguish them from simple expressions. Many control statements contain other statements. For example, the `if` statement contains another statement that may or may not be executed. The contained statement is called the *body*. To include more than one statement in the body, group them into a single *compound statement* with curly braces, separating them with newlines or semicolons.

6.4.1 The `if-else` Statement

The `if-else` statement is `awk`'s decision-making statement. It looks like this:

```
if (condition) then-body [else else-body]
```

The *condition* is an expression that controls what the rest of the statement does. If the *condition* is true, *then-body* is executed; otherwise, *else-body* is executed. The `else` part of the statement is optional. The condition is considered false if its value is zero or the null string; otherwise, the condition is true. Refer to the following:

```
if (x % 2 == 0)
    print "x is even"
else
    print "x is odd"
```

In this example, if the expression '`x % 2 == 0`' is true (that is, if the value of `x` is evenly divisible by two), then the first `print` statement is executed; otherwise, the second `print` statement is executed. If the `else` keyword appears on the same line as *then-body* and *then-body* is not a compound statement (i.e., not surrounded by curly braces), then a semicolon must separate *then-body* from the `else`. To illustrate this, the previous example can be rewritten as:

```
if (x % 2 == 0) print "x is even"; else
        print "x is odd"
```

If the '`;`' is left out, `awk` can't interpret the statement and it produces a syntax error. Don't actually write programs this way, because a human reader might fail to see the `else` if it is not the first thing on its line.

6.4.2 The `while` Statement

In programming, a *loop* is a part of a program that can be executed two or more times in succession. The `while` statement is the simplest looping statement in `awk`. It repeatedly executes a statement as long as a condition is true. For example:

```
while (condition)
  body
```

body is a statement called the *body* of the loop, and *condition* is an expression that controls how long the loop keeps running. The first thing the `while` statement does is test the *condition*. If the *condition* is true, it executes the statement *body*. After *body* has been executed, *condition* is tested again, and if it is still true, *body* is executed again. This process repeats until the *condition* is no longer true. If the *condition* is initially false, the body of the loop is never executed and `awk` continues with the statement following the loop. This example prints the first three fields of each record, one per line:

```
awk '{ i = 1
       while (i <= 3) {
           print $i
           i++
       }
}' inventory-shipped
```

The body of this loop is a compound statement enclosed in braces, containing two statements. The loop works in the following manner: first, the value of `i` is set to one. Then, the `while` statement tests whether `i` is less than or equal to three. This is true when `i` equals one, so the `i`-th field is printed. Then the '`i++`' increments the value of `i` and the loop repeats. The loop terminates when `i` reaches four.

A newline is not required between the condition and the body; however using one makes the program clearer unless the body is a compound statement or else is very simple. The newline after the open-brace that begins the compound statement is not required either, but the program is harder to read without it.

6.4.3 The `do-while` Statement

The `do` loop is a variation of the `while` looping statement. The `do` loop executes the *body* once and then repeats the *body* as long as the *condition* is true. It looks like this:

```
do
  body
while (condition)
```

Even if the *condition* is false at the start, the *body* is executed at least once (and only once, unless executing *body* makes *condition* true). Contrast this with the corresponding `while` statement:

```
while (condition)
  body
```

This statement does not execute *body* even once if the *condition* is false to begin with. The following is an example of a `do` statement:

```
{       i = 1
        do {
           print $0
           i++
        } while (i <= 10)
}
```

This program prints each input record 10 times. However, it isn't a very realistic example, since in this case an ordinary `while` would do just as well. This situation reflects actual experience; only occasionally is there a real use for a `do` statement.

6.4.4 The `for` Statement

The `for` statement makes it more convenient to count iterations of a loop. The general form of the `for` statement looks like this:

```
for (initialization; condition; increment)
  body
```

The *initialization*, *condition*, and *increment* parts are arbitrary `awk` expressions, and *body* stands for any `awk` statement.

The `for` statement starts by executing *initialization*. Then, as long as the *condition* is true, it repeatedly executes *body* and then *increment*. Typically, *initialization* sets a variable to either zero or one, *increment* adds one to it, and *condition* compares it against the desired number of iterations. For example:

```
awk '{ for (i = 1; i <= 3; i++)
          print $i
}' inventory-shipped
```

This prints the first three fields of each input record, with one field per line.

It isn't possible to set more than one variable in the *initialization* part without using a multiple assignment statement such as '`x = y = 0`'. This makes sense only if all the initial values are equal. (But it is possible to initialize additional variables by writing their assignments as separate statements preceding the `for` loop.)

The same is true of the *increment* part. Incrementing additional variables requires separate statements at the end of the loop. The C compound expression, using C's comma operator, is useful in this context but it is not supported in `awk`.

Most often, *increment* is an increment expression, as in the previous example. But this is not required; it can be any expression whatsoever. For example, the following statement prints all the powers of two between 1 and 100:

```
for (i = 1; i <= 100; i *= 2)
  print i
```

If there is nothing to be done, any of the three expressions in the parentheses following the `for` keyword may be omitted. Thus, '`for (; x > 0;)`' is equivalent to '`while (x > 0)`'. If the *condition* is omitted, it is treated as true, effectively yielding an *infinite loop* (i.e., a loop that never terminates).

In most cases, a `for` loop is an abbreviation for a `while` loop, as shown here:

```
initialization
while (condition) {
  body
  increment
}
```

The only exception is when the `continue` statement (see Section 6.4.7 [The `continue` Statement], page 104) is used inside the loop. Changing a `for` statement to a `while` statement in this way can change the effect of the `continue` statement inside the loop.

The `awk` language has a `for` statement in addition to a `while` statement because a `for` loop is often both less work to type and more natural to think of. Counting the number of iterations is very common in loops. It can be easier to think of this counting as part of looping rather than as something to do inside the loop.

6.4.5 The `switch` Statement

NOTE: This subsection describes an experimental feature added in `gawk` 3.1.3. It is *not* enabled by default. To enable it, use the '`--enable-switch`' option to `configure` when `gawk` is being configured and built. See Section B.2.2 [Additional Configuration Options], page 264, for more information.

The `switch` statement allows the evaluation of an expression and the execution of statements based on a `case` match. Case statements are checked for a match in the order they are defined. If no suitable `case` is found, the `default` section is executed, if supplied.

Each `case` contains a single constant, be it numeric, string, or regexp. The `switch` expression is evaluated, and then each `case`'s constant is compared against the result in turn. The type of constant determines the comparison: numeric or string do the usual comparisons. A regexp constant does a regular expression match against the string value of the original expression. The general form of the `switch` statement looks like this:

```
switch (expression) {
case value or regular expression:
    case-body
default:
    default-body
```

```
}
```

Control flow in the `switch` statement works as it does in C. Once a match to a given case is made, case statement bodies are executed until a `break`, `continue`, `next`, `nextfile` or `exit` is encountered, or the end of the `switch` statement itself. For example:

```
switch (NR * 2 + 1) {
case 3:
case "11":
    print NR - 1
    break

case /2[[:digit:]]+/:
    print NR

default:
    print NR + 1

case -1:
    print NR * -1
}
```

Note that if none of the statements specified above halt execution of a matched `case` statement, execution falls through to the next `case` until execution halts. In the above example, for any case value starting with '2' followed by one or more digits, the `print` statement is executed and then falls through into the `default` section, executing its `print` statement. In turn, the -1 case will also be executed since the `default` does not halt execution.

6.4.6 The `break` Statement

The `break` statement jumps out of the innermost `for`, `while`, or `do` loop that encloses it. The following example finds the smallest divisor of any integer, and also identifies prime numbers:

```
# find smallest divisor of num
{
   num = $1
   for (div = 2; div*div <= num; div++)
     if (num % div == 0)
       break
   if (num % div == 0)
     printf "Smallest divisor of %d is %d\n", num, div
   else
     printf "%d is prime\n", num
}
```

When the remainder is zero in the first `if` statement, `awk` immediately *breaks out* of the containing `for` loop. This means that `awk` proceeds immediately to the statement following the loop and continues processing. (This is very different from the `exit` statement, which stops the entire `awk` program. See Section 6.4.10 [The `exit` Statement], page 106.)

Th following program illustrates how the *condition* of a `for` or `while` statement could be replaced with a `break` inside an `if`:

```
# find smallest divisor of num
{
  num = $1
  for (div = 2; ; div++) {
    if (num % div == 0) {
      printf "Smallest divisor of %d is %d\n", num, div
      break
    }
    if (div*div > num) {
      printf "%d is prime\n", num
      break
    }
  }
}
```

The `break` statement has no meaning when used outside the body of a loop. However, although it was never documented, historical implementations of `awk` treated the `break` statement outside of a loop as if it were a `next` statement (see Section 6.4.8 [The `next` Statement], page 105). Recent versions of Unix `awk` no longer allow this usage. `gawk` supports this use of `break` only if '`--traditional`' has been specified on the command line (see Section 11.2 [Command-Line Options], page 173). Otherwise, it is treated as an error, since the POSIX standard specifies that `break` should only be used inside the body of a loop.

6.4.7 The `continue` Statement

As with `break`, the `continue` statement is used only inside `for`, `while`, and `do` loops. It skips over the rest of the loop body, causing the next cycle around the loop to begin immediately. Contrast this with `break`, which jumps out of the loop altogether.

The `continue` statement in a `for` loop directs `awk` to skip the rest of the body of the loop and resume execution with the increment-expression of the `for` statement. The following program illustrates this fact:

```
BEGIN {
     for (x = 0; x <= 20; x++) {
         if (x == 5)
             continue
         printf "%d ", x
     }
     print ""
}
```

This program prints all the numbers from 0 to 20—except for 5, for which the `printf` is skipped. Because the increment '`x++`' is not skipped, `x` does not remain stuck at 5. Contrast the `for` loop from the previous example with the following `while` loop:

```
BEGIN {
     x = 0
```

```
        while (x <= 20) {
            if (x == 5)
                continue
            printf "%d ", x
            x++
        }
        print ""
    }
```

This program loops forever once `x` reaches 5.

The `continue` statement has no meaning when used outside the body of a loop. Historical versions of `awk` treated a `continue` statement outside a loop the same way they treated a `break` statement outside a loop: as if it were a `next` statement (see Section 6.4.8 [The `next` Statement], page 105). Recent versions of Unix `awk` no longer work this way, and `gawk` allows it only if '`--traditional`' is specified on the command line (see Section 11.2 [Command-Line Options], page 173). Just like the `break` statement, the POSIX standard specifies that `continue` should only be used inside the body of a loop.

6.4.8 The `next` Statement

The `next` statement forces `awk` to immediately stop processing the current record and go on to the next record. This means that no further rules are executed for the current record, and the rest of the current rule's action isn't executed.

Contrast this with the effect of the `getline` function (see Section 3.8 [Explicit Input with `getline`], page 51). That also causes `awk` to read the next record immediately, but it does not alter the flow of control in any way (i.e., the rest of the current action executes with a new input record).

At the highest level, `awk` program execution is a loop that reads an input record and then tests each rule's pattern against it. If you think of this loop as a `for` statement whose body contains the rules, then the `next` statement is analogous to a `continue` statement. It skips to the end of the body of this implicit loop and executes the increment (which reads another record).

For example, suppose an `awk` program works only on records with four fields, and it shouldn't fail when given bad input. To avoid complicating the rest of the program, write a "weed out" rule near the beginning, in the following manner:

```
NF != 4 {
  err = sprintf("%s:%d: skipped: NF != 4\n", FILENAME, FNR)
  print err > "/dev/stderr"
  next
}
```

Because of the `next` statement, the program's subsequent rules won't see the bad record. The error message is redirected to the standard error output stream, as error messages should be. For more detail see Section 4.7 [Special File Names in `gawk`], page 67.

According to the POSIX standard, the behavior is undefined if the `next` statement is used in a `BEGIN` or `END` rule. `gawk` treats it as a syntax error. Although POSIX permits it, some other `awk` implementations don't allow the `next` statement inside function bodies (see Section 8.2 [User-Defined Functions], page 149). Just as with any other `next` statement, a

`next` statement inside a function body reads the next record and starts processing it with the first rule in the program. If the `next` statement causes the end of the input to be reached, then the code in any `END` rules is executed. See Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96.

6.4.9 Using `gawk`'s `nextfile` Statement

`gawk` provides the `nextfile` statement, which is similar to the `next` statement. However, instead of abandoning processing of the current record, the `nextfile` statement instructs `gawk` to stop processing the current data file.

The `nextfile` statement is a `gawk` extension. In most other `awk` implementations, or if `gawk` is in compatibility mode (see Section 11.2 [Command-Line Options], page 173), `nextfile` is not special.

Upon execution of the `nextfile` statement, `FILENAME` is updated to the name of the next data file listed on the command line, `FNR` is reset to one, `ARGIND` is incremented, and processing starts over with the first rule in the program. (`ARGIND` hasn't been introduced yet. See Section 6.5 [Built-in Variables], page 107.) If the `nextfile` statement causes the end of the input to be reached, then the code in any `END` rules is executed. See Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96.

The `nextfile` statement is useful when there are many data files to process but it isn't necessary to process every record in every file. Normally, in order to move on to the next data file, a program has to continue scanning the unwanted records. The `nextfile` statement accomplishes this much more efficiently.

While one might think that '`close(FILENAME)`' would accomplish the same as `nextfile`, this isn't true. `close` is reserved for closing files, pipes, and coprocesses that are opened with redirections. It is not related to the main processing that `awk` does with the files listed in `ARGV`.

If it's necessary to use an `awk` version that doesn't support `nextfile`, see Section 12.2.1 [Implementing `nextfile` as a Function], page 183, for a user-defined function that simulates the `nextfile` statement.

The current version of the Bell Laboratories `awk` (see Section B.6 [Other Freely Available `awk` Implementations], page 277) also supports `nextfile`. However, it doesn't allow the `nextfile` statement inside function bodies (see Section 8.2 [User-Defined Functions], page 149). `gawk` does; a `nextfile` inside a function body reads the next record and starts processing it with the first rule in the program, just as any other `nextfile` statement.

Caution: Versions of `gawk` prior to 3.0 used two words ('`next file`') for the `nextfile` statement. In version 3.0, this was changed to one word, because the treatment of '`file`' was inconsistent. When it appeared after `next`, '`file`' was a keyword; otherwise, it was a regular identifier. The old usage is no longer accepted; '`next file`' generates a syntax error.

6.4.10 The `exit` Statement

The `exit` statement causes `awk` to immediately stop executing the current rule and to stop processing input; any remaining input is ignored. The `exit` statement is written as follows:

```
exit [return code]
```

When an `exit` statement is executed from a `BEGIN` rule, the program stops processing everything immediately. No input records are read. However, if an `END` rule is present, as part of executing the `exit` statement, the `END` rule is executed (see Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96). If `exit` is used as part of an `END` rule, it causes the program to stop immediately.

An `exit` statement that is not part of a `BEGIN` or `END` rule stops the execution of any further automatic rules for the current record, skips reading any remaining input records, and executes the `END` rule if there is one.

In such a case, if you don't want the `END` rule to do its job, set a variable to nonzero before the `exit` statement and check that variable in the `END` rule. See Section 12.2.3 [Assertions], page 185, for an example that does this.

If an argument is supplied to `exit`, its value is used as the exit status code for the `awk` process. If no argument is supplied, `exit` returns status zero (success). In the case where an argument is supplied to a first `exit` statement, and then `exit` is called a second time from an `END` rule with no argument, `awk` uses the previously supplied exit value.

For example, suppose an error condition occurs that is difficult or impossible to handle. Conventionally, programs report this by exiting with a nonzero status. An `awk` program can do this using an `exit` statement with a nonzero argument, as shown in the following example:

```
BEGIN {
       if (("date" | getline date_now) <= 0) {
         print "Can't get system date" > "/dev/stderr"
         exit 1
       }
       print "current date is", date_now
       close("date")
}
```

6.5 Built-in Variables

Most `awk` variables are available to use for your own purposes; they never change unless your program assigns values to them, and they never affect anything unless your program examines them. However, a few variables in `awk` have special built-in meanings. `awk` examines some of these automatically, so that they enable you to tell `awk` how to do certain things. Others are set automatically by `awk`, so that they carry information from the internal workings of `awk` to your program.

This section documents all the built-in variables of `gawk`, most of which are also documented in the chapters describing their areas of activity.

6.5.1 Built-in Variables That Control `awk`

The following is an alphabetical list of variables that you can change to control how `awk` does certain things. The variables that are specific to `gawk` are marked with a pound sign ('`#`').

`BINMODE` `#` On non-POSIX systems, this variable specifies use of binary mode for all I/O. Numeric values of one, two, or three specify that input files, output files, or all files, respectively, should use binary I/O. Alternatively, string values of `"r"`

or "w" specify that input files and output files, respectively, should use binary I/O. A string value of "rw" or "wr" indicates that all files should use binary I/O. Any other string value is equivalent to "rw", but gawk generates a warning message. BINMODE is described in more detail in Section B.3.3.4 [Using gawk on PC Operating Systems], page 270.

This variable is a gawk extension. In other awk implementations (except mawk, see Section B.6 [Other Freely Available awk Implementations], page 277), or if gawk is in compatibility mode (see Section 11.2 [Command-Line Options], page 173), it is not special.

CONVFMT This string controls conversion of numbers to strings (see Section 5.4 [Conversion of Strings and Numbers], page 77). It works by being passed, in effect, as the first argument to the sprintf function (see Section 8.1.3 [String-Manipulation Functions], page 129). Its default value is "%.6g". CONVFMT was introduced by the POSIX standard.

FIELDWIDTHS #
This is a space-separated list of columns that tells gawk how to split input with fixed columnar boundaries. Assigning a value to FIELDWIDTHS overrides the use of FS for field splitting. See Section 3.6 [Reading Fixed-Width Data], page 47, for more information.

If gawk is in compatibility mode (see Section 11.2 [Command-Line Options], page 173), then FIELDWIDTHS has no special meaning, and field-splitting operations occur based exclusively on the value of FS.

FS This is the input field separator (see Section 3.5 [Specifying How Fields Are Separated], page 43). The value is a single-character string or a multi-character regular expression that matches the separations between fields in an input record. If the value is the null string (""), then each character in the record becomes a separate field. (This behavior is a gawk extension. POSIX awk does not specify the behavior when FS is the null string.)

The default value is " ", a string consisting of a single space. As a special exception, this value means that any sequence of spaces, tabs, and/or newlines is a single separator.[2] It also causes spaces, tabs, and newlines at the beginning and end of a record to be ignored.

You can set the value of FS on the command line using the '-F' option:

```
awk -F, 'program' input-files
```

If gawk is using FIELDWIDTHS for field splitting, assigning a value to FS causes gawk to return to the normal, FS-based field splitting. An easy way to do this is to simply say 'FS = FS', perhaps with an explanatory comment.

IGNORECASE #
If IGNORECASE is nonzero or non-null, then all string comparisons and all regular expression matching are case independent. Thus, regexp matching with '~' and '!~', as well as the gensub, gsub, index, match, split, and sub functions, record termination with RS, and field splitting with FS, all ignore case when

[2] In POSIX awk, newline does not count as whitespace.

doing their particular regexp operations. However, the value of `IGNORECASE` does *not* affect array subscripting and it does not affect field splitting when using a single-character field separator. See Section 2.6 [Case Sensitivity in Matching], page 32.

If `gawk` is in compatibility mode (see Section 11.2 [Command-Line Options], page 173), then `IGNORECASE` has no special meaning. Thus, string and regexp operations are always case-sensitive.

`LINT #` When this variable is true (nonzero or non-null), `gawk` behaves as if the '`--lint`' command-line option is in effect. (see Section 11.2 [Command-Line Options], page 173). With a value of `"fatal"`, lint warnings become fatal errors. With a value of `"invalid"`, only warnings about things that are actually invalid are issued. (This is not fully implemented yet.) Any other true value prints nonfatal warnings. Assigning a false value to `LINT` turns off the lint warnings.

This variable is a `gawk` extension. It is not special in other `awk` implementations. Unlike the other special variables, changing `LINT` does affect the production of lint warnings, even if `gawk` is in compatibility mode. Much as the '`--lint`' and '`--traditional`' options independently control different aspects of `gawk`'s behavior, the control of lint warnings during program execution is independent of the flavor of `awk` being executed.

`OFMT` This string controls conversion of numbers to strings (see Section 5.4 [Conversion of Strings and Numbers], page 77) for printing with the `print` statement. It works by being passed as the first argument to the `sprintf` function (see Section 8.1.3 [String-Manipulation Functions], page 129). Its default value is `"%.6g"`. Earlier versions of `awk` also used `OFMT` to specify the format for converting numbers to strings in general expressions; this is now done by `CONVFMT`.

`OFS` This is the output field separator (see Section 4.3 [Output Separators], page 59). It is output between the fields printed by a `print` statement. Its default value is `" "`, a string consisting of a single space.

`ORS` This is the output record separator. It is output at the end of every `print` statement. Its default value is `"\n"`, the newline character. (See Section 4.3 [Output Separators], page 59.)

`RS` This is `awk`'s input record separator. Its default value is a string containing a single newline character, which means that an input record consists of a single line of text. It can also be the null string, in which case records are separated by runs of blank lines. If it is a regexp, records are separated by matches of the regexp in the input text. (See Section 3.1 [How Input Is Split into Records], page 36.)

The ability for `RS` to be a regular expression is a `gawk` extension. In most other `awk` implementations, or if `gawk` is in compatibility mode (see Section 11.2 [Command-Line Options], page 173), just the first character of `RS`'s value is used.

`SUBSEP` This is the subscript separator. It has the default value of `"\034"` and is used to separate the parts of the indices of a multidimensional array. Thus,

the expression `foo["A", "B"]` really accesses `foo["A\034B"]` (see Section 7.9 [Multidimensional Arrays], page 122).

`TEXTDOMAIN` #
: This variable is used for internationalization of programs at the `awk` level. It sets the default text domain for specially marked string constants in the source text, as well as for the `dcgettext`, `dcngettext` and `bindtextdomain` functions (see Chapter 9 [Internationalization with `gawk`], page 156). The default value of `TEXTDOMAIN` is `"messages"`.

  This variable is a `gawk` extension. In other `awk` implementations, or if `gawk` is in compatibility mode (see Section 11.2 [Command-Line Options], page 173), it is not special.

6.5.2 Built-in Variables That Convey Information

The following is an alphabetical list of variables that `awk` sets automatically on certain occasions in order to provide information to your program. The variables that are specific to `gawk` are marked with a pound sign ('`#`').

`ARGC`, `ARGV`
: The command-line arguments available to `awk` programs are stored in an array called `ARGV`. `ARGC` is the number of command-line arguments present. See Section 11.3 [Other Command-Line Arguments], page 178. Unlike most `awk` arrays, `ARGV` is indexed from 0 to `ARGC` − 1. In the following example:

```
$ awk 'BEGIN {
>         for (i = 0; i < ARGC; i++)
>             print ARGV[i]
>      }' inventory-shipped BBS-list
⊣ awk
⊣ inventory-shipped
⊣ BBS-list
```

  `ARGV[0]` contains `"awk"`, `ARGV[1]` contains `"inventory-shipped"`, and `ARGV[2]` contains `"BBS-list"`. The value of `ARGC` is three, one more than the index of the last element in `ARGV`, because the elements are numbered from zero.

  The names `ARGC` and `ARGV`, as well as the convention of indexing the array from 0 to `ARGC` − 1, are derived from the C language's method of accessing command-line arguments.

  The value of `ARGV[0]` can vary from system to system. Also, you should note that the program text is *not* included in `ARGV`, nor are any of `awk`'s command-line options. See Section 6.5.3 [Using `ARGC` and `ARGV`], page 113, for information about how `awk` uses these variables.

`ARGIND` #
: The index in `ARGV` of the current file being processed. Every time `gawk` opens a new data file for processing, it sets `ARGIND` to the index in `ARGV` of the file name. When `gawk` is processing the input files, '`FILENAME == ARGV[ARGIND]`' is always true.

This variable is useful in file processing; it allows you to tell how far along you are in the list of data files as well as to distinguish between successive instances of the same file name on the command line.

While you can change the value of `ARGIND` within your `awk` program, `gawk` automatically sets it to a new value when the next file is opened.

This variable is a `gawk` extension. In other `awk` implementations, or if `gawk` is in compatibility mode (see Section 11.2 [Command-Line Options], page 173), it is not special.

`ENVIRON` An associative array that contains the values of the environment. The array indices are the environment variable names; the elements are the values of the particular environment variables. For example, `ENVIRON["HOME"]` might be '`/home/arnold`'. Changing this array does not affect the environment passed on to any programs that `awk` may spawn via redirection or the `system` function.

Some operating systems may not have environment variables. On such systems, the `ENVIRON` array is empty (except for `ENVIRON["AWKPATH"]`, see Section 11.4 [The `AWKPATH` Environment Variable], page 178).

`ERRNO #` If a system error occurs during a redirection for `getline`, during a read for `getline`, or during a `close` operation, then `ERRNO` contains a string describing the error.

`ERRNO` works similarly to the C variable `errno`. In particular `gawk` *never* clears it (sets it to zero or `""`). Thus, you should only expect its value to be meaningful when an I/O operation returns a failure value, such as `getline` returning -1. You are, of course, free to clear it yourself before doing an I/O operation.

This variable is a `gawk` extension. In other `awk` implementations, or if `gawk` is in compatibility mode (see Section 11.2 [Command-Line Options], page 173), it is not special.

`FILENAME` The name of the file that `awk` is currently reading. When no data files are listed on the command line, `awk` reads from the standard input and `FILENAME` is set to `"-"`. `FILENAME` is changed each time a new file is read (see Chapter 3 [Reading Input Files], page 36). Inside a `BEGIN` rule, the value of `FILENAME` is `""`, since there are no input files being processed yet.[3] Note, though, that using `getline` (see Section 3.8 [Explicit Input with `getline`], page 51) inside a `BEGIN` rule can give `FILENAME` a value.

`FNR` The current record number in the current file. `FNR` is incremented each time a new record is read (see Section 3.8 [Explicit Input with `getline`], page 51). It is reinitialized to zero each time a new input file is started.

`NF` The number of fields in the current input record. `NF` is set each time a new record is read, when a new field is created or when `$0` changes (see Section 3.2 [Examining Fields], page 39).

Unlike most of the variables described in this section, assigning a value to `NF` has the potential to affect `awk`'s internal workings. In particular, assignments to `NF`

[3] Some early implementations of Unix `awk` initialized `FILENAME` to `"-"`, even if there were data files to be processed. This behavior was incorrect and should not be relied upon in your programs.

can be used to create or remove fields from the current record: See Section 3.4 [Changing the Contents of a Field], page 41.

`NR` The number of input records `awk` has processed since the beginning of the program's execution (see Section 3.1 [How Input Is Split into Records], page 36). `NR` is incremented each time a new record is read.

`PROCINFO #`

The elements of this array provide access to information about the running `awk` program. The following elements (listed alphabetically) are guaranteed to be available:

`PROCINFO["egid"]`
The value of the `getegid` system call.

`PROCINFO["euid"]`
The value of the `geteuid` system call.

`PROCINFO["FS"]`
This is `"FS"` if field splitting with `FS` is in effect, or it is `"FIELDWIDTHS"` if field splitting with `FIELDWIDTHS` is in effect.

`PROCINFO["gid"]`
The value of the `getgid` system call.

`PROCINFO["pgrpid"]`
The process group ID of the current process.

`PROCINFO["pid"]`
The process ID of the current process.

`PROCINFO["ppid"]`
The parent process ID of the current process.

`PROCINFO["uid"]`
The value of the `getuid` system call.

`PROCINFO["version"]`
The version of `gawk`. This is available from version 3.1.4 and later.

On some systems, there may be elements in the array, `"group1"` through `"group`*N*`"` for some *N*. *N* is the number of supplementary groups that the process has. Use the `in` operator to test for these elements (see Section 7.2 [Referring to an Array Element], page 117).

This array is a `gawk` extension. In other `awk` implementations, or if `gawk` is in compatibility mode (see Section 11.2 [Command-Line Options], page 173), it is not special.

`RLENGTH` The length of the substring matched by the `match` function (see Section 8.1.3 [String-Manipulation Functions], page 129). `RLENGTH` is set by invoking the `match` function. Its value is the length of the matched string, or -1 if no match is found.

`RSTART` The start-index in characters of the substring that is matched by the `match` function (see Section 8.1.3 [String-Manipulation Functions], page 129). `RSTART`

is set by invoking the `match` function. Its value is the position of the string where the matched substring starts, or zero if no match was found.

`RT #` This is set each time a record is read. It contains the input text that matched the text denoted by `RS`, the record separator.

This variable is a `gawk` extension. In other `awk` implementations, or if `gawk` is in compatibility mode (see Section 11.2 [Command-Line Options], page 173), it is not special.

Advanced Notes: Changing `NR` and `FNR`

`awk` increments `NR` and `FNR` each time it reads a record, instead of setting them to the absolute value of the number of records read. This means that a program can change these variables and their new values are incremented for each record. This is demonstrated in the following example:

```
$ echo '1
> 2
> 3
> 4' | awk 'NR == 2 { NR = 17 }
> { print NR }'
⊣ 1
⊣ 17
⊣ 18
⊣ 19
```

Before `FNR` was added to the `awk` language (see Section A.1 [Major Changes Between V7 and SVR3.1], page 252), many `awk` programs used this feature to track the number of records in a file by resetting `NR` to zero when `FILENAME` changed.

6.5.3 Using `ARGC` and `ARGV`

Section 6.5.2 [Built-in Variables That Convey Information], page 110, presented the following program describing the information contained in `ARGC` and `ARGV`:

```
$ awk 'BEGIN {
>         for (i = 0; i < ARGC; i++)
>             print ARGV[i]
>       }' inventory-shipped BBS-list
⊣ awk
⊣ inventory-shipped
⊣ BBS-list
```

In this example, `ARGV[0]` contains '`awk`', `ARGV[1]` contains '`inventory-shipped`', and `ARGV[2]` contains '`BBS-list`'. Notice that the `awk` program is not entered in `ARGV`. The other special command-line options, with their arguments, are also not entered. This includes variable assignments done with the '`-v`' option (see Section 11.2 [Command-Line Options], page 173). Normal variable assignments on the command line *are* treated as arguments and do show up in the `ARGV` array:

```
$ cat showargs.awk
⊣ BEGIN {
⊣     printf "A=%d, B=%d\n", A, B
```

```
⊣     for (i = 0; i < ARGC; i++)
⊣         printf "\tARGV[%d] = %s\n", i, ARGV[i]
⊣ }
⊣ END   { printf "A=%d, B=%d\n", A, B }
$ awk -v A=1 -f showargs.awk B=2 /dev/null
⊣ A=1, B=0
⊣         ARGV[0] = awk
⊣         ARGV[1] = B=2
⊣         ARGV[2] = /dev/null
⊣ A=1, B=2
```

A program can alter `ARGC` and the elements of `ARGV`. Each time `awk` reaches the end of an input file, it uses the next element of `ARGV` as the name of the next input file. By storing a different string there, a program can change which files are read. Use `"-"` to represent the standard input. Storing additional elements and incrementing `ARGC` causes additional files to be read.

If the value of `ARGC` is decreased, that eliminates input files from the end of the list. By recording the old value of `ARGC` elsewhere, a program can treat the eliminated arguments as something other than file names.

To eliminate a file from the middle of the list, store the null string (`""`) into `ARGV` in place of the file's name. As a special feature, `awk` ignores file names that have been replaced with the null string. Another option is to use the `delete` statement to remove elements from `ARGV` (see Section 7.6 [The `delete` Statement], page 120).

All of these actions are typically done in the `BEGIN` rule, before actual processing of the input begins. See Section 13.2.4 [Splitting a Large File into Pieces], page 221, and see Section 13.2.5 [Duplicating Output into Multiple Files], page 223, for examples of each way of removing elements from `ARGV`. The following fragment processes `ARGV` in order to examine, and then remove, command-line options:

```
BEGIN {
    for (i = 1; i < ARGC; i++) {
        if (ARGV[i] == "-v")
            verbose = 1
        else if (ARGV[i] == "-d")
            debug = 1
        else if (ARGV[i] ~ /^-?/) {
            e = sprintf("%s: unrecognized option -- %c",
                    ARGV[0], substr(ARGV[i], 1, ,1))
            print e > "/dev/stderr"
        } else
            break
        delete ARGV[i]
    }
}
```

To actually get the options into the `awk` program, end the `awk` options with '`--`' and then supply the `awk` program's options, in the following manner:

```
awk -f myprog -- -v -d file1 file2 ...
```

This is not necessary in `gawk`. Unless '`--posix`' has been specified, `gawk` silently puts any unrecognized options into `ARGV` for the `awk` program to deal with. As soon as it sees an unknown option, `gawk` stops looking for other options that it might otherwise recognize. The previous example with `gawk` would be:

```
gawk -f myprog -d -v file1 file2 ...
```

Because '`-d`' is not a valid `gawk` option, it and the following '`-v`' are passed on to the `awk` program.

7 Arrays in `awk`

An *array* is a table of values called *elements*. The elements of an array are distinguished by their indices. *Indices* may be either numbers or strings.

This chapter describes how arrays work in `awk`, how to use array elements, how to scan through every element in an array, and how to remove array elements. It also describes how `awk` simulates multidimensional arrays, as well as some of the less obvious points about array usage. The chapter finishes with a discussion of `gawk`'s facility for sorting an array based on its indices.

`awk` maintains a single set of names that may be used for naming variables, arrays, and functions (see Section 8.2 [User-Defined Functions], page 149). Thus, you cannot have a variable and an array with the same name in the same `awk` program.

7.1 Introduction to Arrays

The `awk` language provides one-dimensional arrays for storing groups of related strings or numbers. Every `awk` array must have a name. Array names have the same syntax as variable names; any valid variable name would also be a valid array name. But one name cannot be used in both ways (as an array and as a variable) in the same `awk` program.

Arrays in `awk` superficially resemble arrays in other programming languages, but there are fundamental differences. In `awk`, it isn't necessary to specify the size of an array before starting to use it. Additionally, any number or string in `awk`, not just consecutive integers, may be used as an array index.

In most other languages, arrays must be *declared* before use, including a specification of how many elements or components they contain. In such languages, the declaration causes a contiguous block of memory to be allocated for that many elements. Usually, an index in the array must be a positive integer. For example, the index zero specifies the first element in the array, which is actually stored at the beginning of the block of memory. Index one specifies the second element, which is stored in memory right after the first element, and so on. It is impossible to add more elements to the array, because it has room only for as many elements as given in the declaration. (Some languages allow arbitrary starting and ending indices—e.g., '`15 .. 27`'—but the size of the array is still fixed when the array is declared.)

A contiguous array of four elements might look like the following example, conceptually, if the element values are 8, `"foo"`, `""`, and 30:

8	"foo"	""	30	Value
0	1	2	3	Index

Only the values are stored; the indices are implicit from the order of the values. Here, 8 is the value at index zero, because 8 appears in the position with zero elements before it.

Arrays in `awk` are different—they are *associative*. This means that each array is a collection of pairs: an index and its corresponding array element value:

Element `3`	Value `30`
Element `1`	Value `"foo"`
Element `0`	Value `8`

Element 2 Value ""

The pairs are shown in jumbled order because their order is irrelevant.

One advantage of associative arrays is that new pairs can be added at any time. For example, suppose a tenth element is added to the array whose value is "number ten". The result is:

Element 10 Value "number ten"
Element 3 Value 30
Element 1 Value "foo"
Element 0 Value 8
Element 2 Value ""

Now the array is *sparse*, which just means some indices are missing. It has elements 0–3 and 10, but doesn't have elements 4, 5, 6, 7, 8, or 9.

Another consequence of associative arrays is that the indices don't have to be positive integers. Any number, or even a string, can be an index. For example, the following is an array that translates words from English to French:

Element "dog" Value "chien"
Element "cat" Value "chat"
Element "one" Value "un"
Element 1 Value "un"

Here we decided to translate the number one in both spelled-out and numeric form—thus illustrating that a single array can have both numbers and strings as indices. In fact, array subscripts are always strings; this is discussed in more detail in Section 7.7 [Using Numbers to Subscript Arrays], page 121. Here, the number 1 isn't double-quoted, since awk automatically converts it to a string.

The value of IGNORECASE has no effect upon array subscripting. The identical string value used to store an array element must be used to retrieve it. When awk creates an array (e.g., with the split built-in function), that array's indices are consecutive integers starting at one. (See Section 8.1.3 [String-Manipulation Functions], page 129.)

awk's arrays are efficient—the time to access an element is independent of the number of elements in the array.

7.2 Referring to an Array Element

The principal way to use an array is to refer to one of its elements. An array reference is an expression as follows:

array[*index*]

Here, *array* is the name of an array. The expression *index* is the index of the desired element of the array.

The value of the array reference is the current value of that array element. For example, foo[4.3] is an expression for the element of array foo at index '4.3'.

A reference to an array element that has no recorded value yields a value of "", the null string. This includes elements that have not been assigned any value as well as elements that have been deleted (see Section 7.6 [The delete Statement], page 120). Such a reference automatically creates that array element, with the null string as its value. (In some cases, this is unfortunate, because it might waste memory inside awk.)

To determine whether an element exists in an array at a certain index, use the following expression:

```
index in array
```

This expression tests whether the particular index exists, without the side effect of creating that element if it is not present. The expression has the value one (true) if *array*`[`*index*`]` exists and zero (false) if it does not exist. For example, this statement tests whether the array `frequencies` contains the index '2':

```
if (2 in frequencies)
    print "Subscript 2 is present."
```

Note that this is *not* a test of whether the array `frequencies` contains an element whose *value* is two. There is no way to do that except to scan all the elements. Also, this *does not* create `frequencies[2]`, while the following (incorrect) alternative does:

```
if (frequencies[2] != "")
    print "Subscript 2 is present."
```

7.3 Assigning Array Elements

Array elements can be assigned values just like `awk` variables:

```
array[subscript] = value
```

array is the name of an array. The expression *subscript* is the index of the element of the array that is assigned a value. The expression *value* is the value to assign to that element of the array.

7.4 Basic Array Example

The following program takes a list of lines, each beginning with a line number, and prints them out in order of line number. The line numbers are not in order when they are first read—instead they are scrambled. This program sorts the lines by making an array using the line numbers as subscripts. The program then prints out the lines in sorted order of their numbers. It is a very simple program and gets confused upon encountering repeated numbers, gaps, or lines that don't begin with a number:

```
{
  if ($1 > max)
    max = $1
  arr[$1] = $0
}

END {
  for (x = 1; x <= max; x++)
    print arr[x]
}
```

The first rule keeps track of the largest line number seen so far; it also stores each line into the array `arr`, at an index that is the line's number. The second rule runs after all the input has been read, to print out all the lines. When this program is run with the following input:

```
5  I am the Five man
2  Who are you?  The new number two!
4  . . . And four on the floor
1  Who is number one?
3  I three you.
```

Its output is:

```
1  Who is number one?
2  Who are you?  The new number two!
3  I three you.
4  . . . And four on the floor
5  I am the Five man
```

If a line number is repeated, the last line with a given number overrides the others. Gaps in the line numbers can be handled with an easy improvement to the program's `END` rule, as follows:

```
END {
  for (x = 1; x <= max; x++)
    if (x in arr)
      print arr[x]
}
```

7.5 Scanning All Elements of an Array

In programs that use arrays, it is often necessary to use a loop that executes once for each element of an array. In other languages, where arrays are contiguous and indices are limited to positive integers, this is easy: all the valid indices can be found by counting from the lowest index up to the highest. This technique won't do the job in `awk`, because any number or string can be an array index. So `awk` has a special kind of `for` statement for scanning an array:

```
for (var in array)
  body
```

This loop executes *body* once for each index in *array* that the program has previously used, with the variable *var* set to that index.

The following program uses this form of the `for` statement. The first rule scans the input records and notes which words appear (at least once) in the input, by storing a one into the array `used` with the word as index. The second rule scans the elements of `used` to find all the distinct words that appear in the input. It prints each word that is more than 10 characters long and also prints the number of such words. See Section 8.1.3 [String-Manipulation Functions], page 129, for more information on the built-in function `length`.

```
# Record a 1 for each word that is used at least once
{
    for (i = 1; i <= NF; i++)
        used[$i] = 1
}
```

```
# Find number of distinct words more than 10 characters long
END {
    for (x in used)
        if (length(x) > 10) {
            ++num_long_words
            print x
        }
    print num_long_words, "words longer than 10 characters"
}
```

See Section 13.3.5 [Generating Word-Usage Counts], page 237, for a more detailed example of this type.

The order in which elements of the array are accessed by this statement is determined by the internal arrangement of the array elements within `awk` and cannot be controlled or changed. This can lead to problems if new elements are added to *array* by statements in the loop body; it is not predictable whether the `for` loop will reach them. Similarly, changing *var* inside the loop may produce strange results. It is best to avoid such things.

7.6 The `delete` Statement

To remove an individual element of an array, use the `delete` statement:

```
delete array[index]
```

Once an array element has been deleted, any value the element once had is no longer available. It is as if the element had never been referred to or had been given a value. The following is an example of deleting elements in an array:

```
for (i in frequencies)
  delete frequencies[i]
```

This example removes all the elements from the array `frequencies`. Once an element is deleted, a subsequent `for` statement to scan the array does not report that element and the `in` operator to check for the presence of that element returns zero (i.e., false):

```
delete foo[4]
if (4 in foo)
    print "This will never be printed"
```

It is important to note that deleting an element is *not* the same as assigning it a null value (the empty string, `""`). For example:

```
foo[4] = ""
if (4 in foo)
  print "This is printed, even though foo[4] is empty"
```

It is not an error to delete an element that does not exist. If '`--lint`' is provided on the command line (see Section 11.2 [Command-Line Options], page 173), `gawk` issues a warning message when an element that is not in the array is deleted.

All the elements of an array may be deleted with a single statement by leaving off the subscript in the `delete` statement, as follows:

```
delete array
```

This ability is a `gawk` extension; it is not available in compatibility mode (see Section 11.2 [Command-Line Options], page 173).

Using this version of the `delete` statement is about three times more efficient than the equivalent loop that deletes each element one at a time.

The following statement provides a portable but nonobvious way to clear out an array:[1]

```
split("", array)
```

The `split` function (see Section 8.1.3 [String-Manipulation Functions], page 129) clears out the target array first. This call asks it to split apart the null string. Because there is no data to split out, the function simply clears the array and then returns.

Caution: Deleting an array does not change its type; you cannot delete an array and then use the array's name as a scalar (i.e., a regular variable). For example, the following does not work:

```
a[1] = 3; delete a; a = 3
```

7.7 Using Numbers to Subscript Arrays

An important aspect about arrays to remember is that *array subscripts are always strings.* When a numeric value is used as a subscript, it is converted to a string value before being used for subscripting (see Section 5.4 [Conversion of Strings and Numbers], page 77). This means that the value of the built-in variable `CONVFMT` can affect how your program accesses elements of an array. For example:

```
xyz = 12.153
data[xyz] = 1
CONVFMT = "%2.2f"
if (xyz in data)
    printf "%s is in data\n", xyz
else
    printf "%s is not in data\n", xyz
```

This prints '`12.15 is not in data`'. The first statement gives `xyz` a numeric value. Assigning to `data[xyz]` subscripts `data` with the string value `"12.153"` (using the default conversion value of `CONVFMT`, `"%.6g"`). Thus, the array element `data["12.153"]` is assigned the value one. The program then changes the value of `CONVFMT`. The test '`(xyz in data)`' generates a new string value from `xyz`—this time `"12.15"`—because the value of `CONVFMT` only allows two significant digits. This test fails, since `"12.15"` is a different string from `"12.153"`.

According to the rules for conversions (see Section 5.4 [Conversion of Strings and Numbers], page 77), integer values are always converted to strings as integers, no matter what the value of `CONVFMT` may happen to be. So the usual case of the following works:

```
for (i = 1; i <= maxsub; i++)
    do something with array[i]
```

The "integer values always convert to strings as integers" rule has an additional consequence for array indexing. Octal and hexadecimal constants (see Section 5.1.2 [Octal and Hexadecimal Numbers], page 73) are converted internally into numbers, and their original form is forgotten. This means, for example, that `array[17]`, `array[021]`, and `array[0x11]` all refer to the same element!

[1] Thanks to Michael Brennan for pointing this out.

As with many things in `awk`, the majority of the time things work as one would expect them to. But it is useful to have a precise knowledge of the actual rules which sometimes can have a subtle effect on your programs.

7.8 Using Uninitialized Variables as Subscripts

Suppose it's necessary to write a program to print the input data in reverse order. A reasonable attempt to do so (with some test data) might look like this:

```
$ echo 'line 1
> line 2
> line 3' | awk '{ l[lines] = $0; ++lines }
> END {
>     for (i = lines-1; i >= 0; --i)
>        print l[i]
> }'
 ⊣ line 3
 ⊣ line 2
```

Unfortunately, the very first line of input data did not come out in the output!

At first glance, this program should have worked. The variable `lines` is uninitialized, and uninitialized variables have the numeric value zero. So, `awk` should have printed the value of `l[0]`.

The issue here is that subscripts for `awk` arrays are *always* strings. Uninitialized variables, when used as strings, have the value `""`, not zero. Thus, '`line 1`' ends up stored in `l[""]`. The following version of the program works correctly:

```
{ l[lines++] = $0 }
END {
    for (i = lines - 1; i >= 0; --i)
       print l[i]
}
```

Here, the '`++`' forces `lines` to be numeric, thus making the "old value" numeric zero. This is then converted to `"0"` as the array subscript.

Even though it is somewhat unusual, the null string (`""`) is a valid array subscript. `gawk` warns about the use of the null string as a subscript if '`--lint`' is provided on the command line (see Section 11.2 [Command-Line Options], page 173).

7.9 Multidimensional Arrays

A multidimensional array is an array in which an element is identified by a sequence of indices instead of a single index. For example, a two-dimensional array requires two indices. The usual way (in most languages, including `awk`) to refer to an element of a two-dimensional array named `grid` is with `grid[x,y]`.

Multidimensional arrays are supported in `awk` through concatenation of indices into one string. `awk` converts the indices into strings (see Section 5.4 [Conversion of Strings and Numbers], page 77) and concatenates them together, with a separator between them. This creates a single string that describes the values of the separate indices. The combined string

is used as a single index into an ordinary, one-dimensional array. The separator used is the value of the built-in variable `SUBSEP`.

For example, suppose we evaluate the expression '`foo[5,12] = "value"`' when the value of `SUBSEP` is `"@"`. The numbers 5 and 12 are converted to strings and concatenated with an '`@`' between them, yielding `"5@12"`; thus, the array element `foo["5@12"]` is set to `"value"`.

Once the element's value is stored, `awk` has no record of whether it was stored with a single index or a sequence of indices. The two expressions '`foo[5,12]`' and '`foo[5 SUBSEP 12]`' are always equivalent.

The default value of `SUBSEP` is the string `"\034"`, which contains a nonprinting character that is unlikely to appear in an `awk` program or in most input data. The usefulness of choosing an unlikely character comes from the fact that index values that contain a string matching `SUBSEP` can lead to combined strings that are ambiguous. Suppose that `SUBSEP` is `"@"`; then '`foo["a@b", "c"]`' and '`foo["a", "b@c"]`' are indistinguishable because both are actually stored as '`foo["a@b@c"]`'.

To test whether a particular index sequence exists in a multidimensional array, use the same operator ('`in`') that is used for single dimensional arrays. Write the whole sequence of indices in parentheses, separated by commas, as the left operand:

```
(subscript1, subscript2, ...) in array
```

The following example treats its input as a two-dimensional array of fields; it rotates this array 90 degrees clockwise and prints the result. It assumes that all lines have the same number of elements:

```
{
     if (max_nf < NF)
          max_nf = NF
     max_nr = NR
     for (x = 1; x <= NF; x++)
          vector[x, NR] = $x
}

END {
     for (x = 1; x <= max_nf; x++) {
          for (y = max_nr; y >= 1; --y)
               printf("%s ", vector[x, y])
          printf("\n")
     }
}
```

When given the input:

```
1 2 3 4 5 6
2 3 4 5 6 1
3 4 5 6 1 2
4 5 6 1 2 3
```

the program produces the following output:

```
4 3 2 1
5 4 3 2
```

```
6 5 4 3
1 6 5 4
2 1 6 5
3 2 1 6
```

7.10 Scanning Multidimensional Arrays

There is no special `for` statement for scanning a "multidimensional" array. There cannot be one, because, in truth, there are no multidimensional arrays or elements—there is only a multidimensional *way of accessing* an array.

However, if your program has an array that is always accessed as multidimensional, you can get the effect of scanning it by combining the scanning `for` statement (see Section 7.5 [Scanning All Elements of an Array], page 119) with the built-in `split` function (see Section 8.1.3 [String-Manipulation Functions], page 129). It works in the following manner:

```
for (combined in array) {
    split(combined, separate, SUBSEP)
    ...
}
```

This sets the variable `combined` to each concatenated combined index in the array, and splits it into the individual indices by breaking it apart where the value of `SUBSEP` appears. The individual indices then become the elements of the array `separate`.

Thus, if a value is previously stored in `array[1, "foo"]`; then an element with index `"1\034foo"` exists in `array`. (Recall that the default value of `SUBSEP` is the character with code 034.) Sooner or later, the `for` statement finds that index and does an iteration with the variable `combined` set to `"1\034foo"`. Then the `split` function is called as follows:

```
split("1\034foo", separate, "\034")
```

The result is to set `separate[1]` to `"1"` and `separate[2]` to `"foo"`. Presto! The original sequence of separate indices is recovered.

7.11 Sorting Array Values and Indices with `gawk`

The order in which an array is scanned with a '`for (i in array)`' loop is essentially arbitrary. In most `awk` implementations, sorting an array requires writing a `sort` function. While this can be educational for exploring different sorting algorithms, usually that's not the point of the program. `gawk` provides the built-in `asort` and `asorti` functions (see Section 8.1.3 [String-Manipulation Functions], page 129) for sorting arrays. For example:

```
populate the array data
n = asort(data)
for (i = 1; i <= n; i++)
    do something with data[i]
```

After the call to `asort`, the array `data` is indexed from 1 to some number n, the total number of elements in `data`. (This count is `asort`'s return value.) `data[1]` $\leq$ `data[2]` $\leq$ `data[3]`, and so on. The comparison of array elements is done using `gawk`'s usual comparison rules (see Section 5.10 [Variable Typing and Comparison Expressions], page 85).

An important side effect of calling `asort` is that *the array's original indices are irrevocably lost*. As this isn't always desirable, `asort` accepts a second argument:

```
populate the array source
n = asort(source, dest)
for (i = 1; i <= n; i++)
    do something with dest[i]
```

In this case, gawk copies the source array into the dest array and then sorts dest, destroying its indices. However, the source array is not affected.

Often, what's needed is to sort on the values of the *indices* instead of the values of the elements. To do that, starting with gawk 3.1.2, use the asorti function. The interface is identical to that of asort, except that the index values are used for sorting, and become the values of the result array:

```
{ source[$0] = some_func($0) }

END {
    n = asorti(source, dest)
    for (i = 1; i <= n; i++) {
        do something with dest[i]             Work with sorted indices di-
rectly
        ...
        do something with source[dest[i]]     Access original array via sorted in-
dices
    }
}
```

If your version of gawk is 3.1.0 or 3.1.1, you don't have asorti. Instead, use a helper array to hold the sorted index values, and then access the original array's elements. It works in the following way:

```
populate the array data
# copy indices
j = 1
for (i in data) {
    ind[j] = i    # index value becomes element value
    j++
}
n = asort(ind)    # index values are now sorted
for (i = 1; i <= n; i++) {
    do something with ind[i]           Work with sorted indices directly
    ...
    do something with data[ind[i]]     Access original array via sorted in-
dices
}
```

Sorting the array by replacing the indices provides maximal flexibility. To traverse the elements in decreasing order, use a loop that goes from *n* down to 1, either over the elements or over the indices.

Copying array indices and elements isn't expensive in terms of memory. Internally, gawk maintains *reference counts* to data. For example, when asort copies the first array to the second one, there is only one copy of the original array elements' data, even though both

arrays use the values. Similarly, when copying the indices from `data` to `ind`, there is only one copy of the actual index strings.

We said previously that comparisons are done using `gawk`'s "usual comparison rules." Because `IGNORECASE` affects string comparisons, the value of `IGNORECASE` also affects sorting for both `asort` and `asorti`. Caveat Emptor.

8 Functions

This chapter describes `awk`'s built-in functions, which fall into three categories: numeric, string, and I/O. `gawk` provides additional groups of functions to work with values that represent time, do bit manipulation, and internationalize and localize programs.

Besides the built-in functions, `awk` has provisions for writing new functions that the rest of a program can use. The second half of this chapter describes these *user-defined* functions.

8.1 Built-in Functions

Built-in functions are always available for your `awk` program to call. This section defines all the built-in functions in `awk`; some of these are mentioned in other sections but are summarized here for your convenience.

8.1.1 Calling Built-in Functions

To call one of `awk`'s built-in functions, write the name of the function followed by arguments in parentheses. For example, '`atan2(y + z, 1)`' is a call to the function `atan2` and has two arguments.

Whitespace is ignored between the built-in function name and the open parenthesis, and it is good practice to avoid using whitespace there. User-defined functions do not permit whitespace in this way, and it is easier to avoid mistakes by following a simple convention that always works—no whitespace after a function name.

Each built-in function accepts a certain number of arguments. In some cases, arguments can be omitted. The defaults for omitted arguments vary from function to function and are described under the individual functions. In some `awk` implementations, extra arguments given to built-in functions are ignored. However, in `gawk`, it is a fatal error to give extra arguments to a built-in function.

When a function is called, expressions that create the function's actual parameters are evaluated completely before the call is performed. For example, in the following code fragment:

```
i = 4
j = sqrt(i++)
```

the variable `i` is incremented to the value five before `sqrt` is called with a value of four for its actual parameter. The order of evaluation of the expressions used for the function's parameters is undefined. Thus, avoid writing programs that assume that parameters are evaluated from left to right or from right to left. For example:

```
i = 5
j = atan2(i++, i *= 2)
```

If the order of evaluation is left to right, then `i` first becomes 6, and then 12, and `atan2` is called with the two arguments 6 and 12. But if the order of evaluation is right to left, `i` first becomes 10, then 11, and `atan2` is called with the two arguments 11 and 10.

8.1.2 Numeric Functions

The following list describes all of the built-in functions that work with numbers. Optional parameters are enclosed in square brackets ([ ]):

`int(`*x*`)` This returns the nearest integer to *x*, located between *x* and zero and truncated toward zero.

For example, `int(3)` is 3, `int(3.9)` is 3, `int(-3.9)` is −3, and `int(-3)` is −3 as well.

`sqrt(`*x*`)` This returns the positive square root of *x*. `gawk` reports an error if *x* is negative. Thus, `sqrt(4)` is 2.

`exp(`*x*`)` This returns the exponential of *x* (`e ^ x`) or reports an error if *x* is out of range. The range of values *x* can have depends on your machine's floating-point representation.

`log(`*x*`)` This returns the natural logarithm of *x*, if *x* is positive; otherwise, it reports an error.

`sin(`*x*`)` This returns the sine of *x*, with *x* in radians.

`cos(`*x*`)` This returns the cosine of *x*, with *x* in radians.

`atan2(`*y*`, `*x*`)`
This returns the arctangent of `y / x` in radians.

`rand()` This returns a random number. The values of `rand` are uniformly distributed between zero and one. The value could be zero but is never one.[1]

Often random integers are needed instead. Following is a user-defined function that can be used to obtain a random non-negative integer less than *n*:

```
function randint(n) {
     return int(n * rand())
}
```

The multiplication produces a random number greater than zero and less than `n`. Using `int`, this result is made into an integer between zero and `n` − 1, inclusive.

The following example uses a similar function to produce random integers between one and *n*. This program prints a new random number for each input record:

```
# Function to roll a simulated die.
function roll(n) { return 1 + int(rand() * n) }

# Roll 3 six-sided dice and
# print total number of points.
{
      printf("%d points\n",
             roll(6)+roll(6)+roll(6))
}
```

Caution: In most `awk` implementations, including `gawk`, `rand` starts generating numbers from the same starting number, or *seed*, each time you run `awk`. Thus,

[1] The C version of `rand` is known to produce fairly poor sequences of random numbers. However, nothing requires that an `awk` implementation use the C `rand` to implement the `awk` version of `rand`. In fact, `gawk` uses the BSD `random` function, which is considerably better than `rand`, to produce random numbers.

a program generates the same results each time you run it. The numbers are random within one `awk` run but predictable from run to run. This is convenient for debugging, but if you want a program to do different things each time it is used, you must change the seed to a value that is different in each run. To do this, use `srand`.

`srand([`*x*`])`

The function `srand` sets the starting point, or seed, for generating random numbers to the value *x*.

Each seed value leads to a particular sequence of random numbers.[2] Thus, if the seed is set to the same value a second time, the same sequence of random numbers is produced again.

Different `awk` implementations use different random-number generators internally. Don't expect the same `awk` program to produce the same series of random numbers when executed by different versions of `awk`.

If the argument *x* is omitted, as in '`srand()`', then the current date and time of day are used for a seed. This is the way to get random numbers that are truly unpredictable.

The return value of `srand` is the previous seed. This makes it easy to keep track of the seeds in case you need to consistently reproduce sequences of random numbers.

8.1.3 String-Manipulation Functions

The functions in this section look at or change the text of one or more strings. Optional parameters are enclosed in square brackets ([ ]). Those functions that are specific to `gawk` are marked with a pound sign ('`#`'):

`asort(`*source* [`,` *dest*]`) #`

`asort` is a `gawk`-specific extension, returning the number of elements in the array *source*. The contents of *source* are sorted using `gawk`'s normal rules for comparing values (in particular, `IGNORECASE` affects the sorting) and the indices of the sorted values of *source* are replaced with sequential integers starting with one. If the optional array *dest* is specified, then *source* is duplicated into *dest*. *dest* is then sorted, leaving the indices of *source* unchanged. For example, if the contents of `a` are as follows:

```
a["last"] = "de"
a["first"] = "sac"
a["middle"] = "cul"
```

A call to `asort`:

```
asort(a)
```

results in the following contents of `a`:

```
a[1] = "cul"
```

[2] Computer-generated random numbers really are not truly random. They are technically known as "pseudorandom." This means that while the numbers in a sequence appear to be random, you can in fact generate the same sequence of random numbers over and over again.

```
a[2] = "de"
a[3] = "sac"
```

The `asort` function is described in more detail in Section 7.11 [Sorting Array Values and Indices with `gawk`], page 124. `asort` is a `gawk` extension; it is not available in compatibility mode (see Section 11.2 [Command-Line Options], page 173).

`asorti(`*source* [`,` *dest*]`)` `#`

`asorti` is a `gawk`-specific extension, returning the number of elements in the array *source*. It works similarly to `asort`, however, the *indices* are sorted, instead of the values. As array indices are always strings, the comparison performed is always a string comparison. (Here too, `IGNORECASE` affects the sorting.)

The `asorti` function is described in more detail in Section 7.11 [Sorting Array Values and Indices with `gawk`], page 124. It was added in `gawk` 3.1.2. `asorti` is a `gawk` extension; it is not available in compatibility mode (see Section 11.2 [Command-Line Options], page 173).

`index(`*in*`,` *find*`)`

This searches the string *in* for the first occurrence of the string *find*, and returns the position in characters where that occurrence begins in the string *in*. Consider the following example:

```
$ awk 'BEGIN { print index("peanut", "an") }'
⊣ 3
```

If *find* is not found, `index` returns zero. (Remember that string indices in `awk` start at one.)

`length(`[*string*]`)`

This returns the number of characters in *string*. If *string* is a number, the length of the digit string representing that number is returned. For example, `length("abcde")` is 5. By contrast, `length(15 * 35)` works out to 3. In this example, 15 * 35 = 525, and 525 is then converted to the string `"525"`, which has three characters.

If no argument is supplied, `length` returns the length of `$0`.

> **NOTE:** In older versions of `awk`, the `length` function could be called without any parentheses. Doing so is marked as "deprecated" in the POSIX standard. This means that while a program can do this, it is a feature that can eventually be removed from a future version of the standard. Therefore, for programs to be maximally portable, always supply the parentheses.

`match(`*string*`,` *regexp* [`,` *array*]`)`

The `match` function searches *string* for the longest, leftmost substring matched by the regular expression, *regexp*. It returns the character position, or *index*, at which that substring begins (one, if it starts at the beginning of *string*). If no match is found, it returns zero.

The *regexp* argument may be either a regexp constant (`/.../`) or a string constant (`"..."`). In the latter case, the string is treated as a regexp to be

matched. Section 2.8 [Using Dynamic Regexps], page 34, for a discussion of the difference between the two forms, and the implications for writing your program correctly.

The order of the first two arguments is backwards from most other string functions that work with regular expressions, such as `sub` and `gsub`. It might help to remember that for `match`, the order is the same as for the '`~`' operator: '*`string ~ regexp`*'.

The `match` function sets the built-in variable `RSTART` to the index. It also sets the built-in variable `RLENGTH` to the length in characters of the matched substring. If no match is found, `RSTART` is set to zero, and `RLENGTH` to -1.

For example:

```
{
        if ($1 == "FIND")
          regex = $2
        else {
          where = match($0, regex)
          if (where != 0)
            print "Match of", regex, "found at",
                      where, "in", $0
        }
}
```

This program looks for lines that match the regular expression stored in the variable `regex`. This regular expression can be changed. If the first word on a line is '`FIND`', `regex` is changed to be the second word on that line. Therefore, if given:

```
FIND ru+n
My program runs
but not very quickly
FIND Melvin
JF+KM
This line is property of Reality Engineering Co.
Melvin was here.
```

`awk` prints:

```
Match of ru+n found at 12 in My program runs
Match of Melvin found at 1 in Melvin was here.
```

If *array* is present, it is cleared, and then the 0th element of *array* is set to the entire portion of *string* matched by *regexp*. If *regexp* contains parentheses, the integer-indexed elements of *array* are set to contain the portion of *string* matching the corresponding parenthesized subexpression. For example:

```
$ echo fooooobazbarrrrr |
> gawk '{ match($0, /(fo+).+(bar*)/, arr)
>           print arr[1], arr[2] }'
⊣ foooo barrrrr
```

In addition, beginning with `gawk` 3.1.2, multidimensional subscripts are available providing the start index and length of each matched subexpression:

```
$ echo fooooobazbarrrrr |
> gawk '{ match($0, /(fo+).+(bar*)/, arr)
>           print arr[1], arr[2]
>           print arr[1, "start"], arr[1, "length"]
>           print arr[2, "start"], arr[2, "length"]
> }'
 ⊣ foooo barrrrr
 ⊣ 1 5
 ⊣ 9 7
```

There may not be subscripts for the start and index for every parenthesized subexpressions, since they may not all have matched text; thus they should be tested for with the `in` operator (see Section 7.2 [Referring to an Array Element], page 117).

The *array* argument to `match` is a `gawk` extension. In compatibility mode (see Section 11.2 [Command-Line Options], page 173), using a third argument is a fatal error.

`split(`*`string`*`,` *`array`* `[,` *`fieldsep`*`])`

This function divides *string* into pieces separated by *fieldsep* and stores the pieces in *array*. The first piece is stored in *`array`*`[1]`, the second piece in *`array`*`[2]`, and so forth. The string value of the third argument, *fieldsep*, is a regexp describing where to split *string* (much as `FS` can be a regexp describing where to split input records). If *fieldsep* is omitted, the value of `FS` is used. `split` returns the number of elements created.

The `split` function splits strings into pieces in a manner similar to the way input lines are split into fields. For example:

```
split("cul-de-sac", a, "-")
```

splits the string '`cul-de-sac`' into three fields using '`-`' as the separator. It sets the contents of the array `a` as follows:

```
a[1] = "cul"
a[2] = "de"
a[3] = "sac"
```

The value returned by this call to `split` is three.

As with input field-splitting, when the value of *fieldsep* is `" "`, leading and trailing whitespace is ignored, and the elements are separated by runs of whitespace. Also as with input field-splitting, if *fieldsep* is the null string, each individual character in the string is split into its own array element. (This is a `gawk`-specific extension.)

Note, however, that `RS` has no effect on the way `split` works. Even though '`RS = ""`' causes newline to also be an input field separator, this does not affect how `split` splits strings.

Modern implementations of `awk`, including `gawk`, allow the third argument to be a regexp constant (`/abc/`) as well as a string. The POSIX standard allows this as well. Section 2.8 [Using Dynamic Regexps], page 34, for a discussion of the difference between using a string constant or a regexp constant, and the implications for writing your program correctly.

Before splitting the string, `split` deletes any previously existing elements in the array *array*.

If *string* is null, the array has no elements. (So this is a portable way to delete an entire array with one statement. See Section 7.6 [The `delete` Statement], page 120.)

If *string* does not match *fieldsep* at all (but is not null), *array* has one element only. The value of that element is the original *string*.

`sprintf(`*format*`, `*expression1*`, ...)`

This returns (without printing) the string that `printf` would have printed out with the same arguments (see Section 4.5 [Using `printf` Statements for Fancier Printing], page 60). For example:

```
pival = sprintf("pi = %.2f (approx.)", 22/7)
```

assigns the string `"pi = 3.14 (approx.)"` to the variable `pival`.

`strtonum(`*str*`)` #

Examines *str* and returns its numeric value. If *str* begins with a leading '`0`', `strtonum` assumes that *str* is an octal number. If *str* begins with a leading '`0x`' or '`0X`', `strtonum` assumes that *str* is a hexadecimal number. For example:

```
$ echo 0x11 |
> gawk '{ printf "%d\n", strtonum($1) }'
 ⊣ 17
```

Using the `strtonum` function is *not* the same as adding zero to a string value; the automatic coercion of strings to numbers works only for decimal data, not for octal or hexadecimal.[3]

`strtonum` is a `gawk` extension; it is not available in compatibility mode (see Section 11.2 [Command-Line Options], page 173).

`sub(`*regexp*`, `*replacement*` [, `*target*`])`

The `sub` function alters the value of *target*. It searches this value, which is treated as a string, for the leftmost, longest substring matched by the regular expression *regexp*. Then the entire string is changed by replacing the matched text with *replacement*. The modified string becomes the new value of *target*.

The *regexp* argument may be either a regexp constant ('`/.../`') or a string constant (`"..."`). In the latter case, the string is treated as a regexp to be matched. Section 2.8 [Using Dynamic Regexps], page 34, for a discussion of the difference between the two forms, and the implications for writing your program correctly.

This function is peculiar because *target* is not simply used to compute a value, and not just any expression will do—it must be a variable, field, or array element so that `sub` can store a modified value there. If this argument is omitted, then the default is to use and alter `$0`.[4] For example:

---

[3] Unless you use the '`--non-decimal-data`' option, which isn't recommended. See Section 10.1 [Allowing Nondecimal Input Data], page 165, for more information.

[4] Note that this means that the record will first be regenerated using the value of `OFS` if any fields have been changed, and that the fields will be updated after the substituion, even if the operation is a "no-op" such as '`sub(/^/, "")`'.

```
str = "water, water, everywhere"
sub(/at/, "ith", str)
```

sets `str` to `"wither, water, everywhere"`, by replacing the leftmost longest occurrence of '`at`' with '`ith`'.

The `sub` function returns the number of substitutions made (either one or zero).

If the special character '`&`' appears in *replacement*, it stands for the precise substring that was matched by *regexp*. (If the regexp can match more than one string, then this precise substring may vary.) For example:

```
{ sub(/candidate/, "& and his wife"); print }
```

changes the first occurrence of '`candidate`' to '`candidate and his wife`' on each input line. Here is another example:

```
$ awk 'BEGIN {
>         str = "daabaaa"
>         sub(/a+/, "C&C", str)
>         print str
> }'
 ⊣ dCaaCbaaa
```

This shows how '`&`' can represent a nonconstant string and also illustrates the "leftmost, longest" rule in regexp matching (see Section 2.7 [How Much Text Matches?], page 33).

The effect of this special character ('`&`') can be turned off by putting a backslash before it in the string. As usual, to insert one backslash in the string, you must write two backslashes. Therefore, write '`\\&`' in a string constant to include a literal '`&`' in the replacement. For example, the following shows how to replace the first '`|`' on each line with an '`&`':

```
{ sub(/\|/, "\\&"); print }
```

As mentioned, the third argument to `sub` must be a variable, field or array reference. Some versions of `awk` allow the third argument to be an expression that is not an lvalue. In such a case, `sub` still searches for the pattern and returns zero or one, but the result of the substitution (if any) is thrown away because there is no place to put it. Such versions of `awk` accept expressions such as the following:

```
sub(/USA/, "United States", "the USA and Canada")
```

For historical compatibility, `gawk` accepts erroneous code, such as in the previous example. However, using any other nonchangeable object as the third parameter causes a fatal error and your program will not run.

Finally, if the *regexp* is not a regexp constant, it is converted into a string, and then the value of that string is treated as the regexp to match.

`gsub(`*`regexp`*`,` *`replacement`* `[,` *`target`*`])`

This is similar to the `sub` function, except `gsub` replaces *all* of the longest, leftmost, *nonoverlapping* matching substrings it can find. The '`g`' in `gsub` stands for "global," which means replace everywhere. For example:

```
{ gsub(/Britain/, "United Kingdom"); print }
```

replaces all occurrences of the string 'Britain' with 'United Kingdom' for all input records.

The gsub function returns the number of substitutions made. If the variable to search and alter (*target*) is omitted, then the entire input record ($0) is used. As in sub, the characters '&' and '\' are special, and the third argument must be assignable.

gensub(*regexp*, *replacement*, *how* [, *target*]) #

gensub is a general substitution function. Like sub and gsub, it searches the target string *target* for matches of the regular expression *regexp*. Unlike sub and gsub, the modified string is returned as the result of the function and the original target string is *not* changed. If *how* is a string beginning with 'g' or 'G', then it replaces all matches of *regexp* with *replacement*. Otherwise, *how* is treated as a number that indicates which match of *regexp* to replace. If no *target* is supplied, $0 is used.

gensub provides an additional feature that is not available in sub or gsub: the ability to specify components of a regexp in the replacement text. This is done by using parentheses in the regexp to mark the components and then specifying '*N*' in the replacement text, where *N* is a digit from 1 to 9. For example:

```
$ gawk ’
> BEGIN {
>       a = "abc def"
>       b = gensub(/(.+) (.+)/, "\\2 \\1", "g", a)
>       print b
> }’
 ⊣ def abc
```

As with sub, you must type two backslashes in order to get one into the string. In the replacement text, the sequence '\0' represents the entire matched text, as does the character '&'.

The following example shows how you can use the third argument to control which match of the regexp should be changed:

```
$ echo a b c a b c |
> gawk ’{ print gensub(/a/, "AA", 2) }’
 ⊣ a b c AA b c
```

In this case, $0 is used as the default target string. gensub returns the new string as its result, which is passed directly to print for printing.

If the *how* argument is a string that does not begin with 'g' or 'G', or if it is a number that is less than or equal to zero, only one substitution is performed. If *how* is zero, gawk issues a warning message.

If *regexp* does not match *target*, gensub's return value is the original unchanged value of *target*.

gensub is a gawk extension; it is not available in compatibility mode (see Section 11.2 [Command-Line Options], page 173).

`substr(`*string*`, `*start*` [, `*length*`])`
: This returns a *length*-character-long substring of *string*, starting at character number *start*. The first character of a string is character number one.[5] For example, `substr("washington", 5, 3)` returns `"ing"`.

  If *length* is not present, this function returns the whole suffix of *string* that begins at character number *start*. For example, `substr("washington", 5)` returns `"ington"`. The whole suffix is also returned if *length* is greater than the number of characters remaining in the string, counting from character *start*.

  If *start* is less than one, `substr` treats it as if it was one. (POSIX doesn't specify what to do in this case: Unix `awk` acts this way, and therefore `gawk` does too.) If *start* is greater than the number of characters in the string, `substr` returns the null string. Similarly, if *length* is present but less than or equal to zero, the null string is returned.

  The string returned by `substr` *cannot* be assigned. Thus, it is a mistake to attempt to change a portion of a string, as shown in the following example:

  ```
  string = "abcdef"
  # try to get "abCDEf", won't work
  substr(string, 3, 3) = "CDE"
  ```

  It is also a mistake to use `substr` as the third argument of `sub` or `gsub`:

  ```
  gsub(/xyz/, "pdq", substr($0, 5, 20))  # WRONG
  ```

  (Some commercial versions of `awk` do in fact let you use `substr` this way, but doing so is not portable.)

  If you need to replace bits and pieces of a string, combine `substr` with string concatenation, in the following manner:

  ```
  string = "abcdef"
  ...
  string = substr(string, 1, 2) "CDE" substr(string, 6)
  ```

`tolower(`*string*`)`
: This returns a copy of *string*, with each uppercase character in the string replaced with its corresponding lowercase character. Nonalphabetic characters are left unchanged. For example, `tolower("MiXeD cAsE 123")` returns `"mixed case 123"`.

`toupper(`*string*`)`
: This returns a copy of *string*, with each lowercase character in the string replaced with its corresponding uppercase character. Nonalphabetic characters are left unchanged. For example, `toupper("MiXeD cAsE 123")` returns `"MIXED CASE 123"`.

8.1.3.1 More About '\' and '&' with `sub`, `gsub`, and `gensub`

When using `sub`, `gsub`, or `gensub`, and trying to get literal backslashes and ampersands into the replacement text, you need to remember that there are several levels of *escape processing* going on.

[5] This is different from C and C++, in which the first character is number zero.

First, there is the *lexical* level, which is when `awk` reads your program and builds an internal copy of it that can be executed. Then there is the runtime level, which is when `awk` actually scans the replacement string to determine what to generate.

At both levels, `awk` looks for a defined set of characters that can come after a backslash. At the lexical level, it looks for the escape sequences listed in Section 2.2 [Escape Sequences], page 25. Thus, for every '\' that `awk` processes at the runtime level, type two backslashes at the lexical level. When a character that is not valid for an escape sequence follows the '\', Unix `awk` and `gawk` both simply remove the initial '\' and put the next character into the string. Thus, for example, `"a\qb"` is treated as `"aqb"`.

At the runtime level, the various functions handle sequences of '\' and '`&`' differently. The situation is (sadly) somewhat complex. Historically, the `sub` and `gsub` functions treated the two character sequence '`\&`' specially; this sequence was replaced in the generated text with a single '`&`'. Any other '\' within the *replacement* string that did not precede an '`&`' was passed through unchanged. This is illustrated in Table 8.1.

You type	`sub` sees	`sub` generates
`\&`	`&`	the matched text
`\\&`	`\&`	a literal '`&`'
`\\\&`	`\&`	a literal '`&`'
`\\\\&`	`\\&`	a literal '`\&`'
`\\\\\&`	`\\&`	a literal '`\&`'
`\\\\\\&`	`\\\&`	a literal '`\\&`'
`\\q`	`\q`	a literal '`\q`'

Table 8.1: Historical Escape Sequence Processing for sub and gsub

This table shows both the lexical-level processing, where an odd number of backslashes becomes an even number at the runtime level, as well as the runtime processing done by `sub`. (For the sake of simplicity, the rest of the following tables only show the case of even numbers of backslashes entered at the lexical level.)

The problem with the historical approach is that there is no way to get a literal '\' followed by the matched text.

The 1992 POSIX standard attempted to fix this problem. That standard says that `sub` and `gsub` look for either a '\' or an '`&`' after the '\'. If either one follows a '\', that character is output literally. The interpretation of '\' and '`&`' then becomes as shown in Table 8.2.

You type	`sub` sees	`sub` generates
`&`	`&`	the matched text
`\\&`	`\&`	a literal '`&`'
`\\\\&`	`\\&`	a literal '`\`', then the matched text
`\\\\\\&`	`\\\&`	a literal '`\&`'

Table 8.2: 1992 POSIX Rules for sub and gsub Escape Sequence Processing

This appears to solve the problem. Unfortunately, the phrasing of the standard is unusual. It says, in effect, that '`\`' turns off the special meaning of any following character, but for anything other than '`\`' and '`&`', such special meaning is undefined. This wording leads to two problems:

- Backslashes must now be doubled in the *replacement* string, breaking historical `awk` programs.
- To make sure that an `awk` program is portable, *every* character in the *replacement* string must be preceded with a backslash.[6]

Because of the problems just listed, in 1996, the `gawk` maintainer submitted proposed text for a revised standard that reverts to rules that correspond more closely to the original existing practice. The proposed rules have special cases that make it possible to produce a '`\`' preceding the matched text. This is shown in Table 8.3.

You type	`sub` sees	`sub` generates
`\\\\\\&`	`\\\&`	a literal '`\&`'
`\\\\&`	`\\&`	a literal '`\`', followed by the matched text
`\\&`	`\&`	a literal '`&`'
`\\q`	`\q`	a literal '`\q`'
`\\\\`	`\\`	`\\`

Table 8.3: Propsosed rules for sub and backslash

In a nutshell, at the runtime level, there are now three special sequences of characters ('`\\\&`', '`\\&`' and '`\&`') whereas historically there was only one. However, as in the historical case, any '`\`' that is not part of one of these three sequences is not special and appears in the output literally.

`gawk` 3.0 and 3.1 follow these proposed POSIX rules for `sub` and `gsub`. The POSIX standard took much longer to be revised than was expected in 1996. The 2001 standard does not follow the above rules. Instead, the rules there are somewhat simpler. The results are similar except for one case.

The 2001 POSIX rules state that '`\&`' in the replacement string produces a literal '`&`', '`\\`' produces a literal '`\`', and '`\`' followed by anything else is not special; the '`\`' is placed straight into the output. These rules are presented in Table 8.4.

[6] This consequence was certainly unintended.

You type	`sub` sees	`sub` generates
`\\\\\\&`	`\\\&`	a literal '`\&`'
`\\\\&`	`\\&`	a literal '`\`', followed by the matched text
`\\&`	`\&`	a literal '`&`'
`\\q`	`\q`	a literal '`\q`'
`\\\\`	`\\`	`\`

Table 8.4: POSIX 2001 rules for sub

The only case where the difference is noticeable is the last one: '`\\\\`' is seen as '`\\`' and produces '`\`' instead of '`\\`'.

Starting with version 3.1.4, `gawk` follows the POSIX rules when '`--posix`' is specified (see Section 11.2 [Command-Line Options], page 173). Otherwise, it continues to follow the 1996 proposed rules, since, as of this writing, that has been its behavior for over seven years.

> **NOTE:** At the next major release, `gawk` will switch to using the POSIX 2001 rules by default.

The rules for `gensub` are considerably simpler. At the runtime level, whenever `gawk` sees a '`\`', if the following character is a digit, then the text that matched the corresponding parenthesized subexpression is placed in the generated output. Otherwise, no matter what character follows the '`\`', it appears in the generated text and the '`\`' does not, as shown in Table 8.5.

You type	`gensub` sees	`gensub` generates
`&`	`&`	the matched text
`\\&`	`\&`	a literal '`&`'
`\\\\`	`\\`	a literal '`\`'
`\\\\&`	`\\&`	a literal '`\`', then the matched text
`\\\\\\&`	`\\\&`	a literal '`\&`'
`\\q`	`\q`	a literal '`q`'

Table 8.5: Escape Sequence Processing for gensub

Because of the complexity of the lexical and runtime level processing and the special cases for `sub` and `gsub`, we recommend the use of `gawk` and `gensub` when you have to do substitutions.

Advanced Notes: Matching the Null String

In `awk`, the '`*`' operator can match the null string. This is particularly important for the `sub`, `gsub`, and `gensub` functions. For example:

```
$ echo abc | awk '{ gsub(/m*/, "X"); print }'
 ⊣ XaXbXcX
```

Although this makes a certain amount of sense, it can be surprising.

8.1.4 Input/Output Functions

The following functions relate to input/output (I/O). Optional parameters are enclosed in square brackets ([ ]):

`close(`*filename* [`,` *how*]`)`
: Close the file *filename* for input or output. Alternatively, the argument may be a shell command that was used for creating a coprocess, or for redirecting to or from a pipe; then the coprocess or pipe is closed. See Section 4.8 [Closing Input and Output Redirections], page 70, for more information.

  When closing a coprocess, it is occasionally useful to first close one end of the two-way pipe and then to close the other. This is done by providing a second argument to `close`. This second argument should be one of the two string values `"to"` or `"from"`, indicating which end of the pipe to close. Case in the string does not matter. See Section 10.2 [Two-Way Communications with Another Process], page 166, which discusses this feature in more detail and gives an example.

`fflush(`[*filename*]`)`
: Flush any buffered output associated with *filename*, which is either a file opened for writing or a shell command for redirecting output to a pipe or coprocess.

  Many utility programs *buffer* their output; i.e., they save information to write to a disk file or terminal in memory until there is enough for it to be worthwhile to send the data to the output device. This is often more efficient than writing every little bit of information as soon as it is ready. However, sometimes it is necessary to force a program to *flush* its buffers; that is, write the information to its destination, even if a buffer is not full. This is the purpose of the `fflush` function—`gawk` also buffers its output and the `fflush` function forces `gawk` to flush its buffers.

  `fflush` was added to the Bell Laboratories research version of `awk` in 1994; it is not part of the POSIX standard and is not available if '`--posix`' has been specified on the command line (see Section 11.2 [Command-Line Options], page 173).

  `gawk` extends the `fflush` function in two ways. The first is to allow no argument at all. In this case, the buffer for the standard output is flushed. The second is to allow the null string (`""`) as the argument. In this case, the buffers for *all* open output files and pipes are flushed.

  `fflush` returns zero if the buffer is successfully flushed; otherwise, it returns -1. In the case where all buffers are flushed, the return value is zero only if all buffers were flushed successfully. Otherwise, it is -1, and `gawk` warns about the problem *filename*.

  `gawk` also issues a warning message if you attempt to flush a file or pipe that was opened for reading (such as with `getline`), or if *filename* is not an open file, pipe, or coprocess. In such a case, `fflush` returns -1, as well.

`system(`*command*`)`

Executes operating-system commands and then returns to the `awk` program. The `system` function executes the command given by the string *command*. It returns the status returned by the command that was executed as its value.

For example, if the following fragment of code is put in your `awk` program:

```
END {
     system("date | mail -s 'awk run done' root")
}
```

the system administrator is sent mail when the `awk` program finishes processing input and begins its end-of-input processing.

Note that redirecting `print` or `printf` into a pipe is often enough to accomplish your task. If you need to run many commands, it is more efficient to simply print them down a pipeline to the shell:

```
while (more stuff to do)
    print command | "/bin/sh"
close("/bin/sh")
```

However, if your `awk` program is interactive, `system` is useful for cranking up large self-contained programs, such as a shell or an editor. Some operating systems cannot implement the `system` function. `system` causes a fatal error if it is not supported.

Advanced Notes: Interactive Versus Noninteractive Buffering

As a side point, buffering issues can be even more confusing, depending upon whether your program is *interactive*, i.e., communicating with a user sitting at a keyboard.[7]

Interactive programs generally *line buffer* their output; i.e., they write out every line. Noninteractive programs wait until they have a full buffer, which may be many lines of output. Here is an example of the difference:

```
$ awk '{ print $1 + $2 }'
1 1
⊣ 2
2 3
⊣ 5
Ctrl-d
```

Each line of output is printed immediately. Compare that behavior with this example:

```
$ awk '{ print $1 + $2 }' | cat
1 1
2 3
Ctrl-d
⊣ 2
⊣ 5
```

Here, no output is printed until after the *Ctrl-d* is typed, because it is all buffered and sent down the pipe to `cat` in one shot.

[7] A program is interactive if the standard output is connected to a terminal device.

Advanced Notes: Controlling Output Buffering with `system`

The `fflush` function provides explicit control over output buffering for individual files and pipes. However, its use is not portable to many other `awk` implementations. An alternative method to flush output buffers is to call `system` with a null string as its argument:

```
system("")   # flush output
```

`gawk` treats this use of the `system` function as a special case and is smart enough not to run a shell (or other command interpreter) with the empty command. Therefore, with `gawk`, this idiom is not only useful, it is also efficient. While this method should work with other `awk` implementations, it does not necessarily avoid starting an unnecessary shell. (Other implementations may only flush the buffer associated with the standard output and not necessarily all buffered output.)

If you think about what a programmer expects, it makes sense that `system` should flush any pending output. The following program:

```
BEGIN {
     print "first print"
     system("echo system echo")
     print "second print"
}
```

must print:

```
first print
system echo
second print
```

and not:

```
system echo
first print
second print
```

If `awk` did not flush its buffers before calling `system`, you would see the latter (undesirable) output.

8.1.5 Using `gawk`'s Timestamp Functions

`awk` programs are commonly used to process log files containing timestamp information, indicating when a particular log record was written. Many programs log their timestamp in the form returned by the `time` system call, which is the number of seconds since a particular epoch. On POSIX-compliant systems, it is the number of seconds since 1970-01-01 00:00:00 UTC, not counting leap seconds.[8] All known POSIX-compliant systems support timestamps from 0 through $2^31 - 1$, which is sufficient to represent times through 2038-01-19 03:14:07 UTC. Many systems support a wider range of timestamps, including negative timestamps that represent times before the epoch.

In order to make it easier to process such log files and to produce useful reports, `gawk` provides the following functions for working with timestamps. They are `gawk` extensions;

[8] See [Glossary], page 299, especially the entries "Epoch" and "UTC."

they are not specified in the POSIX standard, nor are they in any other known version of `awk`.[9] Optional parameters are enclosed in square brackets ([ ]):

`systime()`
: This function returns the current time as the number of seconds since the system epoch. On POSIX systems, this is the number of seconds since 1970-01-01 00:00:00 UTC, not counting leap seconds. It may be a different number on other systems.

`mktime(`*`datespec`*`)`
: This function turns *datespec* into a timestamp in the same form as is returned by `systime`. It is similar to the function of the same name in ISO C. The argument, *datespec*, is a string of the form `"`*`YYYY MM DD HH MM SS [DST]`*`"`. The string consists of six or seven numbers representing, respectively, the full year including century, the month from 1 to 12, the day of the month from 1 to 31, the hour of the day from 0 to 23, the minute from 0 to 59, the second from 0 to 60,[10] and an optional daylight-savings flag.

  The values of these numbers need not be within the ranges specified; for example, an hour of -1 means 1 hour before midnight. The origin-zero Gregorian calendar is assumed, with year 0 preceding year 1 and year -1 preceding year 0. The time is assumed to be in the local timezone. If the daylight-savings flag is positive, the time is assumed to be daylight savings time; if zero, the time is assumed to be standard time; and if negative (the default), `mktime` attempts to determine whether daylight savings time is in effect for the specified time.

  If *datespec* does not contain enough elements or if the resulting time is out of range, `mktime` returns -1.

`strftime(`[*`format`* [`,` *`timestamp`*]]`)`
: This function returns a string. It is similar to the function of the same name in ISO C. The time specified by *timestamp* is used to produce a string, based on the contents of the *format* string. The *timestamp* is in the same format as the value returned by the `systime` function. If no *timestamp* argument is supplied, `gawk` uses the current time of day as the timestamp. If no *format* argument is supplied, `strftime` uses `"%a %b %d %H:%M:%S %Z %Y"`. This format string produces output that is (almost) equivalent to that of the `date` utility. (Versions of `gawk` prior to 3.0 require the *format* argument.)

The `systime` function allows you to compare a timestamp from a log file with the current time of day. In particular, it is easy to determine how long ago a particular record was logged. It also allows you to produce log records using the "seconds since the epoch" format.

The `mktime` function allows you to convert a textual representation of a date and time into a timestamp. This makes it easy to do before/after comparisons of dates and times, particularly when dealing with date and time data coming from an external source, such as a log file.

---

[9] The GNU `date` utility can also do many of the things described here. Its use may be preferable for simple time-related operations in shell scripts.

[10] Occasionally there are minutes in a year with a leap second, which is why the seconds can go up to 60.

The `strftime` function allows you to easily turn a timestamp into human-readable information. It is similar in nature to the `sprintf` function (see Section 8.1.3 [String-Manipulation Functions], page 129), in that it copies nonformat specification characters verbatim to the returned string, while substituting date and time values for format specifications in the *format* string.

`strftime` is guaranteed by the 1999 ISO C standard[11] to support the following date format specifications:

`%a` The locale's abbreviated weekday name.

`%A` The locale's full weekday name.

`%b` The locale's abbreviated month name.

`%B` The locale's full month name.

`%c` The locale's "appropriate" date and time representation. (This is '`%A %B %d %T %Y`' in the `"C"` locale.)

`%C` The century. This is the year divided by 100 and truncated to the next lower integer.

`%d` The day of the month as a decimal number (01–31).

`%D` Equivalent to specifying '`%m/%d/%y`'.

`%e` The day of the month, padded with a space if it is only one digit.

`%F` Equivalent to specifying '`%Y-%m-%d`'. This is the ISO 8601 date format.

`%g` The year modulo 100 of the ISO week number, as a decimal number (00–99). For example, January 1, 1993 is in week 53 of 1992. Thus, the year of its ISO week number is 1992, even though its year is 1993. Similarly, December 31, 1973 is in week 1 of 1974. Thus, the year of its ISO week number is 1974, even though its year is 1973.

`%G` The full year of the ISO week number, as a decimal number.

`%h` Equivalent to '`%b`'.

`%H` The hour (24-hour clock) as a decimal number (00–23).

`%I` The hour (12-hour clock) as a decimal number (01–12).

`%j` The day of the year as a decimal number (001–366).

`%m` The month as a decimal number (01–12).

`%M` The minute as a decimal number (00–59).

`%n` A newline character (ASCII LF).

`%p` The locale's equivalent of the AM/PM designations associated with a 12-hour clock.

`%r` The locale's 12-hour clock time. (This is '`%I:%M:%S %p`' in the `"C"` locale.)

[11] As this is a recent standard, not every system's `strftime` necessarily supports all of the conversions listed here.

`%R` Equivalent to specifying '`%H:%M`'.

`%S` The second as a decimal number (00–60).

`%t` A TAB character.

`%T` Equivalent to specifying '`%H:%M:%S`'.

`%u` The weekday as a decimal number (1–7). Monday is day one.

`%U` The week number of the year (the first Sunday as the first day of week one) as a decimal number (00–53).

`%V` The week number of the year (the first Monday as the first day of week one) as a decimal number (01–53). The method for determining the week number is as specified by ISO 8601. (To wit: if the week containing January 1 has four or more days in the new year, then it is week one; otherwise it is week 53 of the previous year and the next week is week one.)

`%w` The weekday as a decimal number (0–6). Sunday is day zero.

`%W` The week number of the year (the first Monday as the first day of week one) as a decimal number (00–53).

`%x` The locale's "appropriate" date representation. (This is '`%A %B %d %Y`' in the `"C"` locale.)

`%X` The locale's "appropriate" time representation. (This is '`%T`' in the `"C"` locale.)

`%y` The year modulo 100 as a decimal number (00–99).

`%Y` The full year as a decimal number (e.g., 1995).

`%z` The timezone offset in a +HHMM format (e.g., the format necessary to produce RFC 822/RFC 1036 date headers).

`%Z` The time zone name or abbreviation; no characters if no time zone is determinable.

`%Ec %EC %Ex %EX %Ey %EY %Od %Oe %OH`
`%OI %Om %OM %OS %Ou %OU %OV %Ow %OW %Oy`
"Alternate representations" for the specifications that use only the second letter ('`%c`', '`%C`', and so on).[12] (These facilitate compliance with the POSIX `date` utility.)

`%%` A literal '`%`'.

If a conversion specifier is not one of the above, the behavior is undefined.[13]

Informally, a *locale* is the geographic place in which a program is meant to run. For example, a common way to abbreviate the date September 4, 1991 in the United States

[12] If you don't understand any of this, don't worry about it; these facilities are meant to make it easier to "internationalize" programs. Other internationalization features are described in Chapter 9 [Internationalization with `gawk`], page 156.

[13] This is because ISO C leaves the behavior of the C version of `strftime` undefined and `gawk` uses the system's version of `strftime` if it's there. Typically, the conversion specifier either does not appear in the returned string or appears literally.

is "9/4/91." In many countries in Europe, however, it is abbreviated "4.9.91." Thus, the '`%x`' specification in a `"US"` locale might produce '`9/4/91`', while in a `"EUROPE"` locale, it might produce '`4.9.91`'. The ISO C standard defines a default `"C"` locale, which is an environment that is typical of what most C programmers are used to.

A public-domain C version of `strftime` is supplied with `gawk` for systems that are not yet fully standards-compliant. It supports all of the just listed format specifications. If that version is used to compile `gawk` (see Appendix B [Installing `gawk`], page 260), then the following additional format specifications are available:

`%k` The hour (24-hour clock) as a decimal number (0–23). Single-digit numbers are padded with a space.

`%l` The hour (12-hour clock) as a decimal number (1–12). Single-digit numbers are padded with a space.

`%N` The "Emperor/Era" name. Equivalent to `%C`.

`%o` The "Emperor/Era" year. Equivalent to `%y`.

`%s` The time as a decimal timestamp in seconds since the epoch.

`%v` The date in VMS format (e.g., '`20-JUN-1991`').

Additionally, the alternate representations are recognized but their normal representations are used.

This example is an `awk` implementation of the POSIX `date` utility. Normally, the `date` utility prints the current date and time of day in a well-known format. However, if you provide an argument to it that begins with a '`+`', `date` copies nonformat specifier characters to the standard output and interprets the current time according to the format specifiers in the string. For example:

```
$ date '+Today is %A, %B %d, %Y.'
⊣ Today is Thursday, September 14, 2000.
```

Here is the `gawk` version of the `date` utility. It has a shell "wrapper" to handle the '`-u`' option, which requires that `date` run as if the time zone is set to UTC:

```
#! /bin/sh
#
# date --- approximate the P1003.2 'date' command

case $1 in
-u)  TZ=UTC0     # use UTC
     export TZ
     shift ;;
esac

gawk 'BEGIN  {
    format = "%a %b %d %H:%M:%S %Z %Y"
    exitval = 0

    if (ARGC > 2)
        exitval = 1
```

```
    else if (ARGC == 2) {
        format = ARGV[1]
        if (format ~ /^\+/)
            format = substr(format, 2)   # remove leading +
    }
    print strftime(format)
    exit exitval
}' "$@"
```

8.1.6 Bit-Manipulation Functions of `gawk`

I can explain it for you, but I can't understand it for you.
Anonymous

Many languages provide the ability to perform *bitwise* operations on two integer numbers. In other words, the operation is performed on each successive pair of bits in the operands. Three common operations are bitwise AND, OR, and XOR. The operations are described in Table 8.6.

	Bit operator					
	AND		OR		XOR	
Operands	0	1	0	1	0	1
0	0	0	0	1	0	1
1	0	1	1	1	1	0

Table 8.6: Bitwise Operations

As you can see, the result of an AND operation is 1 only when *both* bits are 1. The result of an OR operation is 1 if *either* bit is 1. The result of an XOR operation is 1 if either bit is 1, but not both. The next operation is the *complement*; the complement of 1 is 0 and the complement of 0 is 1. Thus, this operation "flips" all the bits of a given value.

Finally, two other common operations are to shift the bits left or right. For example, if you have a bit string '`10111001`' and you shift it right by three bits, you end up with '`00010111`'.[14] If you start over again with '`10111001`' and shift it left by three bits, you end up with '`11001000`'. `gawk` provides built-in functions that implement the bitwise operations just described. They are:

`and(`*v1*`, `*v2*`)` — Returns the bitwise AND of the values provided by *v1* and *v2*.

`or(`*v1*`, `*v2*`)` — Returns the bitwise OR of the values provided by *v1* and *v2*.

`xor(`*v1*`, `*v2*`)` — Returns the bitwise XOR of the values provided by *v1* and *v2*.

[14] This example shows that 0's come in on the left side. For `gawk`, this is always true, but in some languages, it's possible to have the left side fill with 1's. Caveat emptor.

`compl(`*val*`)` Returns the bitwise complement of *val*.

`lshift(`*val*`, `*count*`)` Returns the value of *val*, shifted left by *count* bits.

`rshift(`*val*`, `*count*`)` Returns the value of *val*, shifted right by *count* bits.

For all of these functions, first the double-precision floating-point value is converted to the widest C unsigned integer type, then the bitwise operation is performed. If the result cannot be represented exactly as a C `double`, leading nonzero bits are removed one by one until it can be represented exactly. The result is then converted back into a C `double`. (If you don't understand this paragraph, don't worry about it.)

Here is a user-defined function (see Section 8.2 [User-Defined Functions], page 149) that illustrates the use of these functions:

```
# bits2str --- turn a byte into readable 1's and 0's

function bits2str(bits,        data, mask)
{
    if (bits == 0)
        return "0"

    mask = 1
    for (; bits != 0; bits = rshift(bits, 1))
        data = (and(bits, mask) ? "1" : "0") data

    while ((length(data) % 8) != 0)
        data = "0" data

    return data
}


BEGIN {
    printf "123 = %s\n", bits2str(123)
    printf "0123 = %s\n", bits2str(0123)
    printf "0x99 = %s\n", bits2str(0x99)
    comp = compl(0x99)
    printf "compl(0x99) = %#x = %s\n", comp, bits2str(comp)
    shift = lshift(0x99, 2)
    printf "lshift(0x99, 2) = %#x = %s\n", shift, bits2str(shift)
    shift = rshift(0x99, 2)
    printf "rshift(0x99, 2) = %#x = %s\n", shift, bits2str(shift)
}
```

This program produces the following output when run:

```
$ gawk -f testbits.awk
⊣ 123 = 01111011
⊣ 0123 = 01010011
⊣ 0x99 = 10011001
⊣ compl(0x99) = 0xffffff66 = 11111111111111111111111101100110
⊣ lshift(0x99, 2) = 0x264 = 0000001001100100
⊣ rshift(0x99, 2) = 0x26 = 00100110
```

The `bits2str` function turns a binary number into a string. The number `1` represents a binary value where the rightmost bit is set to 1. Using this mask, the function repeatedly checks the rightmost bit. ANDing the mask with the value indicates whether the rightmost bit is 1 or not. If so, a `"1"` is concatenated onto the front of the string. Otherwise, a `"0"`

is added. The value is then shifted right by one bit and the loop continues until there are no more 1 bits.

If the initial value is zero it returns a simple `"0"`. Otherwise, at the end, it pads the value with zeros to represent multiples of 8-bit quantities. This is typical in modern computers.

The main code in the `BEGIN` rule shows the difference between the decimal and octal values for the same numbers (see Section 5.1.2 [Octal and Hexadecimal Numbers], page 73), and then demonstrates the results of the `compl`, `lshift`, and `rshift` functions.

8.1.7 Using gawk's String-Translation Functions

`gawk` provides facilities for internationalizing `awk` programs. These include the functions described in the following list. The descriptions here are purposely brief. See Chapter 9 [Internationalization with `gawk`], page 156, for the full story. Optional parameters are enclosed in square brackets ([ ]):

`dcgettext(`*`string`* [`,` *`domain`* [`,` *`category`*]])
: This function returns the translation of *string* in text domain *domain* for locale category *category*. The default value for *domain* is the current value of `TEXTDOMAIN`. The default value for *category* is `"LC_MESSAGES"`.

`dcngettext(`*`string1`*`,` *`string2`*`,` *`number`* [`,` *`domain`* [`,` *`category`*]])
: This function returns the plural form used for *number* of the translation of *string1* and *string2* in text domain *domain* for locale category *category*. *string1* is the English singular variant of a message, and *string2* the English plural variant of the same message. The default value for *domain* is the current value of `TEXTDOMAIN`. The default value for *category* is `"LC_MESSAGES"`.

`bindtextdomain(`*`directory`* [`,` *`domain`*])
: This function allows you to specify the directory in which `gawk` will look for message translation files, in case they will not or cannot be placed in the "standard" locations (e.g., during testing). It returns the directory in which *domain* is "bound."

  The default *domain* is the value of `TEXTDOMAIN`. If *directory* is the null string (`""`), then `bindtextdomain` returns the current binding for the given *domain*.

8.2 User-Defined Functions

Complicated `awk` programs can often be simplified by defining your own functions. User-defined functions can be called just like built-in ones (see Section 5.13 [Function Calls], page 89), but it is up to you to define them, i.e., to tell `awk` what they should do.

8.2.1 Function Definition Syntax

Definitions of functions can appear anywhere between the rules of an `awk` program. Thus, the general form of an `awk` program is extended to include sequences of rules *and* user-defined function definitions. There is no need to put the definition of a function before all uses of the function. This is because `awk` reads the entire program before starting to execute any of it.

The definition of a function named *name* looks like this:

```
function name(parameter-list)
{
     body-of-function
}
```

name is the name of the function to define. A valid function name is like a valid variable name: a sequence of letters, digits, and underscores that doesn't start with a digit. Within a single `awk` program, any particular name can only be used as a variable, array, or function.

parameter-list is a list of the function's arguments and local variable names, separated by commas. When the function is called, the argument names are used to hold the argument values given in the call. The local variables are initialized to the empty string. A function cannot have two parameters with the same name, nor may it have a parameter with the same name as the function itself.

The *body-of-function* consists of `awk` statements. It is the most important part of the definition, because it says what the function should actually *do*. The argument names exist to give the body a way to talk about the arguments; local variables exist to give the body places to keep temporary values.

Argument names are not distinguished syntactically from local variable names. Instead, the number of arguments supplied when the function is called determines how many argument variables there are. Thus, if three argument values are given, the first three names in *parameter-list* are arguments and the rest are local variables.

It follows that if the number of arguments is not the same in all calls to the function, some of the names in *parameter-list* may be arguments on some occasions and local variables on others. Another way to think of this is that omitted arguments default to the null string.

Usually when you write a function, you know how many names you intend to use for arguments and how many you intend to use as local variables. It is conventional to place some extra space between the arguments and the local variables, in order to document how your function is supposed to be used.

During execution of the function body, the arguments and local variable values hide, or *shadow*, any variables of the same names used in the rest of the program. The shadowed variables are not accessible in the function definition, because there is no way to name them while their names have been taken away for the local variables. All other variables used in the `awk` program can be referenced or set normally in the function's body.

The arguments and local variables last only as long as the function body is executing. Once the body finishes, you can once again access the variables that were shadowed while the function was running.

The function body can contain expressions that call functions. They can even call this function, either directly or by way of another function. When this happens, we say the function is *recursive*. The act of a function calling itself is called *recursion*.

In many `awk` implementations, including `gawk`, the keyword `function` may be abbreviated `func`. However, POSIX only specifies the use of the keyword `function`. This actually has some practical implications. If `gawk` is in POSIX-compatibility mode (see Section 11.2 [Command-Line Options], page 173), then the following statement does *not* define a function:

```
func foo() { a = sqrt($1) ; print a }
```

Instead it defines a rule that, for each record, concatenates the value of the variable '`func`' with the return value of the function '`foo`'. If the resulting string is non-null, the action is executed. This is probably not what is desired. (`awk` accepts this input as syntactically valid, because functions may be used before they are defined in `awk` programs.)

To ensure that your `awk` programs are portable, always use the keyword `function` when defining a function.

8.2.2 Function Definition Examples

Here is an example of a user-defined function, called `myprint`, that takes a number and prints it in a specific format:

```
function myprint(num)
{
     printf "%6.3g\n", num
}
```

To illustrate, here is an `awk` rule that uses our `myprint` function:

```
$3 > 0     { myprint($3) }
```

This program prints, in our special format, all the third fields that contain a positive number in our input. Therefore, when given the following:

```
 1.2   3.4    5.6   7.8
 9.10 11.12 -13.14 15.16
17.18 19.20  21.22 23.24
```

this program, using our function to format the results, prints:

```
   5.6
  21.2
```

This function deletes all the elements in an array:

```
function delarray(a,    i)
{
    for (i in a)
       delete a[i]
}
```

When working with arrays, it is often necessary to delete all the elements in an array and start over with a new list of elements (see Section 7.6 [The `delete` Statement], page 120). Instead of having to repeat this loop everywhere that you need to clear out an array, your program can just call `delarray`. (This guarantees portability. The use of '`delete array`' to delete the contents of an entire array is a nonstandard extension.)

The following is an example of a recursive function. It takes a string as an input parameter and returns the string in backwards order. Recursive functions must always have a test that stops the recursion. In this case, the recursion terminates when the starting position is zero, i.e., when there are no more characters left in the string.

```
function rev(str, start)
{
    if (start == 0)
        return ""
```

```
    return (substr(str, start, 1) rev(str, start - 1))
}
```

If this function is in a file named 'rev.awk', it can be tested this way:

```
$ echo "Don't Panic!" |
> gawk --source '{ print rev($0, length($0)) }' -f rev.awk
⊣ !cinaP t'noD
```

The C `ctime` function takes a timestamp and returns it in a string, formatted in a well-known fashion. The following example uses the built-in `strftime` function (see Section 8.1.5 [Using gawk's Timestamp Functions], page 142) to create an `awk` version of `ctime`:

```
# ctime.awk
#
# awk version of C ctime(3) function

function ctime(ts,    format)
{
    format = "%a %b %d %H:%M:%S %Z %Y"
    if (ts == 0)
        ts = systime()       # use current time as default
    return strftime(format, ts)
}
```

8.2.3 Calling User-Defined Functions

Calling a function means causing the function to run and do its job. A function call is an expression and its value is the value returned by the function.

A function call consists of the function name followed by the arguments in parentheses. `awk` expressions are what you write in the call for the arguments. Each time the call is executed, these expressions are evaluated, and the values are the actual arguments. For example, here is a call to `foo` with three arguments (the first being a string concatenation):

```
foo(x y, "lose", 4 * z)
```

Caution: Whitespace characters (spaces and tabs) are not allowed between the function name and the open-parenthesis of the argument list. If you write whitespace by mistake, `awk` might think that you mean to concatenate a variable with an expression in parentheses. However, it notices that you used a function name and not a variable name, and reports an error.

When a function is called, it is given a *copy* of the values of its arguments. This is known as *call by value*. The caller may use a variable as the expression for the argument, but the called function does not know this—it only knows what value the argument had. For example, if you write the following code:

```
foo = "bar"
z = myfunc(foo)
```

then you should not think of the argument to `myfunc` as being "the variable `foo`." Instead, think of the argument as the string value `"bar"`. If the function `myfunc` alters the values of its local variables, this has no effect on any other variables. Thus, if `myfunc` does this:

```
function myfunc(str)
```

```
{
  print str
  str = "zzz"
  print str
}
```

to change its first argument variable `str`, it does *not* change the value of `foo` in the caller. The role of `foo` in calling `myfunc` ended when its value (`"bar"`) was computed. If `str` also exists outside of `myfunc`, the function body cannot alter this outer value, because it is shadowed during the execution of `myfunc` and cannot be seen or changed from there.

However, when arrays are the parameters to functions, they are *not* copied. Instead, the array itself is made available for direct manipulation by the function. This is usually called *call by reference*. Changes made to an array parameter inside the body of a function *are* visible outside that function.

> **NOTE:** Changing an array parameter inside a function can be very dangerous if you do not watch what you are doing. For example:
>
> ```
> function changeit(array, ind, nvalue)
> {
>      array[ind] = nvalue
> }
>
> BEGIN {
>     a[1] = 1; a[2] = 2; a[3] = 3
>     changeit(a, 2, "two")
>     printf "a[1] = %s, a[2] = %s, a[3] = %s\n",
>             a[1], a[2], a[3]
> }
> ```
>
> prints '`a[1] = 1, a[2] = two, a[3] = 3`', because `changeit` stores `"two"` in the second element of `a`.

Some `awk` implementations allow you to call a function that has not been defined. They only report a problem at runtime when the program actually tries to call the function. For example:

```
BEGIN {
    if (0)
        foo()
    else
        bar()
}
function bar() { ... }
# note that 'foo' is not defined
```

Because the '`if`' statement will never be true, it is not really a problem that `foo` has not been defined. Usually, though, it is a problem if a program calls an undefined function.

If '`--lint`' is specified (see Section 11.2 [Command-Line Options], page 173), `gawk` reports calls to undefined functions.

Some `awk` implementations generate a runtime error if you use the `next` statement (see Section 6.4.8 [The `next` Statement], page 105) inside a user-defined function. `gawk` does not have this limitation.

8.2.4 The `return` Statement

The body of a user-defined function can contain a `return` statement. This statement returns control to the calling part of the `awk` program. It can also be used to return a value for use in the rest of the `awk` program. It looks like this:

```
return [expression]
```

The *expression* part is optional. If it is omitted, then the returned value is undefined, and therefore, unpredictable.

A `return` statement with no value expression is assumed at the end of every function definition. So if control reaches the end of the function body, then the function returns an unpredictable value. `awk` does *not* warn you if you use the return value of such a function.

Sometimes, you want to write a function for what it does, not for what it returns. Such a function corresponds to a `void` function in C or to a `procedure` in Pascal. Thus, it may be appropriate to not return any value; simply bear in mind that if you use the return value of such a function, you do so at your own risk.

The following is an example of a user-defined function that returns a value for the largest number among the elements of an array:

```
function maxelt(vec,   i, ret)
{
     for (i in vec) {
          if (ret == "" || vec[i] > ret)
               ret = vec[i]
     }
     return ret
}
```

You call `maxelt` with one argument, which is an array name. The local variables `i` and `ret` are not intended to be arguments; while there is nothing to stop you from passing more than one argument to `maxelt`, the results would be strange. The extra space before `i` in the function parameter list indicates that `i` and `ret` are not supposed to be arguments. You should follow this convention when defining functions.

The following program uses the `maxelt` function. It loads an array, calls `maxelt`, and then reports the maximum number in that array:

```
function maxelt(vec,   i, ret)
{
     for (i in vec) {
          if (ret == "" || vec[i] > ret)
               ret = vec[i]
     }
     return ret
}

# Load all fields of each record into nums.
```

```
{
     for(i = 1; i <= NF; i++)
          nums[NR, i] = $i
}

END {
     print maxelt(nums)
}
```

Given the following input:

```
 1 5 23 8 16
44 3 5 2 8 26
256 291 1396 2962 100
-6 467 998 1101
99385 11 0 225
```

the program reports (predictably) that `99385` is the largest number in the array.

8.2.5 Functions and Their Effects on Variable Typing

`awk` is a very fluid language. It is possible that `awk` can't tell if an identifier represents a regular variable or an array until runtime. Here is an annotated sample program:

```
function foo(a)
{
    a[1] = 1   # parameter is an array
}

BEGIN {
    b = 1
    foo(b)  # invalid: fatal type mismatch

    foo(x)  # x uninitialized, becomes an array dynamically
    x = 1   # now not allowed, runtime error
}
```

Usually, such things aren't a big issue, but it's worth being aware of them.

9 Internationalization with gawk

Once upon a time, computer makers wrote software that worked only in English. Eventually, hardware and software vendors noticed that if their systems worked in the native languages of non-English-speaking countries, they were able to sell more systems. As a result, internationalization and localization of programs and software systems became a common practice.

Until recently, the ability to provide internationalization was largely restricted to programs written in C and C++. This chapter describes the underlying library `gawk` uses for internationalization, as well as how `gawk` makes internationalization features available at the `awk` program level. Having internationalization available at the `awk` level gives software developers additional flexibility—they are no longer required to write in C when internationalization is a requirement.

9.1 Internationalization and Localization

Internationalization means writing (or modifying) a program once, in such a way that it can use multiple languages without requiring further source-code changes. *Localization* means providing the data necessary for an internationalized program to work in a particular language. Most typically, these terms refer to features such as the language used for printing error messages, the language used to read responses, and information related to how numerical and monetary values are printed and read.

9.2 GNU `gettext`

The facilities in GNU `gettext` focus on messages; strings printed by a program, either directly or via formatting with `printf` or `sprintf`.[1]

When using GNU `gettext`, each application has its own *text domain*. This is a unique name, such as '`kpilot`' or '`gawk`', that identifies the application. A complete application may have multiple components—programs written in C or C++, as well as scripts written in `sh` or `awk`. All of the components use the same text domain.

To make the discussion concrete, assume we're writing an application named `guide`. Internationalization consists of the following steps, in this order:

1. The programmer goes through the source for all of `guide`'s components and marks each string that is a candidate for translation. For example, `"'-F': option required"` is a good candidate for translation. A table with strings of option names is not (e.g., `gawk`'s '`--profile`' option should remain the same, no matter what the local language).
2. The programmer indicates the application's text domain (`"guide"`) to the `gettext` library, by calling the `textdomain` function.
3. Messages from the application are extracted from the source code and collected into a portable object file ('`guide.po`'), which lists the strings and their translations. The translations are initially empty. The original (usually English) messages serve as the key for lookup of the translations.

[1] For some operating systems, the `gawk` port doesn't support GNU `gettext`. This applies most notably to the PC operating systems. As such, these features are not available if you are using one of those operating systems. Sorry.

4. For each language with a translator, 'guide.po' is copied and translations are created and shipped with the application.
5. Each language's '.po' file is converted into a binary message object ('.mo') file. A message object file contains the original messages and their translations in a binary format that allows fast lookup of translations at runtime.
6. When guide is built and installed, the binary translation files are installed in a standard place.
7. For testing and development, it is possible to tell gettext to use '.mo' files in a different directory than the standard one by using the bindtextdomain function.
8. At runtime, guide looks up each string via a call to gettext. The returned string is the translated string if available, or the original string if not.
9. If necessary, it is possible to access messages from a different text domain than the one belonging to the application, without having to switch the application's default text domain back and forth.

In C (or C++), the string marking and dynamic translation lookup are accomplished by wrapping each string in a call to gettext:

```
printf(gettext("Don't Panic!\n"));
```

The tools that extract messages from source code pull out all strings enclosed in calls to gettext.

The GNU gettext developers, recognizing that typing 'gettext' over and over again is both painful and ugly to look at, use the macro '_' (an underscore) to make things easier:

```
/* In the standard header file: */
#define _(str) gettext(str)

/* In the program text: */
printf(_("Don't Panic!\n"));
```

This reduces the typing overhead to just three extra characters per string and is considerably easier to read as well. There are locale *categories* for different types of locale-related information. The defined locale categories that gettext knows about are:

LC_MESSAGES
: Text messages. This is the default category for gettext operations, but it is possible to supply a different one explicitly, if necessary. (It is almost never necessary to supply a different category.)

LC_COLLATE
: Text-collation information; i.e., how different characters and/or groups of characters sort in a given language.

LC_CTYPE
: Character-type information (alphabetic, digit, upper- or lowercase, and so on). This information is accessed via the POSIX character classes in regular expressions, such as /[[:alnum:]]/ (see Section 2.3 [Regular Expression Operators], page 27).

LC_MONETARY
: Monetary information, such as the currency symbol, and whether the symbol goes before or after a number.

`LC_NUMERIC`
: Numeric information, such as which characters to use for the decimal point and the thousands separator.[2]

`LC_RESPONSE`
: Response information, such as how "yes" and "no" appear in the local language, and possibly other information as well.

`LC_TIME`
: Time- and date-related information, such as 12- or 24-hour clock, month printed before or after day in a date, local month abbreviations, and so on.

`LC_ALL`
: All of the above. (Not too useful in the context of `gettext`.)

9.3 Internationalizing `awk` Programs

`gawk` provides the following variables and functions for internationalization:

`TEXTDOMAIN`
: This variable indicates the application's text domain. For compatibility with GNU `gettext`, the default value is `"messages"`.

`_"your message here"`
: String constants marked with a leading underscore are candidates for translation at runtime. String constants without a leading underscore are not translated.

`dcgettext(`*`string`* [`,` *`domain`* [`,` *`category`*]]`)`
: This built-in function returns the translation of *string* in text domain *domain* for locale category *category*. The default value for *domain* is the current value of `TEXTDOMAIN`. The default value for *category* is `"LC_MESSAGES"`.

  If you supply a value for *category*, it must be a string equal to one of the known locale categories described in the previous section. You must also supply a text domain. Use `TEXTDOMAIN` if you want to use the current domain.

  Caution: The order of arguments to the `awk` version of the `dcgettext` function is purposely different from the order for the C version. The `awk` version's order was chosen to be simple and to allow for reasonable `awk`-style default arguments.

`dcngettext(`*`string1`*`,` *`string2`*`,` *`number`* [`,` *`domain`* [`,` *`category`*]]`)`
: This built-in function returns the plural form used for *number* of the translation of *string1* and *string2* in text domain *domain* for locale category *category*. *string1* is the English singular variant of a message, and *string2* the English plural variant of the same message. The default value for *domain* is the current value of `TEXTDOMAIN`. The default value for *category* is `"LC_MESSAGES"`.

  The same remarks as for the `dcgettext` function apply.

`bindtextdomain(`*`directory`* [`,` *`domain`*]`)`
: This built-in function allows you to specify the directory in which `gettext` looks for '`.mo`' files, in case they will not or cannot be placed in the standard locations (e.g., during testing). It returns the directory in which *domain* is "bound."

[2] Americans use a comma every three decimal places and a period for the decimal point, while many Europeans do exactly the opposite: `1,234.56` versus `1.234,56`.

The default *domain* is the value of `TEXTDOMAIN`. If *directory* is the null string (`""`), then `bindtextdomain` returns the current binding for the given *domain*.

To use these facilities in your `awk` program, follow the steps outlined in the previous section, like so:

1. Set the variable `TEXTDOMAIN` to the text domain of your program. This is best done in a `BEGIN` rule (see Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96), or it can also be done via the '`-v`' command-line option (see Section 11.2 [Command-Line Options], page 173):

   ```
   BEGIN {
       TEXTDOMAIN = "guide"
       ...
   }
   ```

2. Mark all translatable strings with a leading underscore ('`_`') character. It *must* be adjacent to the opening quote of the string. For example:

   ```
   print _"hello, world"
   x = _"you goofed"
   printf(_"Number of users is %d\n", nusers)
   ```

3. If you are creating strings dynamically, you can still translate them, using the `dcgettext` built-in function:

   ```
   message = nusers " users logged in"
   message = dcgettext(message, "adminprog")
   print message
   ```

   Here, the call to `dcgettext` supplies a different text domain (`"adminprog"`) in which to find the message, but it uses the default `"LC_MESSAGES"` category.

4. During development, you might want to put the '`.mo`' file in a private directory for testing. This is done with the `bindtextdomain` built-in function:

   ```
   BEGIN {
      TEXTDOMAIN = "guide"   # our text domain
      if (Testing) {
          # where to find our files
          bindtextdomain("testdir")
          # joe is in charge of adminprog
          bindtextdomain("../joe/testdir", "adminprog")
      }
      ...
   }
   ```

See Section 9.5 [A Simple Internationalization Example], page 162, for an example program showing the steps to create and use translations from `awk`.

9.4 Translating `awk` Programs

Once a program's translatable strings have been marked, they must be extracted to create the initial '`.po`' file. As part of translation, it is often helpful to rearrange the order in which arguments to `printf` are output.

gawk's '--gen-po' command-line option extracts the messages and is discussed next. After that, printf's ability to rearrange the order for printf arguments at runtime is covered.

9.4.1 Extracting Marked Strings

Once your awk program is working, and all the strings have been marked and you've set (and perhaps bound) the text domain, it is time to produce translations. First, use the '--gen-po' command-line option to create the initial '.po' file:

```
$ gawk --gen-po -f guide.awk > guide.po
```

When run with '--gen-po', gawk does not execute your program. Instead, it parses it as usual and prints all marked strings to standard output in the format of a GNU gettext Portable Object file. Also included in the output are any constant strings that appear as the first argument to dcgettext or as the first and second argument to dcngettext.[3] See Section 9.5 [A Simple Internationalization Example], page 162, for the full list of steps to go through to create and test translations for guide.

9.4.2 Rearranging printf Arguments

Format strings for printf and sprintf (see Section 4.5 [Using printf Statements for Fancier Printing], page 60) present a special problem for translation. Consider the following:[4]

```
printf(_"String `%s' has %d characters\n",
          string, length(string)))
```

A possible German translation for this might be:

```
"%d Zeichen lang ist die Zeichenkette `%s'\n"
```

The problem should be obvious: the order of the format specifications is different from the original! Even though gettext can return the translated string at runtime, it cannot change the argument order in the call to printf.

To solve this problem, printf format specificiers may have an additional optional element, which we call a *positional specifier*. For example:

```
"%2$d Zeichen lang ist die Zeichenkette `%1$s'\n"
```

Here, the positional specifier consists of an integer count, which indicates which argument to use, and a '$'. Counts are one-based, and the format string itself is *not* included. Thus, in the following example, 'string' is the first argument and 'length(string)' is the second:

```
$ gawk 'BEGIN {
>     string = "Dont Panic"
>     printf _"%2$d characters live in \"%1$s\"\n",
>                          string, length(string)
> }'
 ⊣ 10 characters live in "Dont Panic"
```

If present, positional specifiers come first in the format specification, before the flags, the field width, and/or the precision.

[3] Starting with gettext version 0.11.5, the xgettext utility that comes with GNU gettext can handle '.awk' files.

[4] This example is borrowed from the GNU gettext manual.

Positional specifiers can be used with the dynamic field width and precision capability:

```
$ gawk 'BEGIN {
>     printf("%*.*s\n", 10, 20, "hello")
>     printf("%3$*2$.*1$s\n", 20, 10, "hello")
> }'
 -|       hello
 -|       hello
```

NOTE: When using '`*`' with a positional specifier, the '`*`' comes first, then the integer position, and then the '`$`'. This is somewhat counterintutive.

`gawk` does not allow you to mix regular format specifiers and those with positional specifiers in the same string:

```
$ gawk 'BEGIN { printf _"%d %3$s\n", 1, 2, "hi" }'
error  gawk: cmd. line:1: fatal: must use 'count$' on all formats or none
```

NOTE: There are some pathological cases that `gawk` may fail to diagnose. In such cases, the output may not be what you expect. It's still a bad idea to try mixing them, even if `gawk` doesn't detect it.

Although positional specifiers can be used directly in `awk` programs, their primary purpose is to help in producing correct translations of format strings into languages different from the one in which the program is first written.

9.4.3 `awk` Portability Issues

`gawk`'s internationalization features were purposely chosen to have as little impact as possible on the portability of `awk` programs that use them to other versions of `awk`. Consider this program:

```
BEGIN {
    TEXTDOMAIN = "guide"
    if (Test_Guide)   # set with -v
        bindtextdomain("/test/guide/messages")
    print _"don't panic!"
}
```

As written, it won't work on other versions of `awk`. However, it is actually almost portable, requiring very little change:

- Assignments to `TEXTDOMAIN` won't have any effect, since `TEXTDOMAIN` is not special in other `awk` implementations.
- Non-GNU versions of `awk` treat marked strings as the concatenation of a variable named `_` with the string following it.[5] Typically, the variable `_` has the null string (`""`) as its value, leaving the original string constant as the result.
- By defining "dummy" functions to replace `dcgettext`, `dcngettext` and `bindtextdomain`, the `awk` program can be made to run, but all the messages are output in the original language. For example:

```
function bindtextdomain(dir, domain)
{
    return dir
```

[5] This is good fodder for an "Obfuscated `awk`" contest.

```
}

function dcgettext(string, domain, category)
{
    return string
}

function dcngettext(string1, string2, number, domain, category)
{
    return (number == 1 ? string1 : string2)
}
```

- The use of positional specifications in `printf` or `sprintf` is *not* portable. To support `gettext` at the C level, many systems' C versions of `sprintf` do support positional specifiers. But it works only if enough arguments are supplied in the function call. Many versions of `awk` pass `printf` formats and arguments unchanged to the underlying C library version of `sprintf`, but only one format and argument at a time. What happens if a positional specification is used is anybody's guess. However, since the positional specifications are primarily for use in *translated* format strings, and since non-GNU `awk`s never retrieve the translated string, this should not be a problem in practice.

9.5 A Simple Internationalization Example

Now let's look at a step-by-step example of how to internationalize and localize a simple `awk` program, using '`guide.awk`' as our original source:

```
BEGIN {
    TEXTDOMAIN = "guide"
    bindtextdomain(".")  # for testing
    print _"Don't Panic"
    print _"The Answer Is", 42
    print "Pardon me, Zaphod who?"
}
```

Run '`gawk --gen-po`' to create the '`.po`' file:

```
$ gawk --gen-po -f guide.awk > guide.po
```

This produces:

```
#: guide.awk:4
msgid "Don't Panic"
msgstr ""

#: guide.awk:5
msgid "The Answer Is"
msgstr ""
```

This original portable object file is saved and reused for each language into which the application is translated. The `msgid` is the original string and the `msgstr` is the translation.

NOTE: Strings not marked with a leading underscore do not appear in the 'guide.po' file.

Next, the messages must be translated. Here is a translation to a hypothetical dialect of English, called "Mellow":[6]

```
$ cp guide.po guide-mellow.po
Add translations to guide-mellow.po ...
```

Following are the translations:

```
#: guide.awk:4
msgid "Don't Panic"
msgstr "Hey man, relax!"

#: guide.awk:5
msgid "The Answer Is"
msgstr "Like, the scoop is"
```

The next step is to make the directory to hold the binary message object file and then to create the 'guide.mo' file. The directory layout shown here is standard for GNU gettext on GNU/Linux systems. Other versions of gettext may use a different layout:

```
$ mkdir en_US en_US/LC_MESSAGES
```

The msgfmt utility does the conversion from human-readable '.po' file to machine-readable '.mo' file. By default, msgfmt creates a file named 'messages'. This file must be renamed and placed in the proper directory so that gawk can find it:

```
$ msgfmt guide-mellow.po
$ mv messages en_US/LC_MESSAGES/guide.mo
```

Finally, we run the program to test it:

```
$ gawk -f guide.awk
⊣ Hey man, relax!
⊣ Like, the scoop is 42
⊣ Pardon me, Zaphod who?
```

If the three replacement functions for dcgettext, dcngettext and bindtextdomain (see Section 9.4.3 [awk Portability Issues], page 161) are in a file named 'libintl.awk', then we can run 'guide.awk' unchanged as follows:

```
$ gawk --posix -f guide.awk -f libintl.awk
⊣ Don't Panic
⊣ The Answer Is 42
⊣ Pardon me, Zaphod who?
```

9.6 gawk Can Speak Your Language

As of version 3.1, gawk itself has been internationalized using the GNU gettext package. (GNU gettext is described in complete detail in *GNU gettext tools*.) As of this writing, the latest version of GNU gettext is version 0.11.5 (ftp://ftp.gnu.org/gnu/gettext/gettext-0.11.5.tar.gz).

[6] Perhaps it would be better if it were called "Hippy." Ah, well.

If a translation of `gawk`'s messages exists, then `gawk` produces usage messages, warnings, and fatal errors in the local language.

On systems that do not use version 2 (or later) of the GNU C library, you should configure `gawk` with the '`--with-included-gettext`' option before compiling and installing it. See Section B.2.2 [Additional Configuration Options], page 264, for more information.

10 Advanced Features of gawk

> *Write documentation as if whoever reads it is a violent psychopath who knows where you live.*
> Steve English, as quoted by Peter Langston

This chapter discusses advanced features in `gawk`. It's a bit of a "grab bag" of items that are otherwise unrelated to each other. First, a command-line option allows `gawk` to recognize nondecimal numbers in input data, not just in `awk` programs. Next, two-way I/O, discussed briefly in earlier parts of this book, is described in full detail, along with the basics of TCP/IP networking and BSD portal files. Finally, `gawk` can *profile* an `awk` program, making it possible to tune it for performance.

Section C.3 [Adding New Built-in Functions to `gawk`], page 282, discusses the ability to dynamically add new built-in functions to `gawk`. As this feature is still immature and likely to change, its description is relegated to an appendix.

10.1 Allowing Nondecimal Input Data

If you run `gawk` with the '`--non-decimal-data`' option, you can have nondecimal constants in your input data:

```
$ echo 0123 123 0x123 |
> gawk --non-decimal-data '{ printf "%d, %d, %d\n",
>                                          $1, $2, $3 }'
⊣ 83, 123, 291
```

For this feature to work, write your program so that `gawk` treats your data as numeric:

```
$ echo 0123 123 0x123 | gawk '{ print $1, $2, $3 }'
⊣ 0123 123 0x123
```

The `print` statement treats its expressions as strings. Although the fields can act as numbers when necessary, they are still strings, so `print` does not try to treat them numerically. You may need to add zero to a field to force it to be treated as a number. For example:

```
$ echo 0123 123 0x123 | gawk --non-decimal-data '
> { print $1, $2, $3
>   print $1 + 0, $2 + 0, $3 + 0 }'
⊣ 0123 123 0x123
⊣ 83 123 291
```

Because it is common to have decimal data with leading zeros, and because using it could lead to surprising results, the default is to leave this facility disabled. If you want it, you must explicitly request it.

Caution: *Use of this option is not recommended.* It can break old programs very badly. Instead, use the `strtonum` function to convert your data (see Section 5.1.2 [Octal and Hexadecimal Numbers], page 73). This makes your programs easier to write and easier to read, and leads to less surprising results.

10.2 Two-Way Communications with Another Process

```
From: brennan@whidbey.com (Mike Brennan)
Newsgroups: comp.lang.awk
Subject: Re: Learn the SECRET to Attract Women Easily
Date: 4 Aug 1997 17:34:46 GMT
Message-ID: <5s53rm$eca@news.whidbey.com>

On 3 Aug 1997 13:17:43 GMT, Want More Dates???
<tracy78@kilgrona.com> wrote:
>Learn the SECRET to Attract Women Easily
>
>The SCENT(tm)  Pheromone Sex Attractant For Men to Attract Women

The scent of awk programmers is a lot more attractive to women than
the scent of perl programmers.
--
Mike Brennan
```

It is often useful to be able to send data to a separate program for processing and then read the result. This can always be done with temporary files:

```
# write the data for processing
tempfile = ("mydata." PROCINFO["pid"])
while (not done with data)
    print data | ("subprogram > " tempfile)
close("subprogram > " tempfile)

# read the results, remove tempfile when done
while ((getline newdata < tempfile) > 0)
    process newdata appropriately
close(tempfile)
system("rm " tempfile)
```

This works, but not elegantly. Among other things, it requires that the program be run in a directory that cannot be shared among users; for example, '`/tmp`' will not do, as another user might happen to be using a temporary file with the same name.

Starting with version 3.1 of `gawk`, it is possible to open a *two-way* pipe to another process. The second process is termed a *coprocess*, since it runs in parallel with `gawk`. The two-way connection is created using the new '`|&`' operator (borrowed from the Korn shell, `ksh`):[1]

```
do {
    print data |& "subprogram"
    "subprogram" |& getline results
} while (data left to process)
close("subprogram")
```

The first time an I/O operation is executed using the '`|&`' operator, `gawk` creates a two-way pipeline to a child process that runs the other program. Output created with `print` or `printf` is written to the program's standard input, and output from the program's standard output can be read by the `gawk` program using `getline`. As is the case with processes started by '`|`', the subprogram can be any program, or pipeline of programs, that can be started by the shell.

[1] This is very different from the same operator in the C shell, `csh`.

There are some cautionary items to be aware of:

- As the code inside gawk currently stands, the coprocess's standard error goes to the same place that the parent gawk's standard error goes. It is not possible to read the child's standard error separately.
- I/O buffering may be a problem. gawk automatically flushes all output down the pipe to the child process. However, if the coprocess does not flush its output, gawk may hang when doing a getline in order to read the coprocess's results. This could lead to a situation known as *deadlock*, where each process is waiting for the other one to do something.

It is possible to close just one end of the two-way pipe to a coprocess, by supplying a second argument to the close function of either "to" or "from" (see Section 4.8 [Closing Input and Output Redirections], page 70). These strings tell gawk to close the end of the pipe that sends data to the process or the end that reads from it, respectively.

This is particularly necessary in order to use the system sort utility as part of a coprocess; sort must read *all* of its input data before it can produce any output. The sort program does not receive an end-of-file indication until gawk closes the write end of the pipe.

When you have finished writing data to the sort utility, you can close the "to" end of the pipe, and then start reading sorted data via getline. For example:

```
BEGIN {
    command = "LC_ALL=C sort"
    n = split("abcdefghijklmnopqrstuvwxyz", a, "")

    for (i = n; i > 0; i--)
        print a[i] |& command
    close(command, "to")

    while ((command |& getline line) > 0)
        print "got", line
    close(command)
}
```

This program writes the letters of the alphabet in reverse order, one per line, down the two-way pipe to sort. It then closes the write end of the pipe, so that sort receives an end-of-file indication. This causes sort to sort the data and write the sorted data back to the gawk program. Once all of the data has been read, gawk terminates the coprocess and exits.

As a side note, the assignment 'LC_ALL=C' in the sort command ensures traditional Unix (ASCII) sorting from sort.

Beginning with gawk 3.1.2, you may use Pseudo-ttys (ptys) for two-way communication instead of pipes, if your system supports them. This is done on a per-command basis, by setting a special element in the PROCINFO array (see Section 6.5.2 [Built-in Variables That Convey Information], page 110), like so:

```
command = "sort -nr"           # command, saved in variable for convenience
PROCINFO[command, "pty"] = 1   # update PROCINFO
```

```
print ... |& command       # start two-way pipe
...
```

Using ptys avoids the buffer deadlock issues described earlier, at some loss in performance. If your system does not have ptys, or if all the system's ptys are in use, `gawk` automatically falls back to using regular pipes.

10.3 Using `gawk` for Network Programming

EMISTERED: *A host is a host from coast to coast,*
and no-one can talk to host that's close,
unless the host that isn't close
is busy hung or dead.

In addition to being able to open a two-way pipeline to a coprocess on the same system (see Section 10.2 [Two-Way Communications with Another Process], page 166), it is possible to make a two-way connection to another process on another system across an IP networking connection.

You can think of this as just a *very long* two-way pipeline to a coprocess. The way `gawk` decides that you want to use TCP/IP networking is by recognizing special file names that begin with '`/inet/`'.

The full syntax of the special file name is '`/inet/`*`protocol`*`/`*`local-port`*`/`*`remote-host`*`/`*`remote-port`*'. The components are:

protocol The protocol to use over IP. This must be either '`tcp`', '`udp`', or '`raw`', for a TCP, UDP, or raw IP connection, respectively. The use of TCP is recommended for most applications.

Caution: The use of raw sockets is not currently supported in version 3.1 of `gawk`.

local-port The local TCP or UDP port number to use. Use a port number of '`0`' when you want the system to pick a port. This is what you should do when writing a TCP or UDP client. You may also use a well-known service name, such as '`smtp`' or '`http`', in which case `gawk` attempts to determine the predefined port number using the C `getservbyname` function.

remote-host The IP address or fully-qualified domain name of the Internet host to which you want to connect.

remote-port The TCP or UDP port number to use on the given *remote-host*. Again, use '`0`' if you don't care, or else a well-known service name.

Consider the following very simple example:

```
BEGIN {
  Service = "/inet/tcp/0/localhost/daytime"
  Service |& getline
  print $0
  close(Service)
}
```

This program reads the current date and time from the local system's TCP 'daytime' server. It then prints the results and closes the connection.

Because this topic is extensive, the use of gawk for TCP/IP programming is documented separately. See *TCP/IP Internetworking with* gawk, which comes as part of the gawk distribution, for a much more complete introduction and discussion, as well as extensive examples.

10.4 Using gawk with BSD Portals

Similar to the '/inet' special files, if gawk is configured with the '--enable-portals' option (see Section B.2.1 [Compiling gawk for Unix], page 264), then gawk treats files whose pathnames begin with /p as 4.4 BSD-style portals.

When used with the '|&' operator, gawk opens the file for two-way communications. The operating system's portal mechanism then manages creating the process associated with the portal and the corresponding communications with the portal's process.

10.5 Profiling Your awk Programs

Beginning with version 3.1 of gawk, you may produce execution traces of your awk programs. This is done with a specially compiled version of gawk, called pgawk ("profiling gawk").

pgawk is identical in every way to gawk, except that when it has finished running, it creates a profile of your program in a file named 'awkprof.out'. Because it is profiling, it also executes up to 45% slower than gawk normally does.

As shown in the following example, the '--profile' option can be used to change the name of the file where pgawk will write the profile:

```
$ pgawk --profile=myprog.prof -f myprog.awk data1 data2
```

In the above example, pgawk places the profile in 'myprog.prof' instead of in 'awkprof.out'.

Regular gawk also accepts this option. When called with just '--profile', gawk "pretty prints" the program into 'awkprof.out', without any execution counts. You may supply an option to '--profile' to change the file name. Here is a sample session showing a simple awk program, its input data, and the results from running pgawk. First, the awk program:

```
BEGIN { print "First BEGIN rule" }

END { print "First END rule" }

/foo/ {
    print "matched /foo/, gosh"
    for (i = 1; i <= 3; i++)
        sing()
}

{
    if (/foo/)
        print "if is true"
    else
        print "else is true"
```

```
}

BEGIN { print "Second BEGIN rule" }

END { print "Second END rule" }

function sing(    dummy)
{
    print "I gotta be me!"
}
```

Following is the input data:

```
foo
bar
baz
foo
junk
```

Here is the '`awkprof.out`' that results from running `pgawk` on this program and data (this example also illustrates that `awk` programmers sometimes have to work late):

```
        # gawk profile, created Sun Aug 13 00:00:15 2000

        # BEGIN block(s)

        BEGIN {
    1           print "First BEGIN rule"
    1           print "Second BEGIN rule"
        }

        # Rule(s)

    5   /foo/   { # 2
    2           print "matched /foo/, gosh"
    6           for (i = 1; i <= 3; i++) {
    6                   sing()
                }
        }

    5   {
    5           if (/foo/) { # 2
    2                   print "if is true"
    3           } else {
    3                   print "else is true"
                }
        }

        # END block(s)
```

```
   END {
1          print "First END rule"
1          print "Second END rule"
   }

   # Functions, listed alphabetically

6  function sing(dummy)
   {
6          print "I gotta be me!"
   }
```

This example illustrates many of the basic rules for profiling output. The rules are as follows:

- The program is printed in the order `BEGIN` rule, pattern/action rules, `END` rule and functions, listed alphabetically. Multiple `BEGIN` and `END` rules are merged together.
- Pattern-action rules have two counts. The first count, to the left of the rule, shows how many times the rule's pattern was *tested*. The second count, to the right of the rule's opening left brace in a comment, shows how many times the rule's action was *executed*. The difference between the two indicates how many times the rule's pattern evaluated to false.
- Similarly, the count for an `if-else` statement shows how many times the condition was tested. To the right of the opening left brace for the `if`'s body is a count showing how many times the condition was true. The count for the `else` indicates how many times the test failed.
- The count for a loop header (such as `for` or `while`) shows how many times the loop test was executed. (Because of this, you can't just look at the count on the first statement in a rule to determine how many times the rule was executed. If the first statement is a loop, the count is misleading.)
- For user-defined functions, the count next to the `function` keyword indicates how many times the function was called. The counts next to the statements in the body show how many times those statements were executed.
- The layout uses "K&R" style with tabs. Braces are used everywhere, even when the body of an `if`, `else`, or loop is only a single statement.
- Parentheses are used only where needed, as indicated by the structure of the program and the precedence rules. For example, '`(3 + 5) * 4`' means add three plus five, then multiply the total by four. However, '`3 + 5 * 4`' has no parentheses, and means '`3 + (5 * 4)`'.
- All string concatenations are parenthesized too. (This could be made a bit smarter.)
- Parentheses are used around the arguments to `print` and `printf` only when the `print` or `printf` statement is followed by a redirection. Similarly, if the target of a redirection isn't a scalar, it gets parenthesized.
- `pgawk` supplies leading comments in front of the `BEGIN` and `END` rules, the pattern/action rules, and the functions.

The profiled version of your program may not look exactly like what you typed when you wrote it. This is because `pgawk` creates the profiled version by "pretty printing" its

internal representation of the program. The advantage to this is that `pgawk` can produce a standard representation. The disadvantage is that all source-code comments are lost, as are the distinctions among multiple `BEGIN` and `END` rules. Also, things such as:

```
/foo/
```

come out as:

```
/foo/   {
    print $0
}
```

which is correct, but possibly surprising.

Besides creating profiles when a program has completed, `pgawk` can produce a profile while it is running. This is useful if your `awk` program goes into an infinite loop and you want to see what has been executed. To use this feature, run `pgawk` in the background:

```
$ pgawk -f myprog &
[1] 13992
```

The shell prints a job number and process ID number; in this case, 13992. Use the `kill` command to send the `USR1` signal to `pgawk`:

```
$ kill -USR1 13992
```

As usual, the profiled version of the program is written to '`awkprof.out`', or to a different file if you use the '`--profile`' option.

Along with the regular profile, as shown earlier, the profile includes a trace of any active functions:

```
# Function Call Stack:

#   3. baz
#   2. bar
#   1. foo
# -- main --
```

You may send `pgawk` the `USR1` signal as many times as you like. Each time, the profile and function call trace are appended to the output profile file.

If you use the `HUP` signal instead of the `USR1` signal, `pgawk` produces the profile and the function call trace and then exits.

When `pgawk` runs on MS-DOS or MS-Windows, it uses the `INT` and `QUIT` signals for producing the profile and, in the case of the `INT` signal, `pgawk` exits. This is because these systems don't support the `kill` command, so the only signals you can deliver to a program are those generated by the keyboard. The `INT` signal is generated by the *`Ctrl`*-⟨C⟩ or *`Ctrl`*-⟨BREAK⟩ key, while the `QUIT` signal is generated by the *`Ctrl`*-⟨"⟩ key.

11 Running awk and gawk

This chapter covers how to run awk, both POSIX-standard and gawk-specific command-line options, and what awk and gawk do with non-option arguments. It then proceeds to cover how gawk searches for source files, obsolete options and/or features, and known bugs in gawk. This chapter rounds out the discussion of awk as a program and as a language.

While a number of the options and features described here were discussed in passing earlier in the book, this chapter provides the full details.

11.1 Invoking awk

There are two ways to run awk—with an explicit program or with one or more program files. Here are templates for both of them; items enclosed in [...] in these templates are optional:

```
awk [options] -f progfile [--] file ...
awk [options] [--] 'program' file ...
```

Besides traditional one-letter POSIX-style options, gawk also supports GNU long options.

It is possible to invoke awk with an empty program:

```
awk '' datafile1 datafile2
```

Doing so makes little sense, though; awk exits silently when given an empty program. If '--lint' has been specified on the command line, gawk issues a warning that the program is empty.

11.2 Command-Line Options

Options begin with a dash and consist of a single character. GNU-style long options consist of two dashes and a keyword. The keyword can be abbreviated, as long as the abbreviation allows the option to be uniquely identified. If the option takes an argument, then the keyword is either immediately followed by an equals sign ('=') and the argument's value, or the keyword and the argument's value are separated by whitespace. If a particular option with a value is given more than once, it is the last value that counts.

Each long option for gawk has a corresponding POSIX-style option. The long and short options are interchangeable in all contexts. The options and their meanings are as follows:

`-F` *fs*
`--field-separator` *fs*
: Sets the FS variable to *fs* (see Section 3.5 [Specifying How Fields Are Separated], page 43).

`-f` *source-file*
`--file` *source-file*
: Indicates that the awk program is to be found in *source-file* instead of in the first non-option argument.

`-v` *var=val*
`--assign` *var=val*
: Sets the variable *var* to the value *val before* execution of the program begins. Such variable values are available inside the `BEGIN` rule (see Section 11.3 [Other Command-Line Arguments], page 178).

  The '`-v`' option can only set one variable, but it can be used more than once, setting another variable each time, like this: '`awk -v foo=1 -v bar=2 ...`'.

  Caution: Using '`-v`' to set the values of the built-in variables may lead to surprising results. `awk` will reset the values of those variables as it needs to, possibly ignoring any predefined value you may have given.

`-mf` *N*
`-mr` *N*
: Sets various memory limits to the value *N*. The '`f`' flag sets the maximum number of fields and the '`r`' flag sets the maximum record size. These two flags and the '`-m`' option are from the Bell Laboratories research version of Unix `awk`. They are provided for compatibility but otherwise ignored by `gawk`, since `gawk` has no predefined limits. (The Bell Laboratories `awk` no longer needs these options; it continues to accept them to avoid breaking old programs.)

`-W` *gawk-opt*
: Following the POSIX standard, implementation-specific options are supplied as arguments to the '`-W`' option. These options also have corresponding GNU-style long options. Note that the long options may be abbreviated, as long as the abbreviations remain unique. The full list of `gawk`-specific options is provided next.

`--`
: Signals the end of the command-line options. The following arguments are not treated as options even if they begin with '`-`'. This interpretation of '`--`' follows the POSIX argument parsing conventions.

  This is useful if you have file names that start with '`-`', or in shell scripts, if you have file names that will be specified by the user that could start with '`-`'.

The previous list described options mandated by the POSIX standard, as well as options available in the Bell Laboratories version of `awk`. The following list describes `gawk`-specific options:

`-W compat`
`-W traditional`
`--compat`
`--traditional`
: Specifies *compatibility mode*, in which the GNU extensions to the `awk` language are disabled, so that `gawk` behaves just like the Bell Laboratories research version of Unix `awk`. '`--traditional`' is the preferred form of this option. See Section A.5 [Extensions in `gawk` Not in POSIX `awk`], page 255, which summarizes the extensions. Also see Section C.1 [Downward Compatibility and Debugging], page 279.

`-W copyright`
`--copyright`
: Print the short version of the General Public License and then exit.

`-W copyleft`
`--copyleft`
: Just like '`--copyright`'. This option may disappear in a future version of `gawk`.

`-W dump-variables[=`*file*`]`
`--dump-variables[=`*file*`]`
: Prints a sorted list of global variables, their types, and final values to *file*. If no *file* is provided, `gawk` prints this list to the file named '`awkvars.out`' in the current directory.

  Having a list of all global variables is a good way to look for typographical errors in your programs. You would also use this option if you have a large program with a lot of functions, and you want to be sure that your functions don't inadvertently use global variables that you meant to be local. (This is a particularly easy mistake to make with simple variable names like `i`, `j`, etc.)

`-W gen-po`
`--gen-po` Analyzes the source program and generates a GNU `gettext` Portable Object file on standard output for all string constants that have been marked for translation. See Chapter 9 [Internationalization with `gawk`], page 156, for information about this option.

`-W help`
`-W usage`
`--help`
`--usage` Prints a "usage" message summarizing the short and long style options that `gawk` accepts and then exit.

`-W lint[=fatal]`
`--lint[=fatal]`
: Warns about constructs that are dubious or nonportable to other `awk` implementations. Some warnings are issued when `gawk` first reads your program. Others are issued at runtime, as your program executes. With an optional argument of '`fatal`', lint warnings become fatal errors. This may be drastic, but its use will certainly encourage the development of cleaner `awk` programs. With an optional argument of '`invalid`', only warnings about things that are actually invalid are issued. (This is not fully implemented yet.)

`-W lint-old`
`--lint-old`
: Warns about constructs that are not available in the original version of `awk` from Version 7 Unix (see Section A.1 [Major Changes Between V7 and SVR3.1], page 252).

`-W non-decimal-data`
`--non-decimal-data`
: Enable automatic interpretation of octal and hexadecimal values in input data (see Section 10.1 [Allowing Nondecimal Input Data], page 165).

  Caution: This option can severely break old programs. Use with care.

`-W posix`
`--posix` Operates in strict POSIX mode. This disables all `gawk` extensions (just like '`--traditional`') and adds the following additional restrictions:

- `\x` escape sequences are not recognized (see Section 2.2 [Escape Sequences], page 25).
- Newlines do not act as whitespace to separate fields when `FS` is equal to a single space (see Section 3.2 [Examining Fields], page 39).
- Newlines are not allowed after '`?`' or '`:`' (see Section 5.12 [Conditional Expressions], page 89).
- The synonym `func` for the keyword `function` is not recognized (see Section 8.2.1 [Function Definition Syntax], page 149).
- The '`**`' and '`**=`' operators cannot be used in place of '`^`' and '`^=`' (see Section 5.5 [Arithmetic Operators], page 78, and also see Section 5.7 [Assignment Expressions], page 81).
- Specifying '`-Ft`' on the command-line does not set the value of `FS` to be a single TAB character (see Section 3.5 [Specifying How Fields Are Separated], page 43).
- The `fflush` built-in function is not supported (see Section 8.1.4 [Input/Output Functions], page 140).

If you supply both '`--traditional`' and '`--posix`' on the command line, '`--posix`' takes precedence. `gawk` also issues a warning if both options are supplied.

`-W profile`[`=`*`file`*]
`--profile`[`=`*`file`*]
Enable profiling of `awk` programs (see Section 10.5 [Profiling Your `awk` Programs], page 169). By default, profiles are created in a file named '`awkprof.out`'. The optional *file* argument allows you to specify a different file name for the profile file.

When run with `gawk`, the profile is just a "pretty printed" version of the program. When run with `pgawk`, the profile contains execution counts for each statement in the program in the left margin, and function call counts for each function.

`-W re-interval`
`--re-interval`
Allows interval expressions (see Section 2.3 [Regular Expression Operators], page 27) in regexps. Because interval expressions were traditionally not available in `awk`, `gawk` does not provide them by default. This prevents old `awk` programs from breaking.

`-W source` *`program-text`*
`--source` *`program-text`*
Allows you to mix source code in files with source code that you enter on the command line. Program source code is taken from the *program-text*. This is particularly useful when you have library functions that you want to use

from your command-line programs (see Section 11.4 [The AWKPATH Environment Variable], page 178).

`-W version`
`--version`

Prints version information for this particular copy of gawk. This allows you to determine if your copy of gawk is up to date with respect to whatever the Free Software Foundation is currently distributing. It is also useful for bug reports (see Section B.5 [Reporting Problems and Bugs], page 276).

As long as program text has been supplied, any other options are flagged as invalid with a warning message but are otherwise ignored.

In compatibility mode, as a special case, if the value of *fs* supplied to the '`-F`' option is '`t`', then FS is set to the TAB character ("\t"). This is true only for '`--traditional`' and not for '`--posix`' (see Section 3.5 [Specifying How Fields Are Separated], page 43).

The '`-f`' option may be used more than once on the command line. If it is, awk reads its program source from all of the named files, as if they had been concatenated together into one big file. This is useful for creating libraries of awk functions. These functions can be written once and then retrieved from a standard place, instead of having to be included into each individual program. (As mentioned in Section 8.2.1 [Function Definition Syntax], page 149, function names must be unique.)

Library functions can still be used, even if the program is entered at the terminal, by specifying '`-f /dev/tty`'. After typing your program, type *Ctrl-d* (the end-of-file character) to terminate it. (You may also use '`-f -`' to read program source from the standard input but then you will not be able to also use the standard input as a source of data.)

Because it is clumsy using the standard awk mechanisms to mix source file and command-line awk programs, gawk provides the '`--source`' option. This does not require you to preempt the standard input for your source code; it allows you to easily mix command-line and library source code (see Section 11.4 [The AWKPATH Environment Variable], page 178).

If no '`-f`' or '`--source`' option is specified, then gawk uses the first non-option command-line argument as the text of the program source code.

If the environment variable POSIXLY_CORRECT exists, then gawk behaves in strict POSIX mode, exactly as if you had supplied the '`--posix`' command-line option. Many GNU programs look for this environment variable to turn on strict POSIX mode. If '`--lint`' is supplied on the command line and gawk turns on POSIX mode because of POSIXLY_CORRECT, then it issues a warning message indicating that POSIX mode is in effect. You would typically set this variable in your shell's startup file. For a Bourne-compatible shell (such as bash), you would add these lines to the '`.profile`' file in your home directory:

```
POSIXLY_CORRECT=true
export POSIXLY_CORRECT
```

For a csh-compatible shell,[1] you would add this line to the '`.login`' file in your home directory:

```
setenv POSIXLY_CORRECT true
```

Having POSIXLY_CORRECT set is not recommended for daily use, but it is good for testing the portability of your programs to other environments.

[1] Not recommended.

11.3 Other Command-Line Arguments

Any additional arguments on the command line are normally treated as input files to be processed in the order specified. However, an argument that has the form *var=value*, assigns the value *value* to the variable *var*—it does not specify a file at all. (This was discussed earlier in Section 5.3.2 [Assigning Variables on the Command Line], page 76.)

All these arguments are made available to your `awk` program in the `ARGV` array (see Section 6.5 [Built-in Variables], page 107). Command-line options and the program text (if present) are omitted from `ARGV`. All other arguments, including variable assignments, are included. As each element of `ARGV` is processed, `gawk` sets the variable `ARGIND` to the index in `ARGV` of the current element.

The distinction between file name arguments and variable-assignment arguments is made when `awk` is about to open the next input file. At that point in execution, it checks the file name to see whether it is really a variable assignment; if so, `awk` sets the variable instead of reading a file.

Therefore, the variables actually receive the given values after all previously specified files have been read. In particular, the values of variables assigned in this fashion are *not* available inside a `BEGIN` rule (see Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96), because such rules are run before `awk` begins scanning the argument list.

The variable values given on the command line are processed for escape sequences (see Section 2.2 [Escape Sequences], page 25).

In some earlier implementations of `awk`, when a variable assignment occurred before any file names, the assignment would happen *before* the `BEGIN` rule was executed. `awk`'s behavior was thus inconsistent; some command-line assignments were available inside the `BEGIN` rule, while others were not. Unfortunately, some applications came to depend upon this "feature." When `awk` was changed to be more consistent, the '`-v`' option was added to accommodate applications that depended upon the old behavior.

The variable assignment feature is most useful for assigning to variables such as `RS`, `OFS`, and `ORS`, which control input and output formats before scanning the data files. It is also useful for controlling state if multiple passes are needed over a data file. For example:

```
awk 'pass == 1  { pass 1 stuff }
     pass == 2  { pass 2 stuff }' pass=1 mydata pass=2 mydata
```

Given the variable assignment feature, the '`-F`' option for setting the value of `FS` is not strictly necessary. It remains for historical compatibility.

11.4 The `AWKPATH` Environment Variable

In most `awk` implementations, you must supply a precise path name for each program file, unless the file is in the current directory. But in `gawk`, if the file name supplied to the '`-f`' option does not contain a '`/`', then `gawk` searches a list of directories (called the *search path*), one by one, looking for a file with the specified name.

The search path is a string consisting of directory names separated by colons. `gawk` gets its search path from the `AWKPATH` environment variable. If that variable does not

exist, gawk uses a default path, '.:/usr/local/share/awk'.[2] (Programs written for use by system administrators should use an AWKPATH variable that does not include the current directory, '.'.)

The search path feature is particularly useful for building libraries of useful awk functions. The library files can be placed in a standard directory in the default path and then specified on the command line with a short file name. Otherwise, the full file name would have to be typed for each file.

By using both the '--source' and '-f' options, your command-line awk programs can use facilities in awk library files (see Chapter 12 [A Library of awk Functions], page 181). Path searching is not done if gawk is in compatibility mode. This is true for both '--traditional' and '--posix'. See Section 11.2 [Command-Line Options], page 173.

> **NOTE:** If you want files in the current directory to be found, you must include the current directory in the path, either by including '.' explicitly in the path or by writing a null entry in the path. (A null entry is indicated by starting or ending the path with a colon or by placing two colons next to each other ('::').) If the current directory is not included in the path, then files cannot be found in the current directory. This path search mechanism is identical to the shell's.

Starting with version 3.0, if AWKPATH is not defined in the environment, gawk places its default search path into ENVIRON["AWKPATH"]. This makes it easy to determine the actual search path that gawk will use from within an awk program.

While you can change ENVIRON["AWKPATH"] within your awk program, this has no effect on the running program's behavior. This makes sense: the AWKPATH environment variable is used to find the program source files. Once your program is running, all the files have been found, and gawk no longer needs to use AWKPATH.

11.5 Obsolete Options and/or Features

This section describes features and/or command-line options from previous releases of gawk that are either not available in the current version or that are still supported but deprecated (meaning that they will *not* be in the next release).

For version 3.1 of gawk, there are no deprecated command-line options from the previous version of gawk. The use of 'next file' (two words) for nextfile was deprecated in gawk 3.0 but still worked. Starting with version 3.1, the two-word usage is no longer accepted.

The process-related special files described in Section 4.7.2 [Special Files for Process-Related Information], page 69, work as described, but are now considered deprecated. gawk prints a warning message every time they are used. (Use PROCINFO instead; see Section 6.5.2 [Built-in Variables That Convey Information], page 110.) They will be removed from the next release of gawk.

---

[2] Your version of gawk may use a different directory; it will depend upon how gawk was built and installed. The actual directory is the value of '$(datadir)' generated when gawk was configured. You probably don't need to worry about this, though.

11.6 Undocumented Options and Features

Use the Source, Luke!
Obi-Wan

This section intentionally left blank.

11.7 Known Bugs in `gawk`

- The '`-F`' option for changing the value of `FS` (see Section 11.2 [Command-Line Options], page 173) is not necessary given the command-line variable assignment feature; it remains only for backward compatibility.
- Syntactically invalid single-character programs tend to overflow the parse stack, generating a rather unhelpful message. Such programs are surprisingly difficult to diagnose in the completely general case, and the effort to do so really is not worth it.

12 A Library of awk Functions

Section 8.2 [User-Defined Functions], page 149, describes how to write your own `awk` functions. Writing functions is important, because it allows you to encapsulate algorithms and program tasks in a single place. It simplifies programming, making program development more manageable, and making programs more readable.

One valuable way to learn a new programming language is to *read* programs in that language. To that end, this chapter and Chapter 13 [Practical `awk` Programs], page 210, provide a good-sized body of code for you to read, and hopefully, to learn from.

This chapter presents a library of useful `awk` functions. Many of the sample programs presented later in this book use these functions. The functions are presented here in a progression from simple to complex.

Section 13.3.7 [Extracting Programs from Texinfo Source Files], page 240, presents a program that you can use to extract the source code for these example library functions and programs from the Texinfo source for this book. (This has already been done as part of the `gawk` distribution.)

If you have written one or more useful, general-purpose `awk` functions and would like to contribute them to the author's collection of `awk` programs, see [How to Contribute], page 8, for more information.

The programs in this chapter and in Chapter 13 [Practical `awk` Programs], page 210, freely use features that are `gawk`-specific. Rewriting these programs for different implementations of awk is pretty straightforward.

Diagnostic error messages are sent to '`/dev/stderr`'. Use '`| "cat 1>&2"`' instead of '`> "/dev/stderr"`' if your system does not have a '`/dev/stderr`', or if you cannot use `gawk`.

A number of programs use `nextfile` (see Section 6.4.9 [Using `gawk`'s `nextfile` Statement], page 106) to skip any remaining input in the input file. Section 12.2.1 [Implementing `nextfile` as a Function], page 183, shows you how to write a function that does the same thing.

Finally, some of the programs choose to ignore upper- and lowercase distinctions in their input. They do so by assigning one to `IGNORECASE`. You can achieve almost the same effect[1] by adding the following rule to the beginning of the program:

```
# ignore case
{ $0 = tolower($0) }
```

Also, verify that all regexp and string constants used in comparisons use only lowercase letters.

12.1 Naming Library Function Global Variables

Due to the way the `awk` language evolved, variables are either *global* (usable by the entire program) or *local* (usable just by a specific function). There is no intermediate state analogous to `static` variables in C.

Library functions often need to have global variables that they can use to preserve state information between calls to the function—for example, `getopt`'s variable `_opti` (see

[1] The effects are not identical. Output of the transformed record will be in all lowercase, while `IGNORECASE` preserves the original contents of the input record.

Section 12.4 [Processing Command-Line Options], page 196). Such variables are called *private*, since the only functions that need to use them are the ones in the library.

When writing a library function, you should try to choose names for your private variables that will not conflict with any variables used by either another library function or a user's main program. For example, a name like '`i`' or '`j`' is not a good choice, because user programs often use variable names like these for their own purposes.

The example programs shown in this chapter all start the names of their private variables with an underscore ('`_`'). Users generally don't use leading underscores in their variable names, so this convention immediately decreases the chances that the variable name will be accidentally shared with the user's program.

In addition, several of the library functions use a prefix that helps indicate what function or set of functions use the variables—for example, `_pw_byname` in the user database routines (see Section 12.5 [Reading the User Database], page 201). This convention is recommended, since it even further decreases the chance of inadvertent conflict among variable names. Note that this convention is used equally well for variable names and for private function names as well.[2]

As a final note on variable naming, if a function makes global variables available for use by a main program, it is a good convention to start that variable's name with a capital letter—for example, `getopt`'s `Opterr` and `Optind` variables (see Section 12.4 [Processing Command-Line Options], page 196). The leading capital letter indicates that it is global, while the fact that the variable name is not all capital letters indicates that the variable is not one of `awk`'s built-in variables, such as `FS`.

It is also important that *all* variables in library functions that do not need to save state are, in fact, declared local.[3] If this is not done, the variable could accidentally be used in the user's program, leading to bugs that are very difficult to track down:

```
function lib_func(x, y,    l1, l2)
{
    ...
    use variable some_var   # some_var should be local
    ...                     # but is not by oversight
}
```

A different convention, common in the Tcl community, is to use a single associative array to hold the values needed by the library function(s), or "package." This significantly decreases the number of actual global names in use. For example, the functions described in Section 12.5 [Reading the User Database], page 201, might have used array elements `PW_data["inited"]`, `PW_data["total"]`, `PW_data["count"]`, and `PW_data["awklib"]`, instead of `_pw_inited`, `_pw_awklib`, `_pw_total`, and `_pw_count`.

The conventions presented in this section are exactly that: conventions. You are not required to write your programs this way—we merely recommend that you do so.

---

[2] While all the library routines could have been rewritten to use this convention, this was not done, in order to show how my own `awk` programming style has evolved and to provide some basis for this discussion.

[3] `gawk`'s '`--dump-variables`' command-line option is useful for verifying this.

12.2 General Programming

This section presents a number of functions that are of general programming use.

12.2.1 Implementing `nextfile` as a Function

The `nextfile` statement, presented in Section 6.4.9 [Using `gawk`'s `nextfile` Statement], page 106, is a `gawk`-specific extension—it is not available in most other implementations of `awk`. This section shows two versions of a `nextfile` function that you can use to simulate `gawk`'s `nextfile` statement if you cannot use `gawk`.

A first attempt at writing a `nextfile` function is as follows:

```
# nextfile --- skip remaining records in current file
# this should be read in before the "main" awk program

function nextfile()    { _abandon_ = FILENAME; next }
_abandon_ == FILENAME  { next }
```

Because it supplies a rule that must be executed first, this file should be included before the main program. This rule compares the current data file's name (which is always in the `FILENAME` variable) to a private variable named `_abandon_`. If the file name matches, then the action part of the rule executes a `next` statement to go on to the next record. (The use of '`_`' in the variable name is a convention. It is discussed more fully in Section 12.1 [Naming Library Function Global Variables], page 181.)

The use of the `next` statement effectively creates a loop that reads all the records from the current data file. The end of the file is eventually reached and a new data file is opened, changing the value of `FILENAME`. Once this happens, the comparison of `_abandon_` to `FILENAME` fails, and execution continues with the first rule of the "real" program.

The `nextfile` function itself simply sets the value of `_abandon_` and then executes a `next` statement to start the loop.

This initial version has a subtle problem. If the same data file is listed *twice* on the commandline, one right after the other or even with just a variable assignment between them, this code skips right through the file a second time, even though it should stop when it gets to the end of the first occurrence. A second version of `nextfile` that remedies this problem is shown here:

```
# nextfile --- skip remaining records in current file
# correctly handle successive occurrences of the same file

# this should be read in before the "main" awk program

function nextfile()   { _abandon_ = FILENAME; next }

_abandon_ == FILENAME {
      if (FNR == 1)
          _abandon_ = ""
      else
          next
}
```

The `nextfile` function has not changed. It makes `_abandon_` equal to the current file name and then executes a `next` statement. The `next` statement reads the next record and increments `FNR` so that `FNR` is guaranteed to have a value of at least two. However, if `nextfile` is called for the last record in the file, then `awk` closes the current data file and moves on to the next one. Upon doing so, `FILENAME` is set to the name of the new file and `FNR` is reset to one. If this next file is the same as the previous one, `_abandon_` is still equal to `FILENAME`. However, `FNR` is equal to one, telling us that this is a new occurrence of the file and not the one we were reading when the `nextfile` function was executed. In that case, `_abandon_` is reset to the empty string, so that further executions of this rule fail (until the next time that `nextfile` is called).

If `FNR` is not one, then we are still in the original data file and the program executes a `next` statement to skip through it.

An important question to ask at this point is: given that the functionality of `nextfile` can be provided with a library file, why is it built into `gawk`? Adding features for little reason leads to larger, slower programs that are harder to maintain. The answer is that building `nextfile` into `gawk` provides significant gains in efficiency. If the `nextfile` function is executed at the beginning of a large data file, `awk` still has to scan the entire file, splitting it up into records, just to skip over it. The built-in `nextfile` can simply close the file immediately and proceed to the next one, which saves a lot of time. This is particularly important in `awk`, because `awk` programs are generally I/O-bound (i.e., they spend most of their time doing input and output, instead of performing computations).

12.2.2 Converting Strings To Numbers

The `strtonum` function (see Section 8.1.3 [String-Manipulation Functions], page 129) is a `gawk` extension. The following function provides an implementation for other versions of `awk`:

```
# strtonum --- convert string to number

function mystrtonum(str,        ret, chars, n, i, k, c)
{
    if (str ~ /^0[0-7]*$/) {
        # octal
        n = length(str)
        ret = 0
        for (i = 1; i <= n; i++) {
            c = substr(str, i, 1)
            if ((k = index("01234567", c)) > 0)
                k-- # adjust for 1-basing in awk

            ret = ret * 8 + k
        }
    } else if (str ~ /^0[xX][0-9a-fA-f]+/) {
        # hexadecimal
        str = substr(str, 3)    # lop off leading 0x
        n = length(str)
        ret = 0
```

```
        for (i = 1; i <= n; i++) {
            c = substr(str, i, 1)
            c = tolower(c)
            if ((k = index("0123456789", c)) > 0)
                k-- # adjust for 1-basing in awk
            else if ((k = index("abcdef", c)) > 0)
                k += 9

            ret = ret * 16 + k
        }
    } else if (str ~ /^[-+]?([0-9]+([.][0-9]*([Ee][0-9]+)?)?|([.][0-9]+([Ee][-+]?[0-9]
        # decimal number, possibly floating point
        ret = str + 0
    } else
        ret = "NOT-A-NUMBER"

    return ret
}

# BEGIN {     # gawk test harness
#     a[1] = "25"
#     a[2] = ".31"
#     a[3] = "0123"
#     a[4] = "0xdeadBEEF"
#     a[5] = "123.45"
#     a[6] = "1.e3"
#     a[7] = "1.32"
#     a[7] = "1.32E2"
#
#     for (i = 1; i in a; i++)
#         print a[i], strtonum(a[i]), mystrtonum(a[i])
# }
```

The function first looks for C-style octal numbers (base 8). If the input string matches a regular expression describing octal numbers, then `mystrtonum` loops through each character in the string. It sets `k` to the index in `"01234567"` of the current octal digit. Since the return value is one-based, the '`k--`' adjusts `k` so it can be used in computing the return value.

Similar logic applies to the code that checks for and converts a hexadecimal value, which starts with '`0x`' or '`0X`'. The use of `tolower` simplifies the computation for finding the correct numeric value for each hexadecimal digit.

Finally, if the string matches the (rather complicated) regex for a regular decimal integer or floating-point numer, the computation '`ret = str + 0`' lets `awk` convert the value to a number.

A commented-out test program is included, so that the function can be tested with `gawk` and the results compared to the built-in `strtonum` function.

12.2.3 Assertions

When writing large programs, it is often useful to know that a condition or set of conditions is true. Before proceeding with a particular computation, you make a statement about what you believe to be the case. Such a statement is known as an *assertion*. The C language provides an `<assert.h>` header file and corresponding `assert` macro that the programmer can use to make assertions. If an assertion fails, the `assert` macro arranges to print a diagnostic message describing the condition that should have been true but was not, and then it kills the program. In C, using `assert` looks this:

```
#include <assert.h>

int myfunc(int a, double b)
{
     assert(a <= 5 && b >= 17.1);
     ...
}
```

If the assertion fails, the program prints a message similar to this:

```
prog.c:5: assertion failed: a <= 5 && b >= 17.1
```

The C language makes it possible to turn the condition into a string for use in printing the diagnostic message. This is not possible in `awk`, so this `assert` function also requires a string version of the condition that is being tested. Following is the function:

```
# assert --- assert that a condition is true. Otherwise exit.

function assert(condition, string)
{
    if (! condition) {
        printf("%s:%d: assertion failed: %s\n",
            FILENAME, FNR, string) > "/dev/stderr"
        _assert_exit = 1
        exit 1
    }
}

END {
    if (_assert_exit)
        exit 1
}
```

The `assert` function tests the `condition` parameter. If it is false, it prints a message to standard error, using the `string` parameter to describe the failed condition. It then sets the variable `_assert_exit` to one and executes the `exit` statement. The `exit` statement jumps to the `END` rule. If the `END` rules finds `_assert_exit` to be true, it exits immediately.

The purpose of the test in the `END` rule is to keep any other `END` rules from running. When an assertion fails, the program should exit immediately. If no assertions fail, then `_assert_exit` is still false when the `END` rule is run normally, and the rest of the program's `END` rules execute. For all of this to work correctly, '`assert.awk`' must be the first source file read by `awk`. The function can be used in a program in the following way:

```
function myfunc(a, b)
{
     assert(a <= 5 && b >= 17.1, "a <= 5 && b >= 17.1")
     ...
}
```

If the assertion fails, you see a message similar to the following:

```
mydata:1357: assertion failed: a <= 5 && b >= 17.1
```

There is a small problem with this version of `assert`. An `END` rule is automatically added to the program calling `assert`. Normally, if a program consists of just a `BEGIN` rule, the input files and/or standard input are not read. However, now that the program has an `END` rule, `awk` attempts to read the input data files or standard input (see Section 6.1.4.1 [Startup and Cleanup Actions], page 96), most likely causing the program to hang as it waits for input.

There is a simple workaround to this: make sure the `BEGIN` rule always ends with an `exit` statement.

12.2.4 Rounding Numbers

The way `printf` and `sprintf` (see Section 4.5 [Using `printf` Statements for Fancier Printing], page 60) perform rounding often depends upon the system's C `sprintf` subroutine. On many machines, `sprintf` rounding is "unbiased," which means it doesn't always round a trailing '`.5`' up, contrary to naive expectations. In unbiased rounding, '`.5`' rounds to even, rather than always up, so 1.5 rounds to 2 but 4.5 rounds to 4. This means that if you are using a format that does rounding (e.g., `"%.0f"`), you should check what your system does. The following function does traditional rounding; it might be useful if your awk's `printf` does unbiased rounding:

```
# round.awk --- do normal rounding

function round(x,   ival, aval, fraction)
{
   ival = int(x)    # integer part, int() truncates

   # see if fractional part
   if (ival == x)   # no fraction
      return x

   if (x < 0) {
      aval = -x     # absolute value
      ival = int(aval)
      fraction = aval - ival
      if (fraction >= .5)
         return int(x) - 1   # -2.5 --> -3
      else
         return int(x)       # -2.3 --> -2
   } else {
      fraction = x - ival
      if (fraction >= .5)
```

```
            return ival + 1
        else
            return ival
    }
}

# test harness
{ print $0, round($0) }
```

12.2.5 The Cliff Random Number Generator

The Cliff random number generator[4] is a very simple random number generator that "passes the noise sphere test for randomness by showing no structure." It is easily programmed, in less than 10 lines of `awk` code:

```
# cliff_rand.awk --- generate Cliff random numbers

BEGIN { _cliff_seed = 0.1 }

function cliff_rand()
{
    _cliff_seed = (100 * log(_cliff_seed)) % 1
    if (_cliff_seed < 0)
        _cliff_seed = - _cliff_seed
    return _cliff_seed
}
```

This algorithm requires an initial "seed" of 0.1. Each new value uses the current seed as input for the calculation. If the built-in `rand` function (see Section 8.1.2 [Numeric Functions], page 127) isn't random enough, you might try using this function instead.

12.2.6 Translating Between Characters and Numbers

One commercial implementation of `awk` supplies a built-in function, `ord`, which takes a character and returns the numeric value for that character in the machine's character set. If the string passed to `ord` has more than one character, only the first one is used.

The inverse of this function is `chr` (from the function of the same name in Pascal), which takes a number and returns the corresponding character. Both functions are written very nicely in `awk`; there is no real reason to build them into the `awk` interpreter:

```
# ord.awk --- do ord and chr

# Global identifiers:
#    _ord_:        numerical values indexed by characters
#    _ord_init:    function to initialize _ord_

BEGIN    { _ord_init() }

function _ord_init(    low, high, i, t)
```

[4] `http://mathworld.wolfram.com/CliffRandomNumberGenerator.hmtl`

```
{
    low = sprintf("%c", 7) # BEL is ascii 7
    if (low == "\a") {    # regular ascii
        low = 0
        high = 127
    } else if (sprintf("%c", 128 + 7) == "\a") {
        # ascii, mark parity
        low = 128
        high = 255
    } else {        # ebcdic(!)
        low = 0
        high = 255
    }

    for (i = low; i <= high; i++) {
        t = sprintf("%c", i)
        _ord_[t] = i
    }
}
```

Some explanation of the numbers used by `chr` is worthwhile. The most prominent character set in use today is ASCII. Although an 8-bit byte can hold 256 distinct values (from 0 to 255), ASCII only defines characters that use the values from 0 to 127.[5] In the now distant past, at least one minicomputer manufacturer used ASCII, but with mark parity, meaning that the leftmost bit in the byte is always 1. This means that on those systems, characters have numeric values from 128 to 255. Finally, large mainframe systems use the EBCDIC character set, which uses all 256 values. While there are other character sets in use on some older systems, they are not really worth worrying about:

```
function ord(str,    c)
{
    # only first character is of interest
    c = substr(str, 1, 1)
    return _ord_[c]
}

function chr(c)
{
    # force c to be numeric by adding 0
    return sprintf("%c", c + 0)
}

#### test code ####
# BEGIN    \
# {
```

[5] ASCII has been extended in many countries to use the values from 128 to 255 for country-specific characters. If your system uses these extensions, you can simplify `_ord_init` to simply loop from 0 to 255.

```
#    for (;;) {
#        printf("enter a character: ")
#        if (getline var <= 0)
#            break
#        printf("ord(%s) = %d\n", var, ord(var))
#    }
# }
```

An obvious improvement to these functions is to move the code for the `_ord_init` function into the body of the `BEGIN` rule. It was written this way initially for ease of development. There is a "test program" in a `BEGIN` rule, to test the function. It is commented out for production use.

12.2.7 Merging an Array into a String

When doing string processing, it is often useful to be able to join all the strings in an array into one long string. The following function, `join`, accomplishes this task. It is used later in several of the application programs (see Chapter 13 [Practical `awk` Programs], page 210).

Good function design is important; this function needs to be general but it should also have a reasonable default behavior. It is called with an array as well as the beginning and ending indices of the elements in the array to be merged. This assumes that the array indices are numeric—a reasonable assumption since the array was likely created with `split` (see Section 8.1.3 [String-Manipulation Functions], page 129):

```
# join.awk --- join an array into a string

function join(array, start, end, sep,    result, i)
{
    if (sep == "")
       sep = " "
    else if (sep == SUBSEP) # magic value
       sep = ""
    result = array[start]
    for (i = start + 1; i <= end; i++)
        result = result sep array[i]
    return result
}
```

An optional additional argument is the separator to use when joining the strings back together. If the caller supplies a nonempty value, `join` uses it; if it is not supplied, it has a null value. In this case, `join` uses a single blank as a default separator for the strings. If the value is equal to `SUBSEP`, then `join` joins the strings with no separator between them. `SUBSEP` serves as a "magic" value to indicate that there should be no separation between the component strings.[6]

12.2.8 Managing the Time of Day

The `systime` and `strftime` functions described in Section 8.1.5 [Using `gawk`'s Timestamp Functions], page 142, provide the minimum functionality necessary for dealing with the

[6] It would be nice if `awk` had an assignment operator for concatenation. The lack of an explicit operator for concatenation makes string operations more difficult than they really need to be.

time of day in human readable form. While `strftime` is extensive, the control formats are not necessarily easy to remember or intuitively obvious when reading a program.

The following function, `gettimeofday`, populates a user-supplied array with preformatted time information. It returns a string with the current time formatted in the same way as the `date` utility:

```
# gettimeofday.awk --- get the time of day in a usable format


# Returns a string in the format of output of date(1)
# Populates the array argument time with individual values:
#    time["second"]       -- seconds (0 - 59)
#    time["minute"]       -- minutes (0 - 59)
#    time["hour"]         -- hours (0 - 23)
#    time["althour"]      -- hours (0 - 12)
#    time["monthday"]     -- day of month (1 - 31)
#    time["month"]        -- month of year (1 - 12)
#    time["monthname"]    -- name of the month
#    time["shortmonth"]   -- short name of the month
#    time["year"]         -- year modulo 100 (0 - 99)
#    time["fullyear"]     -- full year
#    time["weekday"]      -- day of week (Sunday = 0)
#    time["altweekday"]   -- day of week (Monday = 0)
#    time["dayname"]      -- name of weekday
#    time["shortdayname"] -- short name of weekday
#    time["yearday"]      -- day of year (0 - 365)
#    time["timezone"]     -- abbreviation of timezone name
#    time["ampm"]         -- AM or PM designation
#    time["weeknum"]      -- week number, Sunday first day
#    time["altweeknum"]   -- week number, Monday first day

function gettimeofday(time,    ret, now, i)
{
    # get time once, avoids unnecessary system calls
    now = systime()

    # return date(1)-style output
    ret = strftime("%a %b %d %H:%M:%S %Z %Y", now)

    # clear out target array
    delete time

    # fill in values, force numeric values to be
    # numeric by adding 0
    time["second"]       = strftime("%S", now) + 0
    time["minute"]       = strftime("%M", now) + 0
    time["hour"]         = strftime("%H", now) + 0
```

```
    time["althour"]      = strftime("%I", now) + 0
    time["monthday"]     = strftime("%d", now) + 0
    time["month"]        = strftime("%m", now) + 0
    time["monthname"]    = strftime("%B", now)
    time["shortmonth"]   = strftime("%b", now)
    time["year"]         = strftime("%y", now) + 0
    time["fullyear"]     = strftime("%Y", now) + 0
    time["weekday"]      = strftime("%w", now) + 0
    time["altweekday"]   = strftime("%u", now) + 0
    time["dayname"]      = strftime("%A", now)
    time["shortdayname"] = strftime("%a", now)
    time["yearday"]      = strftime("%j", now) + 0
    time["timezone"]     = strftime("%Z", now)
    time["ampm"]         = strftime("%p", now)
    time["weeknum"]      = strftime("%U", now) + 0
    time["altweeknum"]   = strftime("%W", now) + 0

    return ret
}
```

The string indices are easier to use and read than the various formats required by `strftime`. The `alarm` program presented in Section 13.3.2 [An Alarm Clock Program], page 231, uses this function. A more general design for the `gettimeofday` function would have allowed the user to supply an optional timestamp value to use instead of the current time.

12.3 Data File Management

This section presents functions that are useful for managing command-line data files.

12.3.1 Noting Data File Boundaries

The `BEGIN` and `END` rules are each executed exactly once at the beginning and end of your `awk` program, respectively (see Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96). We (the `gawk` authors) once had a user who mistakenly thought that the `BEGIN` rule is executed at the beginning of each data file and the `END` rule is executed at the end of each data file. When informed that this was not the case, the user requested that we add new special patterns to `gawk`, named `BEGIN_FILE` and `END_FILE`, that would have the desired behavior. He even supplied us the code to do so.

Adding these special patterns to `gawk` wasn't necessary; the job can be done cleanly in `awk` itself, as illustrated by the following library program. It arranges to call two user-supplied functions, `beginfile` and `endfile`, at the beginning and end of each data file. Besides solving the problem in only nine(!) lines of code, it does so *portably*; this works with any implementation of `awk`:

```
# transfile.awk
#
# Give the user a hook for filename transitions
#
```

```
# The user must supply functions beginfile() and endfile()
# that each take the name of the file being started or
# finished, respectively.

FILENAME != _oldfilename \
{
    if (_oldfilename != "")
        endfile(_oldfilename)
    _oldfilename = FILENAME
    beginfile(FILENAME)
}

END   { endfile(FILENAME) }
```

This file must be loaded before the user's "main" program, so that the rule it supplies is executed first.

This rule relies on `awk`'s `FILENAME` variable that automatically changes for each new data file. The current file name is saved in a private variable, `_oldfilename`. If `FILENAME` does not equal `_oldfilename`, then a new data file is being processed and it is necessary to call `endfile` for the old file. Because `endfile` should only be called if a file has been processed, the program first checks to make sure that `_oldfilename` is not the null string. The program then assigns the current file name to `_oldfilename` and calls `beginfile` for the file. Because, like all `awk` variables, `_oldfilename` is initialized to the null string, this rule executes correctly even for the first data file.

The program also supplies an `END` rule to do the final processing for the last file. Because this `END` rule comes before any `END` rules supplied in the "main" program, `endfile` is called first. Once again the value of multiple `BEGIN` and `END` rules should be clear.

This version has same problem as the first version of `nextfile` (see Section 12.2.1 [Implementing `nextfile` as a Function], page 183). If the same data file occurs twice in a row on the command line, then `endfile` and `beginfile` are not executed at the end of the first pass and at the beginning of the second pass. The following version solves the problem:

```
# ftrans.awk --- handle data file transitions
#
# user supplies beginfile() and endfile() functions

FNR == 1 {
    if (_filename_ != "")
        endfile(_filename_)
    _filename_ = FILENAME
    beginfile(FILENAME)
}

END  { endfile(_filename_) }
```

Section 13.2.7 [Counting Things], page 228, shows how this library function can be used and how it simplifies writing the main program.

12.3.2 Rereading the Current File

Another request for a new built-in function was for a `rewind` function that would make it possible to reread the current file. The requesting user didn't want to have to use `getline` (see Section 3.8 [Explicit Input with `getline`], page 51) inside a loop.

However, as long as you are not in the `END` rule, it is quite easy to arrange to immediately close the current input file and then start over with it from the top. For lack of a better name, we'll call it `rewind`:

```
# rewind.awk --- rewind the current file and start over

function rewind(    i)
{
    # shift remaining arguments up
    for (i = ARGC; i > ARGIND; i--)
        ARGV[i] = ARGV[i-1]

    # make sure gawk knows to keep going
    ARGC++

    # make current file next to get done
    ARGV[ARGIND+1] = FILENAME

    # do it
    nextfile
}
```

This code relies on the `ARGIND` variable (see Section 6.5.2 [Built-in Variables That Convey Information], page 110), which is specific to `gawk`. If you are not using `gawk`, you can use ideas presented in the previous section to either update `ARGIND` on your own or modify this code as appropriate.

The `rewind` function also relies on the `nextfile` keyword (see Section 6.4.9 [Using `gawk`'s `nextfile` Statement], page 106). See Section 12.2.1 [Implementing `nextfile` as a Function], page 183, for a function version of `nextfile`.

12.3.3 Checking for Readable Data Files

Normally, if you give `awk` a data file that isn't readable, it stops with a fatal error. There are times when you might want to just ignore such files and keep going. You can do this by prepending the following program to your `awk` program:

```
# readable.awk --- library file to skip over unreadable files

BEGIN {
    for (i = 1; i < ARGC; i++) {
        if (ARGV[i] ~ /^[A-Za-z_][A-Za-z0-9_]*=.*/ \
            || ARGV[i] == "-")
            continue    # assignment or standard input
        else if ((getline junk < ARGV[i]) < 0) # unreadable
            delete ARGV[i]
```

```
        else
            close(ARGV[i])
    }
}
```

In gawk, the getline won't be fatal (unless '--posix' is in force). Removing the element from ARGV with delete skips the file (since it's no longer in the list).

12.3.4 Checking For Zero-length Files

All known awk implementations silently skip over zero-length files. This is a by-product of awk's implicit read-a-record-and-match-against-the-rules loop: when awk tries to read a record from an empty file, it immediately receives an end of file indication, closes the file, and proceeds on to the next command-line data file, *without* executing any user-level awk program code.

Using gawk's ARGIND variable (see Section 6.5 [Built-in Variables], page 107), it is possible to detect when an empty data file has been skipped. Similar to the library file presented in Section 12.3.1 [Noting Data File Boundaries], page 192, the following library file calls a function named zerofile that the user must provide. The arguments passed are the file name and the position in ARGV where it was found:

```
# zerofile.awk --- library file to process empty input files

BEGIN { Argind = 0 }

ARGIND > Argind + 1 {
    for (Argind++; Argind < ARGIND; Argind++)
        zerofile(ARGV[Argind], Argind)
}

ARGIND != Argind { Argind = ARGIND }

END {
    if (ARGIND > Argind)
        for (Argind++; Argind <= ARGIND; Argind++)
            zerofile(ARGV[Argind], Argind)
}
```

The user-level variable Argind allows the awk program to track its progress through ARGV. Whenever the program detects that ARGIND is greater than 'Argind + 1', it means that one or more empty files were skipped. The action then calls zerofile for each such file, incrementing Argind along the way.

The 'Argind != ARGIND' rule simply keeps Argind up to date in the normal case.

Finally, the END rule catches the case of any empty files at the end of the command-line arguments. Note that the test in the condition of the for loop uses the '<=' operator, not <.

As an exercise, you might consider whether this same problem can be solved without relying on gawk's ARGIND variable.

As a second exercise, revise this code to handle the case where an intervening value in `ARGV` is a variable assignment.

12.3.5 Treating Assignments as File Names

Occasionally, you might not want `awk` to process command-line variable assignments (see Section 5.3.2 [Assigning Variables on the Command Line], page 76). In particular, if you have file names that contain an '`=`' character, `awk` treats the file name as an assignment, and does not process it.

Some users have suggested an additional command-line option for `gawk` to disable command-line assignments. However, some simple programming with a library file does the trick:

```
# noassign.awk --- library file to avoid the need for a
# special option that disables command-line assignments

function disable_assigns(argc, argv,    i)
{
    for (i = 1; i < argc; i++)
        if (argv[i] ~ /^[A-Za-z_][A-Za-z_0-9]*=.*/)
            argv[i] = ("./" argv[i])
}

BEGIN {
    if (No_command_assign)
        disable_assigns(ARGC, ARGV)
}
```

You then run your program this way:

```
awk -v No_command_assign=1 -f noassign.awk -f yourprog.awk *
```

The function works by looping through the arguments. It prepends '`./`' to any argument that matches the form of a variable assignment, turning that argument into a file name.

The use of `No_command_assign` allows you to disable command-line assignments at invocation time, by giving the variable a true value. When not set, it is initially zero (i.e., false), so the command-line arguments are left alone.

12.4 Processing Command-Line Options

Most utilities on POSIX compatible systems take options, or "switches," on the command line that can be used to change the way a program behaves. `awk` is an example of such a program (see Section 11.2 [Command-Line Options], page 173). Often, options take *arguments*; i.e., data that the program needs to correctly obey the command-line option. For example, `awk`'s '`-F`' option requires a string to use as the field separator. The first occurrence on the command line of either '`--`' or a string that does not begin with '`-`' ends the options.

Modern Unix systems provide a C function named `getopt` for processing command-line arguments. The programmer provides a string describing the one-letter options. If an option requires an argument, it is followed in the string with a colon. `getopt` is also passed the count and values of the command-line arguments and is called in a loop. `getopt` processes

the command-line arguments for option letters. Each time around the loop, it returns a single character representing the next option letter that it finds, or '?' if it finds an invalid option. When it returns −1, there are no options left on the command line.

When using getopt, options that do not take arguments can be grouped together. Furthermore, options that take arguments require that the argument is present. The argument can immediately follow the option letter, or it can be a separate command-line argument.

Given a hypothetical program that takes three command-line options, '-a', '-b', and '-c', where '-b' requires an argument, all of the following are valid ways of invoking the program:

```
prog -a -b foo -c data1 data2 data3
prog -ac -bfoo -- data1 data2 data3
prog -acbfoo data1 data2 data3
```

Notice that when the argument is grouped with its option, the rest of the argument is considered to be the option's argument. In this example, '-acbfoo' indicates that all of the '-a', '-b', and '-c' options were supplied, and that 'foo' is the argument to the '-b' option.

getopt provides four external variables that the programmer can use:

optind — The index in the argument value array (argv) where the first nonoption command-line argument can be found.

optarg — The string value of the argument to an option.

opterr — Usually getopt prints an error message when it finds an invalid option. Setting opterr to zero disables this feature. (An application might want to print its own error message.)

optopt — The letter representing the command-line option.

The following C fragment shows how getopt might process command-line arguments for awk:

```
int
main(int argc, char *argv[])
{
    ...
    /* print our own message */
    opterr = 0;
    while ((c = getopt(argc, argv, "v:f:F:W:")) != -1) {
        switch (c) {
        case 'f':    /* file */
            ...
            break;
        case 'F':    /* field separator */
            ...
            break;
        case 'v':    /* variable assignment */
            ...
            break;
        case 'W':    /* extension */
```

```
            ...
            break;
        case '?':
        default:
            usage();
            break;
        }
    }
    ...
}
```

As a side point, `gawk` actually uses the GNU `getopt_long` function to process both normal and GNU-style long options (see Section 11.2 [Command-Line Options], page 173).

The abstraction provided by `getopt` is very useful and is quite handy in `awk` programs as well. Following is an `awk` version of `getopt`. This function highlights one of the greatest weaknesses in `awk`, which is that it is very poor at manipulating single characters. Repeated calls to `substr` are necessary for accessing individual characters (see Section 8.1.3 [String-Manipulation Functions], page 129).[7]

The discussion that follows walks through the code a bit at a time:

```
# getopt.awk --- do C library getopt(3) function in awk

# External variables:
#    Optind -- index in ARGV of first nonoption argument
#    Optarg -- string value of argument to current option
#    Opterr -- if nonzero, print our own diagnostic
#    Optopt -- current option letter

# Returns:
#    -1     at end of options
#    ?      for unrecognized option
#    <c>    a character representing the current option

# Private Data:
#    _opti  -- index in multi-flag option, e.g., -abc
```

The function starts out with a list of the global variables it uses, what the return values are, what they mean, and any global variables that are "private" to this library function. Such documentation is essential for any program, and particularly for library functions.

The `getopt` function first checks that it was indeed called with a string of options (the `options` parameter). If `options` has a zero length, `getopt` immediately returns -1:

```
function getopt(argc, argv, options,    thisopt, i)
{
    if (length(options) == 0)    # no options given
        return -1
```

[7] This function was written before `gawk` acquired the ability to split strings into single characters using `""` as the separator. We have left it alone, since using `substr` is more portable.

```
if (argv[Optind] == "--") {  # all done
    Optind++
    _opti = 0
    return -1
} else if (argv[Optind] !~ /^-[^: \t\n\f\r\v\b]/) {
    _opti = 0
    return -1
}
```

The next thing to check for is the end of the options. A '`--`' ends the command-line options, as does any command-line argument that does not begin with a '`-`'. `Optind` is used to step through the array of command-line arguments; it retains its value across calls to `getopt`, because it is a global variable.

The regular expression that is used, `/^-[^: \t\n\f\r\v\b]/`, is perhaps a bit of overkill; it checks for a '`-`' followed by anything that is not whitespace and not a colon. If the current command-line argument does not match this pattern, it is not an option, and it ends option processing:

```
if (_opti == 0)
    _opti = 2
thisopt = substr(argv[Optind], _opti, 1)
Optopt = thisopt
i = index(options, thisopt)
if (i == 0) {
    if (Opterr)
        printf("%c -- invalid option\n",
                                thisopt) > "/dev/stderr"
    if (_opti >= length(argv[Optind])) {
        Optind++
        _opti = 0
    } else
        _opti++
    return "?"
}
```

The `_opti` variable tracks the position in the current command-line argument (`argv[Optind]`). If multiple options are grouped together with one '`-`' (e.g., '`-abx`'), it is necessary to return them to the user one at a time.

If `_opti` is equal to zero, it is set to two, which is the index in the string of the next character to look at (we skip the '`-`', which is at position one). The variable `thisopt` holds the character, obtained with `substr`. It is saved in `Optopt` for the main program to use.

If `thisopt` is not in the `options` string, then it is an invalid option. If `Opterr` is nonzero, `getopt` prints an error message on the standard error that is similar to the message from the C version of `getopt`.

Because the option is invalid, it is necessary to skip it and move on to the next option character. If `_opti` is greater than or equal to the length of the current command-line argument, it is necessary to move on to the next argument, so `Optind` is incremented and `_opti` is reset to zero. Otherwise, `Optind` is left alone and `_opti` is merely incremented.

In any case, because the option is invalid, `getopt` returns '`?`'. The main program can examine `Optopt` if it needs to know what the invalid option letter actually is. Continuing on:

```
        if (substr(options, i + 1, 1) == ":") {
            # get option argument
            if (length(substr(argv[Optind], _opti + 1)) > 0)
                Optarg = substr(argv[Optind], _opti + 1)
            else
                Optarg = argv[++Optind]
            _opti = 0
        } else
            Optarg = ""
```

If the option requires an argument, the option letter is followed by a colon in the `options` string. If there are remaining characters in the current command-line argument (`argv[Optind]`), then the rest of that string is assigned to `Optarg`. Otherwise, the next command-line argument is used ('`-xFOO`' versus '`-x FOO`'). In either case, `_opti` is reset to zero, because there are no more characters left to examine in the current command-line argument. Continuing:

```
        if (_opti == 0 || _opti >= length(argv[Optind])) {
            Optind++
            _opti = 0
        } else
            _opti++
        return thisopt
    }
```

Finally, if `_opti` is either zero or greater than the length of the current command-line argument, it means this element in `argv` is through being processed, so `Optind` is incremented to point to the next element in `argv`. If neither condition is true, then only `_opti` is incremented, so that the next option letter can be processed on the next call to `getopt`.

The `BEGIN` rule initializes both `Opterr` and `Optind` to one. `Opterr` is set to one, since the default behavior is for `getopt` to print a diagnostic message upon seeing an invalid option. `Optind` is set to one, since there's no reason to look at the program name, which is in `ARGV[0]`:

```
    BEGIN {
        Opterr = 1    # default is to diagnose
        Optind = 1    # skip ARGV[0]

        # test program
        if (_getopt_test) {
            while ((_go_c = getopt(ARGC, ARGV, "ab:cd")) != -1)
                printf("c = <%c>, optarg = <%s>\n",
                                            _go_c, Optarg)
            printf("non-option arguments:\n")
            for (; Optind < ARGC; Optind++)
```

```
            printf("\tARGV[%d] = <%s>\n",
                                    Optind, ARGV[Optind])
    }
}
```

The rest of the `BEGIN` rule is a simple test program. Here is the result of two sample runs of the test program:

```
$ awk -f getopt.awk -v _getopt_test=1 -- -a -cbARG bax -x
⊣ c = <a>, optarg = <>
⊣ c = <c>, optarg = <>
⊣ c = <b>, optarg = <ARG>
⊣ non-option arguments:
⊣          ARGV[3] = <bax>
⊣          ARGV[4] = <-x>

$ awk -f getopt.awk -v _getopt_test=1 -- -a -x -- xyz abc
⊣ c = <a>, optarg = <>
error  x -- invalid option
⊣ c = <?>, optarg = <>
⊣ non-option arguments:
⊣          ARGV[4] = <xyz>
⊣          ARGV[5] = <abc>
```

In both runs, the first '`--`' terminates the arguments to `awk`, so that it does not try to interpret the '`-a`', etc., as its own options. Several of the sample programs presented in Chapter 13 [Practical `awk` Programs], page 210, use `getopt` to process their arguments.

12.5 Reading the User Database

The `PROCINFO` array (see Section 6.5 [Built-in Variables], page 107) provides access to the current user's real and effective user and group ID numbers, and if available, the user's supplementary group set. However, because these are numbers, they do not provide very useful information to the average user. There needs to be some way to find the user information associated with the user and group ID numbers. This section presents a suite of functions for retrieving information from the user database. See Section 12.6 [Reading the Group Database], page 205, for a similar suite that retrieves information from the group database.

The POSIX standard does not define the file where user information is kept. Instead, it provides the `<pwd.h>` header file and several C language subroutines for obtaining user information. The primary function is `getpwent`, for "get password entry." The "password" comes from the original user database file, '`/etc/passwd`', which stores user information, along with the encrypted passwords (hence the name).

While an `awk` program could simply read '`/etc/passwd`' directly, this file may not contain complete information about the system's set of users.[8] To be sure you are able to produce a readable and complete version of the user database, it is necessary to write a small C program that calls `getpwent`. `getpwent` is defined as returning a pointer to a `struct`

[8] It is often the case that password information is stored in a network database.

`passwd`. Each time it is called, it returns the next entry in the database. When there are no more entries, it returns `NULL`, the null pointer. When this happens, the C program should call `endpwent` to close the database. Following is `pwcat`, a C program that "cats" the password database:

```
/*
 * pwcat.c
 *
 * Generate a printable version of the password database
 */

#include <stdio.h>
#include <pwd.h>


int
main(argc, argv)
int argc;
char **argv;
{
    struct passwd *p;

    while ((p = getpwent()) != NULL)
        printf("%s:%s:%ld:%ld:%s:%s:%s\n",
            p->pw_name, p->pw_passwd, (long) p->pw_uid,
            (long) p->pw_gid, p->pw_gecos, p->pw_dir, p->pw_shell);

    endpwent();
    return 0;
}
```

If you don't understand C, don't worry about it. The output from `pwcat` is the user database, in the traditional '`/etc/passwd`' format of colon-separated fields. The fields are:

Login name	The user's login name.
Encrypted password	The user's encrypted password. This may not be available on some systems.
User-ID	The user's numeric user ID number.
Group-ID	The user's numeric group ID number.
Full name	The user's full name, and perhaps other information associated with the user.
Home directory	The user's login (or "home") directory (familiar to shell programmers as `$HOME`).
Login shell	The program that is run when the user logs in. This is usually a shell, such as `bash`.

A few lines representative of `pwcat`'s output are as follows:

```
$ pwcat
⊣ root:3Ov02d5VaUPB6:0:1:Operator:/:/bin/sh
⊣ nobody:*:65534:65534::/:
⊣ daemon:*:1:1::/:
⊣ sys:*:2:2::/:/bin/csh
⊣ bin:*:3:3::/bin:
⊣ arnold:xyzzy:2076:10:Arnold Robbins:/home/arnold:/bin/sh
⊣ miriam:yxaay:112:10:Miriam Robbins:/home/miriam:/bin/sh
⊣ andy:abcca2:113:10:Andy Jacobs:/home/andy:/bin/sh
...
```

With that introduction, following is a group of functions for getting user information. There are several functions here, corresponding to the C functions of the same names:

```
# passwd.awk --- access password file information

BEGIN {
    # tailor this to suit your system
    _pw_awklib = "/usr/local/libexec/awk/"
}

function _pw_init(    oldfs, oldrs, olddol0, pwcat, using_fw)
{
    if (_pw_inited)
        return

    oldfs = FS
    oldrs = RS
    olddol0 = $0
    using_fw = (PROCINFO["FS"] == "FIELDWIDTHS")
    FS = ":"
    RS = "\n"

    pwcat = _pw_awklib "pwcat"
    while ((pwcat | getline) > 0) {
        _pw_byname[$1] = $0
        _pw_byuid[$3] = $0
        _pw_bycount[++_pw_total] = $0
    }
    close(pwcat)
    _pw_count = 0
    _pw_inited = 1
    FS = oldfs
    if (using_fw)
        FIELDWIDTHS = FIELDWIDTHS
    RS = oldrs
    $0 = olddol0
}
```

The `BEGIN` rule sets a private variable to the directory where `pwcat` is stored. Because it is used to help out an `awk` library routine, we have chosen to put it in '`/usr/local/libexec/awk`'; however, you might want it to be in a different directory on your system.

The function `_pw_init` keeps three copies of the user information in three associative arrays. The arrays are indexed by username (`_pw_byname`), by user ID number (`_pw_byuid`), and by order of occurrence (`_pw_bycount`). The variable `_pw_inited` is used for efficiency; `_pw_init` needs only to be called once.

Because this function uses `getline` to read information from `pwcat`, it first saves the values of `FS`, `RS`, and `$0`. It notes in the variable `using_fw` whether field splitting with `FIELDWIDTHS` is in effect or not. Doing so is necessary, since these functions could be called from anywhere within a user's program, and the user may have his or her own way of splitting records and fields.

The `using_fw` variable checks `PROCINFO["FS"]`, which is `"FIELDWIDTHS"` if field splitting is being done with `FIELDWIDTHS`. This makes it possible to restore the correct field-splitting mechanism later. The test can only be true for `gawk`. It is false if using `FS` or on some other `awk` implementation.

The main part of the function uses a loop to read database lines, split the line into fields, and then store the line into each array as necessary. When the loop is done, `_pw_init` cleans up by closing the pipeline, setting `_pw_inited` to one, and restoring `FS` (and `FIELDWIDTHS` if necessary), `RS`, and `$0`. The use of `_pw_count` is explained shortly.

The `getpwnam` function takes a username as a string argument. If that user is in the database, it returns the appropriate line. Otherwise, it returns the null string:

```
function getpwnam(name)
{
    _pw_init()
    if (name in _pw_byname)
        return _pw_byname[name]
    return ""
}
```

Similarly, the `getpwuid` function takes a user ID number argument. If that user number is in the database, it returns the appropriate line. Otherwise, it returns the null string:

```
function getpwuid(uid)
{
    _pw_init()
    if (uid in _pw_byuid)
        return _pw_byuid[uid]
    return ""
}
```

The `getpwent` function simply steps through the database, one entry at a time. It uses `_pw_count` to track its current position in the `_pw_bycount` array:

```
function getpwent()
{
    _pw_init()
    if (_pw_count < _pw_total)
```

```
        return _pw_bycount[++_pw_count]
    return ""
}
```

The `endpwent` function resets `_pw_count` to zero, so that subsequent calls to `getpwent` start over again:

```
function endpwent()
{
    _pw_count = 0
}
```

A conscious design decision in this suite was made that each subroutine calls `_pw_init` to initialize the database arrays. The overhead of running a separate process to generate the user database, and the I/O to scan it, are only incurred if the user's main program actually calls one of these functions. If this library file is loaded along with a user's program, but none of the routines are ever called, then there is no extra runtime overhead. (The alternative is move the body of `_pw_init` into a `BEGIN` rule, which always runs `pwcat`. This simplifies the code but runs an extra process that may never be needed.)

In turn, calling `_pw_init` is not too expensive, because the `_pw_inited` variable keeps the program from reading the data more than once. If you are worried about squeezing every last cycle out of your `awk` program, the check of `_pw_inited` could be moved out of `_pw_init` and duplicated in all the other functions. In practice, this is not necessary, since most `awk` programs are I/O-bound, and it clutters up the code.

The `id` program in Section 13.2.3 [Printing out User Information], page 219, uses these functions.

12.6 Reading the Group Database

Much of the discussion presented in Section 12.5 [Reading the User Database], page 201, applies to the group database as well. Although there has traditionally been a well-known file (‘`/etc/group`’) in a well-known format, the POSIX standard only provides a set of C library routines (`<grp.h>` and `getgrent`) for accessing the information. Even though this file may exist, it likely does not have complete information. Therefore, as with the user database, it is necessary to have a small C program that generates the group database as its output.

`grcat`, a C program that “cats” the group database, is as follows:

```
/*
 * grcat.c
 *
 * Generate a printable version of the group database
 */

#include <stdio.h>
#include <grp.h>

int
main(argc, argv)
int argc;
```

```
char **argv;
{
    struct group *g;
    int i;

    while ((g = getgrent()) != NULL) {
        printf("%s:%s:%ld:", g->gr_name, g->gr_passwd,
                                        (long) g->gr_gid);
        for (i = 0; g->gr_mem[i] != NULL; i++) {
            printf("%s", g->gr_mem[i]);
            if (g->gr_mem[i+1] != NULL)
                putchar(',');
        }
        putchar('\n');
    }
    endgrent();
    return 0;
}
```

Each line in the group database represents one group. The fields are separated with colons and represent the following information:

Group name	The group's name.
Group password	The group's encrypted password. In practice, this field is never used; it is usually empty or set to '`*`'.
Group-ID	The group's numeric group ID number; this number should be unique within the file.
Group member list	A comma-separated list of usernames. These users are members of the group. Modern Unix systems allow users to be members of several groups simultaneously. If your system does, then there are elements `"group1"` through `"group`*N*`"` in `PROCINFO` for those group ID numbers. (Note that `PROCINFO` is a `gawk` extension; see Section 6.5 [Built-in Variables], page 107.)

Here is what running `grcat` might produce:

```
$ grcat
⊣ wheel:*:0:arnold
⊣ nogroup:*:65534:
⊣ daemon:*:1:
⊣ kmem:*:2:
⊣ staff:*:10:arnold,miriam,andy
⊣ other:*:20:
...
```

Here are the functions for obtaining information from the group database. There are several, modeled after the C library functions of the same names:

```
# group.awk --- functions for dealing with the group file
```

```
BEGIN    \
{
    # Change to suit your system
    _gr_awklib = "/usr/local/libexec/awk/"
}

function _gr_init(    oldfs, oldrs, olddol0, grcat,
                              using_fw, n, a, i)
{
    if (_gr_inited)
        return

    oldfs = FS
    oldrs = RS
    olddol0 = $0
    using_fw = (PROCINFO["FS"] == "FIELDWIDTHS")
    FS = ":"
    RS = "\n"

    grcat = _gr_awklib "grcat"
    while ((grcat | getline) > 0) {
        if ($1 in _gr_byname)
            _gr_byname[$1] = _gr_byname[$1] "," $4
        else
            _gr_byname[$1] = $0
        if ($3 in _gr_bygid)
            _gr_bygid[$3] = _gr_bygid[$3] "," $4
        else
            _gr_bygid[$3] = $0

        n = split($4, a, "[ \t]*,[ \t]*")
        for (i = 1; i <= n; i++)
            if (a[i] in _gr_groupsbyuser)
                _gr_groupsbyuser[a[i]] = \
                    _gr_groupsbyuser[a[i]] " " $1
            else
                _gr_groupsbyuser[a[i]] = $1

        _gr_bycount[++_gr_count] = $0
    }
    close(grcat)
    _gr_count = 0
    _gr_inited++
    FS = oldfs
    if (using_fw)
        FIELDWIDTHS = FIELDWIDTHS
```

```
        RS = oldrs
        $0 = olddol0
    }
```

The `BEGIN` rule sets a private variable to the directory where `grcat` is stored. Because it is used to help out an `awk` library routine, we have chosen to put it in '`/usr/local/libexec/awk`'. You might want it to be in a different directory on your system.

These routines follow the same general outline as the user database routines (see Section 12.5 [Reading the User Database], page 201). The `_gr_inited` variable is used to ensure that the database is scanned no more than once. The `_gr_init` function first saves `FS`, `FIELDWIDTHS`, `RS`, and `$0`, and then sets `FS` and `RS` to the correct values for scanning the group information.

The group information is stored is several associative arrays. The arrays are indexed by group name (`_gr_byname`), by group ID number (`_gr_bygid`), and by position in the database (`_gr_bycount`). There is an additional array indexed by username (`_gr_groupsbyuser`), which is a space-separated list of groups to which each user belongs.

Unlike the user database, it is possible to have multiple records in the database for the same group. This is common when a group has a large number of members. A pair of such entries might look like the following:

```
tvpeople:*:101:johnny,jay,arsenio
tvpeople:*:101:david,conan,tom,joan
```

For this reason, `_gr_init` looks to see if a group name or group ID number is already seen. If it is, then the usernames are simply concatenated onto the previous list of users. (There is actually a subtle problem with the code just presented. Suppose that the first time there were no names. This code adds the names with a leading comma. It also doesn't check that there is a `$4`.)

Finally, `_gr_init` closes the pipeline to `grcat`, restores `FS` (and `FIELDWIDTHS` if necessary), `RS`, and `$0`, initializes `_gr_count` to zero (it is used later), and makes `_gr_inited` nonzero.

The `getgrnam` function takes a group name as its argument, and if that group exists, it is returned. Otherwise, `getgrnam` returns the null string:

```
function getgrnam(group)
{
    _gr_init()
    if (group in _gr_byname)
        return _gr_byname[group]
    return ""
}
```

The `getgrgid` function is similar, it takes a numeric group ID and looks up the information associated with that group ID:

```
function getgrgid(gid)
{
    _gr_init()
    if (gid in _gr_bygid)
```

```
        return _gr_bygid[gid]
    return ""
}
```

The `getgruser` function does not have a C counterpart. It takes a username and returns the list of groups that have the user as a member:

```
function getgruser(user)
{
    _gr_init()
    if (user in _gr_groupsbyuser)
        return _gr_groupsbyuser[user]
    return ""
}
```

The `getgrent` function steps through the database one entry at a time. It uses `_gr_count` to track its position in the list:

```
function getgrent()
{
    _gr_init()
    if (++_gr_count in _gr_bycount)
        return _gr_bycount[_gr_count]
    return ""
}
```

The `endgrent` function resets `_gr_count` to zero so that `getgrent` can start over again:

```
function endgrent()
{
    _gr_count = 0
}
```

As with the user database routines, each function calls `_gr_init` to initialize the arrays. Doing so only incurs the extra overhead of running `grcat` if these functions are used (as opposed to moving the body of `_gr_init` into a `BEGIN` rule).

Most of the work is in scanning the database and building the various associative arrays. The functions that the user calls are themselves very simple, relying on `awk`'s associative arrays to do work.

The `id` program in Section 13.2.3 [Printing out User Information], page 219, uses these functions.

13 Practical awk Programs

Chapter 12 [A Library of awk Functions], page 181, presents the idea that reading programs in a language contributes to learning that language. This chapter continues that theme, presenting a potpourri of awk programs for your reading enjoyment. There are three sections. The first describes how to run the programs presented in this chapter.

The second presents awk versions of several common POSIX utilities. These are programs that you are hopefully already familiar with, and therefore, whose problems are understood. By reimplementing these programs in awk, you can focus on the awk-related aspects of solving the programming problem.

The third is a grab bag of interesting programs. These solve a number of different data-manipulation and management problems. Many of the programs are short, which emphasizes awk's ability to do a lot in just a few lines of code.

Many of these programs use the library functions presented in Chapter 12 [A Library of awk Functions], page 181.

13.1 Running the Example Programs

To run a given program, you would typically do something like this:

```
awk -f program -- options files
```

Here, *program* is the name of the awk program (such as 'cut.awk'), *options* are any command-line options for the program that start with a '-', and *files* are the actual data files.

If your system supports the '#!' executable interpreter mechanism (see Section 1.1.4 [Executable awk Programs], page 13), you can instead run your program directly:

```
cut.awk -c1-8 myfiles > results
```

If your awk is not gawk, you may instead need to use this:

```
cut.awk -- -c1-8 myfiles > results
```

13.2 Reinventing Wheels for Fun and Profit

This section presents a number of POSIX utilities that are implemented in awk. Reinventing these programs in awk is often enjoyable, because the algorithms can be very clearly expressed, and the code is usually very concise and simple. This is true because awk does so much for you.

It should be noted that these programs are not necessarily intended to replace the installed versions on your system. Instead, their purpose is to illustrate awk language programming for "real world" tasks.

The programs are presented in alphabetical order.

13.2.1 Cutting out Fields and Columns

The cut utility selects, or "cuts," characters or fields from its standard input and sends them to its standard output. Fields are separated by tabs by default, but you may supply a command-line option to change the field *delimiter* (i.e., the field-separator character). cut's definition of fields is less general than awk's.

A common use of `cut` might be to pull out just the login name of logged-on users from the output of `who`. For example, the following pipeline generates a sorted, unique list of the logged-on users:

```
who | cut -c1-8 | sort | uniq
```

The options for `cut` are:

`-c` *list* Use *list* as the list of characters to cut out. Items within the list may be separated by commas, and ranges of characters can be separated with dashes. The list '`1-8,15,22-35`' specifies characters 1 through 8, 15, and 22 through 35.

`-f` *list* Use *list* as the list of fields to cut out.

`-d` *delim* Use *delim* as the field-separator character instead of the tab character.

`-s` Suppress printing of lines that do not contain the field delimiter.

The `awk` implementation of `cut` uses the `getopt` library function (see Section 12.4 [Processing Command-Line Options], page 196) and the `join` library function (see Section 12.2.7 [Merging an Array into a String], page 190).

The program begins with a comment describing the options, the library functions needed, and a `usage` function that prints out a usage message and exits. `usage` is called if invalid arguments are supplied:

```
# cut.awk --- implement cut in awk

# Options:
#    -f list     Cut fields
#    -d c        Field delimiter character
#    -c list     Cut characters
#
#    -s          Suppress lines without the delimiter
#
# Requires getopt and join library functions

function usage(    e1, e2)
{
    e1 = "usage: cut [-f list] [-d c] [-s] [files...]"
    e2 = "usage: cut [-c list] [files...]"
    print e1 > "/dev/stderr"
    print e2 > "/dev/stderr"
    exit 1
}
```

The variables `e1` and `e2` are used so that the function fits nicely on the page.

Next comes a `BEGIN` rule that parses the command-line options. It sets `FS` to a single TAB character, because that is `cut`'s default field separator. The output field separator is also set to be the same as the input field separator. Then `getopt` is used to step through the command-line options. Exactly one of the variables `by_fields` or `by_chars` is set to true, to indicate that processing should be done by fields or by characters, respectively. When cutting by characters, the output field separator is set to the null string:

```
BEGIN    \
{
    FS = "\t"    # default
    OFS = FS
    while ((c = getopt(ARGC, ARGV, "sf:c:d:")) != -1) {
        if (c == "f") {
            by_fields = 1
            fieldlist = Optarg
        } else if (c == "c") {
            by_chars = 1
            fieldlist = Optarg
            OFS = ""
        } else if (c == "d") {
            if (length(Optarg) > 1) {
                printf("Using first character of %s" \
                " for delimiter\n", Optarg) > "/dev/stderr"
                Optarg = substr(Optarg, 1, 1)
            }
            FS = Optarg
            OFS = FS
            if (FS == " ")    # defeat awk semantics
                FS = "[ ]"
        } else if (c == "s")
            suppress++
        else
            usage()
    }

    for (i = 1; i < Optind; i++)
        ARGV[i] = ""
```

Special care is taken when the field delimiter is a space. Using a single space (`" "`) for the value of `FS` is incorrect—`awk` would separate fields with runs of spaces, tabs, and/or newlines, and we want them to be separated with individual spaces. Also, note that after `getopt` is through, we have to clear out all the elements of `ARGV` from 1 to `Optind`, so that `awk` does not try to process the command-line options as file names.

After dealing with the command-line options, the program verifies that the options make sense. Only one or the other of '`-c`' and '`-f`' should be used, and both require a field list. Then the program calls either `set_fieldlist` or `set_charlist` to pull apart the list of fields or characters:

```
    if (by_fields && by_chars)
        usage()

    if (by_fields == 0 && by_chars == 0)
        by_fields = 1    # default

    if (fieldlist == "") {
```

```
            print "cut: needs list for -c or -f" > "/dev/stderr"
            exit 1
        }

        if (by_fields)
            set_fieldlist()
        else
            set_charlist()
    }
```

`set_fieldlist` is used to split the field list apart at the commas and into an array. Then, for each element of the array, it looks to see if it is actually a range, and if so, splits it apart. The range is verified to make sure the first number is smaller than the second. Each number in the list is added to the `flist` array, which simply lists the fields that will be printed. Normal field splitting is used. The program lets `awk` handle the job of doing the field splitting:

```
    function set_fieldlist(        n, m, i, j, k, f, g)
    {
        n = split(fieldlist, f, ",")
        j = 1    # index in flist
        for (i = 1; i <= n; i++) {
            if (index(f[i], "-") != 0) { # a range
                m = split(f[i], g, "-")
                if (m != 2 || g[1] >= g[2]) {
                    printf("bad field list: %s\n",
                                        f[i]) > "/dev/stderr"
                    exit 1
                }
                for (k = g[1]; k <= g[2]; k++)
                    flist[j++] = k
            } else
                flist[j++] = f[i]
        }
        nfields = j - 1
    }
```

The `set_charlist` function is more complicated than `set_fieldlist`. The idea here is to use `gawk`'s `FIELDWIDTHS` variable (see Section 3.6 [Reading Fixed-Width Data], page 47), which describes constant-width input. When using a character list, that is exactly what we have.

Setting up `FIELDWIDTHS` is more complicated than simply listing the fields that need to be printed. We have to keep track of the fields to print and also the intervening characters that have to be skipped. For example, suppose you wanted characters 1 through 8, 15, and 22 through 35. You would use '`-c 1-8,15,22-35`'. The necessary value for `FIELDWIDTHS` is `"8 6 1 6 14"`. This yields five fields, and the fields to print are `$1`, `$3`, and `$5`. The intermediate fields are *filler*, which is stuff in between the desired data. `flist` lists the fields to print, and `t` tracks the complete field list, including filler fields:

```
    function set_charlist(    field, i, j, f, g, t,
```

```
                          filler, last, len)
{
    field = 1   # count total fields
    n = split(fieldlist, f, ",")
    j = 1       # index in flist
    for (i = 1; i <= n; i++) {
        if (index(f[i], "-") != 0) { # range
            m = split(f[i], g, "-")
            if (m != 2 || g[1] >= g[2]) {
                printf("bad character list: %s\n",
                                f[i]) > "/dev/stderr"
                exit 1
            }
            len = g[2] - g[1] + 1
            if (g[1] > 1)  # compute length of filler
                filler = g[1] - last - 1
            else
                filler = 0
            if (filler)
                t[field++] = filler
            t[field++] = len  # length of field
            last = g[2]
            flist[j++] = field - 1
        } else {
            if (f[i] > 1)
                filler = f[i] - last - 1
            else
                filler = 0
            if (filler)
                t[field++] = filler
            t[field++] = 1
            last = f[i]
            flist[j++] = field - 1
        }
    }
    FIELDWIDTHS = join(t, 1, field - 1)
    nfields = j - 1
}
```

Next is the rule that actually processes the data. If the '`-s`' option is given, then `suppress` is true. The first `if` statement makes sure that the input record does have the field separator. If `cut` is processing fields, `suppress` is true, and the field separator character is not in the record, then the record is skipped.

If the record is valid, then `gawk` has split the data into fields, either using the character in `FS` or using fixed-length fields and `FIELDWIDTHS`. The loop goes through the list of fields that should be printed. The corresponding field is printed if it contains data. If the next field also has data, then the separator character is written out between the fields:

```
{
    if (by_fields && suppress && index($0, FS) != 0)
        next

    for (i = 1; i <= nfields; i++) {
        if ($flist[i] != "") {
            printf "%s", $flist[i]
            if (i < nfields && $flist[i+1] != "")
                printf "%s", OFS
        }
    }
    print ""
}
```

This version of `cut` relies on `gawk`'s `FIELDWIDTHS` variable to do the character-based cutting. While it is possible in other `awk` implementations to use `substr` (see Section 8.1.3 [String-Manipulation Functions], page 129), it is also extremely painful. The `FIELDWIDTHS` variable supplies an elegant solution to the problem of picking the input line apart by characters.

13.2.2 Searching for Regular Expressions in Files

The `egrep` utility searches files for patterns. It uses regular expressions that are almost identical to those available in `awk` (see Chapter 2 [Regular Expressions], page 24). It is used in the following manner:

```
egrep [ options ] 'pattern' files ...
```

The *pattern* is a regular expression. In typical usage, the regular expression is quoted to prevent the shell from expanding any of the special characters as file name wildcards. Normally, `egrep` prints the lines that matched. If multiple file names are provided on the command line, each output line is preceded by the name of the file and a colon.

The options to `egrep` are as follows:

`-c` Print out a count of the lines that matched the pattern, instead of the lines themselves.

`-s` Be silent. No output is produced and the exit value indicates whether the pattern was matched.

`-v` Invert the sense of the test. `egrep` prints the lines that do *not* match the pattern and exits successfully if the pattern is not matched.

`-i` Ignore case distinctions in both the pattern and the input data.

`-l` Only print (list) the names of the files that matched, not the lines that matched.

`-e` *pattern*
Use *pattern* as the regexp to match. The purpose of the '`-e`' option is to allow patterns that start with a '`-`'.

This version uses the `getopt` library function (see Section 12.4 [Processing Command-Line Options], page 196) and the file transition library program (see Section 12.3.1 [Noting Data File Boundaries], page 192).

The program begins with a descriptive comment and then a `BEGIN` rule that processes the command-line arguments with `getopt`. The '`-i`' (ignore case) option is particularly easy with `gawk`; we just use the `IGNORECASE` built-in variable (see Section 6.5 [Built-in Variables], page 107):

```
# egrep.awk --- simulate egrep in awk

# Options:
#    -c    count of lines
#    -s    silent - use exit value
#    -v    invert test, success if no match
#    -i    ignore case
#    -l    print filenames only
#    -e    argument is pattern
#
# Requires getopt and file transition library functions

BEGIN {
    while ((c = getopt(ARGC, ARGV, "ce:svil")) != -1) {
        if (c == "c")
            count_only++
        else if (c == "s")
            no_print++
        else if (c == "v")
            invert++
        else if (c == "i")
            IGNORECASE = 1
        else if (c == "l")
            filenames_only++
        else if (c == "e")
            pattern = Optarg
        else
            usage()
    }
```

Next comes the code that handles the `egrep`-specific behavior. If no pattern is supplied with '`-e`', the first nonoption on the command line is used. The `awk` command-line arguments up to `ARGV[Optind]` are cleared, so that `awk` won't try to process them as files. If no files are specified, the standard input is used, and if multiple files are specified, we make sure to note this so that the file names can precede the matched lines in the output:

```
    if (pattern == "")
        pattern = ARGV[Optind++]

    for (i = 1; i < Optind; i++)
        ARGV[i] = ""
    if (Optind >= ARGC) {
        ARGV[1] = "-"
        ARGC = 2
```

```
    } else if (ARGC - Optind > 1)
        do_filenames++

#    if (IGNORECASE)
#        pattern = tolower(pattern)
}
```

The last two lines are commented out, since they are not needed in `gawk`. They should be uncommented if you have to use another version of `awk`.

The next set of lines should be uncommented if you are not using `gawk`. This rule translates all the characters in the input line into lowercase if the '`-i`' option is specified.[1] The rule is commented out since it is not necessary with `gawk`:

```
#{
#    if (IGNORECASE)
#        $0 = tolower($0)
#}
```

The `beginfile` function is called by the rule in '`ftrans.awk`' when each new file is processed. In this case, it is very simple; all it does is initialize a variable `fcount` to zero. `fcount` tracks how many lines in the current file matched the pattern (naming the parameter `junk` shows we know that `beginfile` is called with a parameter, but that we're not interested in its value):

```
function beginfile(junk)
{
    fcount = 0
}
```

The `endfile` function is called after each file has been processed. It affects the output only when the user wants a count of the number of lines that matched. `no_print` is true only if the exit status is desired. `count_only` is true if line counts are desired. `egrep` therefore only prints line counts if printing and counting are enabled. The output format must be adjusted depending upon the number of files to process. Finally, `fcount` is added to `total`, so that we know the total number of lines that matched the pattern:

```
function endfile(file)
{
    if (! no_print && count_only)
        if (do_filenames)
            print file ":" fcount
        else
            print fcount

    total += fcount
}
```

The following rule does most of the work of matching lines. The variable `matches` is true if the line matched the pattern. If the user wants lines that did not match, the sense of `matches` is inverted using the '`!`' operator. `fcount` is incremented with the value of

[1] It also introduces a subtle bug; if a match happens, we output the translated line, not the original.

`matches`, which is either one or zero, depending upon a successful or unsuccessful match. If the line does not match, the `next` statement just moves on to the next record.

A number of additional tests are made, but they are only done if we are not counting lines. First, if the user only wants exit status (`no_print` is true), then it is enough to know that *one* line in this file matched, and we can skip on to the next file with `nextfile`. Similarly, if we are only printing file names, we can print the file name, and then skip to the next file with `nextfile`. Finally, each line is printed, with a leading file name and colon if necessary:

```
{
    matches = ($0 ~ pattern)
    if (invert)
        matches = ! matches

    fcount += matches    # 1 or 0

    if (! matches)
        next

    if (! count_only) {
        if (no_print)
            nextfile

        if (filenames_only) {
            print FILENAME
            nextfile
        }

        if (do_filenames)
            print FILENAME ":" $0
        else
            print
    }
}
```

The `END` rule takes care of producing the correct exit status. If there are no matches, the exit status is one; otherwise it is zero:

```
END    \
{
    if (total == 0)
        exit 1
    exit 0
}
```

The `usage` function prints a usage message in case of invalid options, and then exits:

```
function usage(    e)
{
    e = "Usage: egrep [-csvil] [-e pat] [files ...]"
```

```
    e = e "\n\tegrep [-csvil] pat [files ...]"
    print e > "/dev/stderr"
    exit 1
}
```

The variable `e` is used so that the function fits nicely on the printed page.

Just a note on programming style: you may have noticed that the `END` rule uses backslash continuation, with the open brace on a line by itself. This is so that it more closely resembles the way functions are written. Many of the examples in this chapter use this style. You can decide for yourself if you like writing your `BEGIN` and `END` rules this way or not.

13.2.3 Printing out User Information

The `id` utility lists a user's real and effective user ID numbers, real and effective group ID numbers, and the user's group set, if any. `id` only prints the effective user ID and group ID if they are different from the real ones. If possible, `id` also supplies the corresponding user and group names. The output might look like this:

```
$ id
⊣ uid=2076(arnold) gid=10(staff) groups=10(staff),4(tty)
```

This information is part of what is provided by `gawk`'s `PROCINFO` array (see Section 6.5 [Built-in Variables], page 107). However, the `id` utility provides a more palatable output than just individual numbers.

Here is a simple version of `id` written in `awk`. It uses the user database library functions (see Section 12.5 [Reading the User Database], page 201) and the group database library functions (see Section 12.6 [Reading the Group Database], page 205):

The program is fairly straightforward. All the work is done in the `BEGIN` rule. The user and group ID numbers are obtained from `PROCINFO`. The code is repetitive. The entry in the user database for the real user ID number is split into parts at the ':'. The name is the first field. Similar code is used for the effective user ID number and the group numbers:

```
# id.awk --- implement id in awk
#
# Requires user and group library functions

# output is:
# uid=12(foo) euid=34(bar) gid=3(baz) \
#             egid=5(blat) groups=9(nine),2(two),1(one)

BEGIN    \
{
    uid = PROCINFO["uid"]
    euid = PROCINFO["euid"]
    gid = PROCINFO["gid"]
    egid = PROCINFO["egid"]

    printf("uid=%d", uid)
    pw = getpwuid(uid)
    if (pw != "") {
```

```
        split(pw, a, ":")
        printf("(%s)", a[1])
    }

    if (euid != uid) {
        printf(" euid=%d", euid)
        pw = getpwuid(euid)
        if (pw != "") {
            split(pw, a, ":")
            printf("(%s)", a[1])
        }
    }

    printf(" gid=%d", gid)
    pw = getgrgid(gid)
    if (pw != "") {
        split(pw, a, ":")
        printf("(%s)", a[1])
    }

    if (egid != gid) {
        printf(" egid=%d", egid)
        pw = getgrgid(egid)
        if (pw != "") {
            split(pw, a, ":")
            printf("(%s)", a[1])
        }
    }

    for (i = 1; ("group" i) in PROCINFO; i++) {
        if (i == 1)
            printf(" groups=")
        group = PROCINFO["group" i]
        printf("%d", group)
        pw = getgrgid(group)
        if (pw != "") {
            split(pw, a, ":")
            printf("(%s)", a[1])
        }
        if (("group" (i+1)) in PROCINFO)
            printf(",")
    }

    print ""
}
```

The test in the `for` loop is worth noting. Any supplementary groups in the `PROCINFO` array have the indices `"group1"` through `"group`*N*`"` for some *N*, i.e., the total number of supplementary groups. However, we don't know in advance how many of these groups there are.

This loop works by starting at one, concatenating the value with `"group"`, and then using `in` to see if that value is in the array. Eventually, `i` is incremented past the last group in the array and the loop exits.

The loop is also correct if there are *no* supplementary groups; then the condition is false the first time it's tested, and the loop body never executes.

13.2.4 Splitting a Large File into Pieces

The `split` program splits large text files into smaller pieces. Usage is as follows:

```
split [-count] file [ prefix ]
```

By default, the output files are named '`xaa`', '`xab`', and so on. Each file has 1000 lines in it, with the likely exception of the last file. To change the number of lines in each file, supply a number on the command line preceded with a minus; e.g., '`-500`' for files with 500 lines in them instead of 1000. To change the name of the output files to something like '`myfileaa`', '`myfileab`', and so on, supply an additional argument that specifies the file name prefix.

Here is a version of `split` in `awk`. It uses the `ord` and `chr` functions presented in Section 12.2.6 [Translating Between Characters and Numbers], page 188.

The program first sets its defaults, and then tests to make sure there are not too many arguments. It then looks at each argument in turn. The first argument could be a minus sign followed by a number. If it is, this happens to look like a negative number, so it is made positive, and that is the count of lines. The data file name is skipped over and the final argument is used as the prefix for the output file names:

```
# split.awk --- do split in awk
#
# Requires ord and chr library functions

# usage: split [-num] [file] [outname]

BEGIN {
    outfile = "x"    # default
    count = 1000
    if (ARGC > 4)
        usage()

    i = 1
    if (ARGV[i] ~ /^-[0-9]+$/) {
        count = -ARGV[i]
        ARGV[i] = ""
        i++
    }
    # test argv in case reading from stdin instead of file
```

```
    if (i in ARGV)
        i++    # skip data file name
    if (i in ARGV) {
        outfile = ARGV[i]
        ARGV[i] = ""
    }

    s1 = s2 = "a"
    out = (outfile s1 s2)
}
```

The next rule does most of the work. `tcount` (temporary count) tracks how many lines have been printed to the output file so far. If it is greater than `count`, it is time to close the current file and start a new one. `s1` and `s2` track the current suffixes for the file name. If they are both '`z`', the file is just too big. Otherwise, `s1` moves to the next letter in the alphabet and `s2` starts over again at '`a`':

```
{
    if (++tcount > count) {
        close(out)
        if (s2 == "z") {
            if (s1 == "z") {
                printf("split: %s is too large to split\n",
                       FILENAME) > "/dev/stderr"
                exit 1
            }
            s1 = chr(ord(s1) + 1)
            s2 = "a"
        }
        else
            s2 = chr(ord(s2) + 1)
        out = (outfile s1 s2)
        tcount = 1
    }
    print > out
}
```

The `usage` function simply prints an error message and exits:

```
function usage(   e)
{
    e = "usage: split [-num] [file] [outname]"
    print e > "/dev/stderr"
    exit 1
}
```

The variable `e` is used so that the function fits nicely on the page.

This program is a bit sloppy; it relies on `awk` to automatically close the last file instead of doing it in an `END` rule. It also assumes that letters are contiguous in the character set, which isn't true for EBCDIC systems.

13.2.5 Duplicating Output into Multiple Files

The `tee` program is known as a "pipe fitting." `tee` copies its standard input to its standard output and also duplicates it to the files named on the command line. Its usage is as follows:

```
tee [-a] file ...
```

The '`-a`' option tells `tee` to append to the named files, instead of truncating them and starting over.

The `BEGIN` rule first makes a copy of all the command-line arguments into an array named `copy`. `ARGV[0]` is not copied, since it is not needed. `tee` cannot use `ARGV` directly, since `awk` attempts to process each file name in `ARGV` as input data.

If the first argument is '`-a`', then the flag variable `append` is set to true, and both `ARGV[1]` and `copy[1]` are deleted. If `ARGC` is less than two, then no file names were supplied and `tee` prints a usage message and exits. Finally, `awk` is forced to read the standard input by setting `ARGV[1]` to `"-"` and `ARGC` to two:

```
# tee.awk --- tee in awk

BEGIN    \
{
    for (i = 1; i < ARGC; i++)
        copy[i] = ARGV[i]

    if (ARGV[1] == "-a") {
        append = 1
        delete ARGV[1]
        delete copy[1]
        ARGC--
    }
    if (ARGC < 2) {
        print "usage: tee [-a] file ..." > "/dev/stderr"
        exit 1
    }
    ARGV[1] = "-"
    ARGC = 2
}
```

The single rule does all the work. Since there is no pattern, it is executed for each line of input. The body of the rule simply prints the line into each file on the command line, and then to the standard output:

```
{
    # moving the if outside the loop makes it run faster
    if (append)
        for (i in copy)
            print >> copy[i]
    else
        for (i in copy)
            print > copy[i]
    print
```

```
}
```

It is also possible to write the loop this way:

```
for (i in copy)
    if (append)
        print >> copy[i]
    else
        print > copy[i]
```

This is more concise but it is also less efficient. The '`if`' is tested for each record and for each output file. By duplicating the loop body, the '`if`' is only tested once for each input record. If there are N input records and M output files, the first method only executes N '`if`' statements, while the second executes $N*M$ '`if`' statements.

Finally, the `END` rule cleans up by closing all the output files:

```
END    \
{
    for (i in copy)
        close(copy[i])
}
```

13.2.6 Printing Nonduplicated Lines of Text

The `uniq` utility reads sorted lines of data on its standard input, and by default removes duplicate lines. In other words, it only prints unique lines—hence the name. `uniq` has a number of options. The usage is as follows:

```
uniq [-udc [-n]] [+n] [ input file [ output file ]]
```

The options for `uniq` are:

`-d`
: Pnly print only repeated lines.

`-u`
: Print only nonrepeated lines.

`-c`
: Count lines. This option overrides '`-d`' and '`-u`'. Both repeated and nonrepeated lines are counted.

`-n`
: Skip *n* fields before comparing lines. The definition of fields is similar to `awk`'s default: nonwhitespace characters separated by runs of spaces and/or tabs.

`+n`
: Skip *n* characters before comparing lines. Any fields specified with '`-n`' are skipped first.

`input file`
: Data is read from the input file named on the command line, instead of from the standard input.

`output file`
: The generated output is sent to the named output file, instead of to the standard output.

Normally `uniq` behaves as if both the '`-d`' and '`-u`' options are provided.

`uniq` uses the `getopt` library function (see Section 12.4 [Processing Command-Line Options], page 196) and the `join` library function (see Section 12.2.7 [Merging an Array into a String], page 190).

The program begins with a `usage` function and then a brief outline of the options and their meanings in a comment. The `BEGIN` rule deals with the command-line arguments and options. It uses a trick to get `getopt` to handle options of the form '`-25`', treating such an option as the option letter '`2`' with an argument of '`5`'. If indeed two or more digits are supplied (`Optarg` looks like a number), `Optarg` is concatenated with the option digit and then the result is added to zero to make it into a number. If there is only one digit in the option, then `Optarg` is not needed. In this case, `Optind` must be decremented so that `getopt` processes it next time. This code is admittedly a bit tricky.

If no options are supplied, then the default is taken, to print both repeated and nonrepeated lines. The output file, if provided, is assigned to `outputfile`. Early on, `outputfile` is initialized to the standard output, '`/dev/stdout`':

```
# uniq.awk --- do uniq in awk
#
# Requires getopt and join library functions

function usage(    e)
{
    e = "Usage: uniq [-udc [-n]] [+n] [ in [ out ]]"
    print e > "/dev/stderr"
    exit 1
}

# -c    count lines. overrides -d and -u
# -d    only repeated lines
# -u    only non-repeated lines
# -n    skip n fields
# +n    skip n characters, skip fields first

BEGIN   \
{
    count = 1
    outputfile = "/dev/stdout"
    opts = "udc0:1:2:3:4:5:6:7:8:9:"
    while ((c = getopt(ARGC, ARGV, opts)) != -1) {
        if (c == "u")
            non_repeated_only++
        else if (c == "d")
            repeated_only++
        else if (c == "c")
            do_count++
        else if (index("0123456789", c) != 0) {
            # getopt requires args to options
            # this messes us up for things like -5
            if (Optarg ~ /^[0-9]+$/)
                fcount = (c Optarg) + 0
            else {
```

```
                fcount = c + 0
                Optind--
            }
        } else
            usage()
    }

    if (ARGV[Optind] ~ /^\+[0-9]+$/) {
        charcount = substr(ARGV[Optind], 2) + 0
        Optind++
    }

    for (i = 1; i < Optind; i++)
        ARGV[i] = ""

    if (repeated_only == 0 && non_repeated_only == 0)
        repeated_only = non_repeated_only = 1

    if (ARGC - Optind == 2) {
        outputfile = ARGV[ARGC - 1]
        ARGV[ARGC - 1] = ""
    }
}
```

The following function, `are_equal`, compares the current line, `$0`, to the previous line, `last`. It handles skipping fields and characters. If no field count and no character count are specified, `are_equal` simply returns one or zero depending upon the result of a simple string comparison of `last` and `$0`. Otherwise, things get more complicated. If fields have to be skipped, each line is broken into an array using `split` (see Section 8.1.3 [String-Manipulation Functions], page 129); the desired fields are then joined back into a line using `join`. The joined lines are stored in `clast` and `cline`. If no fields are skipped, `clast` and `cline` are set to `last` and `$0`, respectively. Finally, if characters are skipped, `substr` is used to strip off the leading `charcount` characters in `clast` and `cline`. The two strings are then compared and `are_equal` returns the result:

```
function are_equal(    n, m, clast, cline, alast, aline)
{
    if (fcount == 0 && charcount == 0)
        return (last == $0)

    if (fcount > 0) {
        n = split(last, alast)
        m = split($0, aline)
        clast = join(alast, fcount+1, n)
        cline = join(aline, fcount+1, m)
    } else {
        clast = last
        cline = $0
```

```
    }
    if (charcount) {
        clast = substr(clast, charcount + 1)
        cline = substr(cline, charcount + 1)
    }

    return (clast == cline)
}
```

The following two rules are the body of the program. The first one is executed only for the very first line of data. It sets `last` equal to `$0`, so that subsequent lines of text have something to be compared to.

The second rule does the work. The variable `equal` is one or zero, depending upon the results of `are_equal`'s comparison. If `uniq` is counting repeated lines, and the lines are equal, then it increments the `count` variable. Otherwise, it prints the line and resets `count`, since the two lines are not equal.

If `uniq` is not counting, and if the lines are equal, `count` is incremented. Nothing is printed, since the point is to remove duplicates. Otherwise, if `uniq` is counting repeated lines and more than one line is seen, or if `uniq` is counting nonrepeated lines and only one line is seen, then the line is printed, and `count` is reset.

Finally, similar logic is used in the `END` rule to print the final line of input data:

```
NR == 1 {
    last = $0
    next
}

{
    equal = are_equal()

    if (do_count) {    # overrides -d and -u
        if (equal)
            count++
        else {
            printf("%4d %s\n", count, last) > outputfile
            last = $0
            count = 1    # reset
        }
        next
    }

    if (equal)
        count++
    else {
        if ((repeated_only && count > 1) ||
            (non_repeated_only && count == 1))
                print last > outputfile
        last = $0
```

```
            count = 1
        }
    }

    END {
        if (do_count)
            printf("%4d %s\n", count, last) > outputfile
        else if ((repeated_only && count > 1) ||
                 (non_repeated_only && count == 1))
            print last > outputfile
    }
```

13.2.7 Counting Things

The `wc` (word count) utility counts lines, words, and characters in one or more input files. Its usage is as follows:

```
wc [-lwc] [ files ... ]
```

If no files are specified on the command line, `wc` reads its standard input. If there are multiple files, it also prints total counts for all the files. The options and their meanings are shown in the following list:

`-l` Count only lines.

`-w` Count only words. A "word" is a contiguous sequence of nonwhitespace characters, separated by spaces and/or tabs. Luckily, this is the normal way `awk` separates fields in its input data.

`-c` Count only characters.

Implementing `wc` in `awk` is particularly elegant, since `awk` does a lot of the work for us; it splits lines into words (i.e., fields) and counts them, it counts lines (i.e., records), and it can easily tell us how long a line is.

This uses the `getopt` library function (see Section 12.4 [Processing Command-Line Options], page 196) and the file-transition functions (see Section 12.3.1 [Noting Data File Boundaries], page 192).

This version has one notable difference from traditional versions of `wc`: it always prints the counts in the order lines, words, and characters. Traditional versions note the order of the '`-l`', '`-w`', and '`-c`' options on the command line, and print the counts in that order.

The `BEGIN` rule does the argument processing. The variable `print_total` is true if more than one file is named on the command line:

```
# wc.awk --- count lines, words, characters


# Options:
#    -l    only count lines
#    -w    only count words
#    -c    only count characters
#
# Default is to count lines, words, characters
```

```
#
# Requires getopt and file transition library functions

BEGIN {
    # let getopt print a message about
    # invalid options. we ignore them
    while ((c = getopt(ARGC, ARGV, "lwc")) != -1) {
        if (c == "l")
            do_lines = 1
        else if (c == "w")
            do_words = 1
        else if (c == "c")
            do_chars = 1
    }
    for (i = 1; i < Optind; i++)
        ARGV[i] = ""

    # if no options, do all
    if (! do_lines && ! do_words && ! do_chars)
        do_lines = do_words = do_chars = 1

    print_total = (ARGC - i > 2)
}
```

The `beginfile` function is simple; it just resets the counts of lines, words, and characters to zero, and saves the current file name in `fname`:

```
function beginfile(file)
{
    chars = lines = words = 0
    fname = FILENAME
}
```

The `endfile` function adds the current file's numbers to the running totals of lines, words, and characters.[2] It then prints out those numbers for the file that was just read. It relies on `beginfile` to reset the numbers for the following data file:

```
function endfile(file)
{
    tchars += chars
    tlines += lines
    twords += words
    if (do_lines)
        printf "\t%d", lines
    if (do_words)
        printf "\t%d", words
    if (do_chars)
```

[2] `wc` can't just use the value of `FNR` in `endfile`. If you examine the code in Section 12.3.1 [Noting Data File Boundaries], page 192, you will see that `FNR` has already been reset by the time `endfile` is called.

```
        printf "\t%d", chars
    printf "\t%s\n", fname
}
```

There is one rule that is executed for each line. It adds the length of the record, plus one, to `chars`. Adding one plus the record length is needed because the newline character separating records (the value of `RS`) is not part of the record itself, and thus not included in its length. Next, `lines` is incremented for each line read, and `words` is incremented by the value of `NF`, which is the number of "words" on this line:

```
# do per line
{
    chars += length($0) + 1    # get newline
    lines++
    words += NF
}
```

Finally, the `END` rule simply prints the totals for all the files:

```
END {
    if (print_total) {
        if (do_lines)
            printf "\t%d", tlines
        if (do_words)
            printf "\t%d", twords
        if (do_chars)
            printf "\t%d", tchars
        print "\ttotal"
    }
}
```

13.3 A Grab Bag of `awk` Programs

This section is a large "grab bag" of miscellaneous programs. We hope you find them both interesting and enjoyable.

13.3.1 Finding Duplicated Words in a Document

A common error when writing large amounts of prose is to accidentally duplicate words. Typically you will see this in text as something like "the the program does the following. . ." When the text is online, often the duplicated words occur at the end of one line and the beginning of another, making them very difficult to spot.

This program, '`dupword.awk`', scans through a file one line at a time and looks for adjacent occurrences of the same word. It also saves the last word on a line (in the variable `prev`) for comparison with the first word on the next line.

The first two statements make sure that the line is all lowercase, so that, for example, "The" and "the" compare equal to each other. The next statement replaces nonalphanumeric and nonwhitespace characters with spaces, so that punctuation does not affect the comparison either. The characters are replaced with spaces so that formatting controls don't create nonsense words (e.g., the Texinfo '`@code{NF}`' becomes '`codeNF`' if punctua-

tion is simply deleted). The record is then resplit into fields, yielding just the actual words on the line, and ensuring that there are no empty fields.

If there are no fields left after removing all the punctuation, the current record is skipped. Otherwise, the program loops through each word, comparing it to the previous one:

```
# dupword.awk --- find duplicate words in text

{
    $0 = tolower($0)
    gsub(/[^[:alnum:][:blank:]]/, " ");
    $0 = $0         # re-split
    if (NF == 0)
        next
    if ($1 == prev)
        printf("%s:%d: duplicate %s\n",
            FILENAME, FNR, $1)
    for (i = 2; i <= NF; i++)
        if ($i == $(i-1))
            printf("%s:%d: duplicate %s\n",
                FILENAME, FNR, $i)
    prev = $NF
}
```

13.3.2 An Alarm Clock Program

Nothing cures insomnia like a ringing alarm clock.
Arnold Robbins

The following program is a simple "alarm clock" program. You give it a time of day and an optional message. At the specified time, it prints the message on the standard output. In addition, you can give it the number of times to repeat the message as well as a delay between repetitions.

This program uses the `gettimeofday` function from Section 12.2.8 [Managing the Time of Day], page 190.

All the work is done in the `BEGIN` rule. The first part is argument checking and setting of defaults: the delay, the count, and the message to print. If the user supplied a message without the ASCII BEL character (known as the "alert" character, `"\a"`), then it is added to the message. (On many systems, printing the ASCII BEL generates an audible alert. Thus when the alarm goes off, the system calls attention to itself in case the user is not looking at the computer or terminal.) Here is the program:

```
# alarm.awk --- set an alarm
#
# Requires gettimeofday library function

# usage: alarm time [ "message" [ count [ delay ] ] ]

BEGIN    \
{
```

```
# Initial argument sanity checking
usage1 = "usage: alarm time ['message' [count [delay]]]"
usage2 = sprintf("\t(%s) time ::= hh:mm", ARGV[1])

if (ARGC < 2) {
    print usage1 > "/dev/stderr"
    print usage2 > "/dev/stderr"
    exit 1
} else if (ARGC == 5) {
    delay = ARGV[4] + 0
    count = ARGV[3] + 0
    message = ARGV[2]
} else if (ARGC == 4) {
    count = ARGV[3] + 0
    message = ARGV[2]
} else if (ARGC == 3) {
    message = ARGV[2]
} else if (ARGV[1] !~ /[0-9]?[0-9]:[0-9][0-9]/) {
    print usage1 > "/dev/stderr"
    print usage2 > "/dev/stderr"
    exit 1
}

# set defaults for once we reach the desired time
if (delay == 0)
    delay = 180    # 3 minutes
if (count == 0)
    count = 5
if (message == "")
    message = sprintf("\aIt is now %s!\a", ARGV[1])
else if (index(message, "\a") == 0)
    message = "\a" message "\a"
```

The next section of code turns the alarm time into hours and minutes, converts it (if necessary) to a 24-hour clock, and then turns that time into a count of the seconds since midnight. Next it turns the current time into a count of seconds since midnight. The difference between the two is how long to wait before setting off the alarm:

```
# split up alarm time
split(ARGV[1], atime, ":")
hour = atime[1] + 0    # force numeric
minute = atime[2] + 0  # force numeric

# get current broken down time
gettimeofday(now)

# if time given is 12-hour hours and it's after that
# hour, e.g., 'alarm 5:30' at 9 a.m. means 5:30 p.m.,
```

```
    # then add 12 to real hour
    if (hour < 12 && now["hour"] > hour)
        hour += 12

    # set target time in seconds since midnight
    target = (hour * 60 * 60) + (minute * 60)

    # get current time in seconds since midnight
    current = (now["hour"] * 60 * 60) + \
              (now["minute"] * 60) + now["second"]

    # how long to sleep for
    naptime = target - current
    if (naptime <= 0) {
        print "time is in the past!" > "/dev/stderr"
        exit 1
    }
```

Finally, the program uses the `system` function (see Section 8.1.4 [Input/Output Functions], page 140) to call the `sleep` utility. The `sleep` utility simply pauses for the given number of seconds. If the exit status is not zero, the program assumes that `sleep` was interrupted and exits. If `sleep` exited with an OK status (zero), then the program prints the message in a loop, again using `sleep` to delay for however many seconds are necessary:

```
    # zzzzzz..... go away if interrupted
    if (system(sprintf("sleep %d", naptime)) != 0)
        exit 1

    # time to notify!
    command = sprintf("sleep %d", delay)
    for (i = 1; i <= count; i++) {
        print message
        # if sleep command interrupted, go away
        if (system(command) != 0)
            break
    }

    exit 0
}
```

13.3.3 Transliterating Characters

The system `tr` utility transliterates characters. For example, it is often used to map uppercase letters into lowercase for further processing:

```
generate data | tr 'A-Z' 'a-z' | process data ...
```

`tr` requires two lists of characters.[3] When processing the input, the first character in the first list is replaced with the first character in the second list, the second character in the first list is replaced with the second character in the second list, and so on. If there are more characters in the "from" list than in the "to" list, the last character of the "to" list is used for the remaining characters in the "from" list.

Some time ago, a user proposed that a transliteration function should be added to `gawk`. The following program was written to prove that character transliteration could be done with a user-level function. This program is not as complete as the system `tr` utility but it does most of the job.

The `translate` program demonstrates one of the few weaknesses of standard `awk`: dealing with individual characters is very painful, requiring repeated use of the `substr`, `index`, and `gsub` built-in functions (see Section 8.1.3 [String-Manipulation Functions], page 129).[4] There are two functions. The first, `stranslate`, takes three arguments:

`from` A list of characters from which to translate.

`to` A list of characters to which to translate.

`target` The string on which to do the translation.

Associative arrays make the translation part fairly easy. `t_ar` holds the "to" characters, indexed by the "from" characters. Then a simple loop goes through `from`, one character at a time. For each character in `from`, if the character appears in `target`, `gsub` is used to change it to the corresponding `to` character.

The `translate` function simply calls `stranslate` using `$0` as the target. The main program sets two global variables, `FROM` and `TO`, from the command line, and then changes `ARGV` so that `awk` reads from the standard input.

Finally, the processing rule simply calls `translate` for each record:

```
# translate.awk --- do tr-like stuff

# Bugs: does not handle things like: tr A-Z a-z, it has
# to be spelled out. However, if 'to' is shorter than 'from',
# the last character in 'to' is used for the rest of 'from'.

function stranslate(from, to, target,     lf, lt, t_ar, i, c)
{
    lf = length(from)
    lt = length(to)
    for (i = 1; i <= lt; i++)
        t_ar[substr(from, i, 1)] = substr(to, i, 1)
    if (lt < lf)
        for (; i <= lf; i++)
            t_ar[substr(from, i, 1)] = substr(to, lt, 1)
```

[3] On some older System V systems, `tr` may require that the lists be written as range expressions enclosed in square brackets ('`[a-z]`') and quoted, to prevent the shell from attempting a file name expansion. This is not a feature.

[4] This program was written before `gawk` acquired the ability to split each character in a string into separate array elements.

```
    for (i = 1; i <= lf; i++) {
        c = substr(from, i, 1)
        if (index(target, c) > 0)
            gsub(c, t_ar[c], target)
    }
    return target
}

function translate(from, to)
{
    return $0 = stranslate(from, to, $0)
}

# main program
BEGIN {
    if (ARGC < 3) {
        print "usage: translate from to" > "/dev/stderr"
        exit
    }
    FROM = ARGV[1]
    TO = ARGV[2]
    ARGC = 2
    ARGV[1] = "-"
}

{
    translate(FROM, TO)
    print
}
```

While it is possible to do character transliteration in a user-level function, it is not necessarily efficient, and we (the `gawk` authors) started to consider adding a built-in function. However, shortly after writing this program, we learned that the System V Release 4 `awk` had added the `toupper` and `tolower` functions (see Section 8.1.3 [String-Manipulation Functions], page 129). These functions handle the vast majority of the cases where character transliteration is necessary, and so we chose to simply add those functions to `gawk` as well and then leave well enough alone.

An obvious improvement to this program would be to set up the `t_ar` array only once, in a `BEGIN` rule. However, this assumes that the "from" and "to" lists will never change throughout the lifetime of the program.

13.3.4 Printing Mailing Labels

Here is a "real world"[5] program. This script reads lists of names and addresses and generates mailing labels. Each page of labels has 20 labels on it, 2 across and 10 down. The addresses are guaranteed to be no more than 5 lines of data. Each address is separated from the next by a blank line.

[5] "Real world" is defined as "a program actually used to get something done."

The basic idea is to read 20 labels worth of data. Each line of each label is stored in the `line` array. The single rule takes care of filling the `line` array and printing the page when 20 labels have been read.

The `BEGIN` rule simply sets `RS` to the empty string, so that `awk` splits records at blank lines (see Section 3.1 [How Input Is Split into Records], page 36). It sets `MAXLINES` to 100, since 100 is the maximum number of lines on the page (20 * 5 = 100).

Most of the work is done in the `printpage` function. The label lines are stored sequentially in the `line` array. But they have to print horizontally; `line[1]` next to `line[6]`, `line[2]` next to `line[7]`, and so on. Two loops are used to accomplish this. The outer loop, controlled by `i`, steps through every 10 lines of data; this is each row of labels. The inner loop, controlled by `j`, goes through the lines within the row. As `j` goes from 0 to 4, '`i+j`' is the `j`-th line in the row, and '`i+j+5`' is the entry next to it. The output ends up looking something like this:

```
line 1          line 6
line 2          line 7
line 3          line 8
line 4          line 9
line 5          line 10
...
```

As a final note, an extra blank line is printed at lines 21 and 61, to keep the output lined up on the labels. This is dependent on the particular brand of labels in use when the program was written. You will also note that there are 2 blank lines at the top and 2 blank lines at the bottom.

The `END` rule arranges to flush the final page of labels; there may not have been an even multiple of 20 labels in the data:

```
# labels.awk --- print mailing labels


# Each label is 5 lines of data that may have blank lines.
# The label sheets have 2 blank lines at the top and 2 at
# the bottom.

BEGIN    { RS = "" ; MAXLINES = 100 }

function printpage(    i, j)
{
    if (Nlines <= 0)
        return

    printf "\n\n"        # header

    for (i = 1; i <= Nlines; i += 10) {
        if (i == 21 || i == 61)
            print ""
        for (j = 0; j < 5; j++) {
```

```
            if (i + j > MAXLINES)
                break
            printf "   %-41s %s\n", line[i+j], line[i+j+5]
        }
        print ""
    }

    printf "\n\n"        # footer

    for (i in line)
        line[i] = ""
}

# main rule
{
    if (Count >= 20) {
        printpage()
        Count = 0
        Nlines = 0
    }
    n = split($0, a, "\n")
    for (i = 1; i <= n; i++)
        line[++Nlines] = a[i]
    for (; i <= 5; i++)
        line[++Nlines] = ""
    Count++
}

END    \
{
    printpage()
}
```

13.3.5 Generating Word-Usage Counts

The following `awk` program prints the number of occurrences of each word in its input. It illustrates the associative nature of `awk` arrays by using strings as subscripts. It also demonstrates the '`for` *`index`* `in` *`array`*' mechanism. Finally, it shows how `awk` is used in conjunction with other utility programs to do a useful task of some complexity with a minimum of effort. Some explanations follow the program listing:

```
# Print list of word frequencies
{
    for (i = 1; i <= NF; i++)
        freq[$i]++
}

END {
```

```
    for (word in freq)
        printf "%s\t%d\n", word, freq[word]
}
```

This program has two rules. The first rule, because it has an empty pattern, is executed for every input line. It uses `awk`'s field-accessing mechanism (see Section 3.2 [Examining Fields], page 39) to pick out the individual words from the line, and the built-in variable `NF` (see Section 6.5 [Built-in Variables], page 107) to know how many fields are available. For each input word, it increments an element of the array `freq` to reflect that the word has been seen an additional time.

The second rule, because it has the pattern `END`, is not executed until the input has been exhausted. It prints out the contents of the `freq` table that has been built up inside the first action. This program has several problems that would prevent it from being useful by itself on real text files:

- Words are detected using the `awk` convention that fields are separated just by whitespace. Other characters in the input (except newlines) don't have any special meaning to `awk`. This means that punctuation characters count as part of words.
- The `awk` language considers upper- and lowercase characters to be distinct. Therefore, "bartender" and "Bartender" are not treated as the same word. This is undesirable, since in normal text, words are capitalized if they begin sentences, and a frequency analyzer should not be sensitive to capitalization.
- The output does not come out in any useful order. You're more likely to be interested in which words occur most frequently or in having an alphabetized table of how frequently each word occurs.

The way to solve these problems is to use some of `awk`'s more advanced features. First, we use `tolower` to remove case distinctions. Next, we use `gsub` to remove punctuation characters. Finally, we use the system `sort` utility to process the output of the `awk` script. Here is the new version of the program:

```
# wordfreq.awk --- print list of word frequencies

{
    $0 = tolower($0)    # remove case distinctions
    # remove punctuation
    gsub(/[^[:alnum:]_[:blank:]]/, "", $0)
    for (i = 1; i <= NF; i++)
        freq[$i]++
}

END {
    for (word in freq)
        printf "%s\t%d\n", word, freq[word]
}
```

Assuming we have saved this program in a file named '`wordfreq.awk`', and that the data is in '`file1`', the following pipeline:

```
awk -f wordfreq.awk file1 | sort -k 2nr
```

produces a table of the words appearing in 'file1' in order of decreasing frequency. The awk program suitably massages the data and produces a word frequency table, which is not ordered.

The awk script's output is then sorted by the sort utility and printed on the terminal. The options given to sort specify a sort that uses the second field of each input line (skipping one field), that the sort keys should be treated as numeric quantities (otherwise '15' would come before '5'), and that the sorting should be done in descending (reverse) order.

The sort could even be done from within the program, by changing the END action to:

```
END {
    sort = "sort -k 2nr"
    for (word in freq)
        printf "%s\t%d\n", word, freq[word] | sort
    close(sort)
}
```

This way of sorting must be used on systems that do not have true pipes at the command-line (or batch-file) level. See the general operating system documentation for more information on how to use the sort program.

13.3.6 Removing Duplicates from Unsorted Text

The uniq program (see Section 13.2.6 [Printing Nonduplicated Lines of Text], page 224), removes duplicate lines from *sorted* data.

Suppose, however, you need to remove duplicate lines from a data file but that you want to preserve the order the lines are in. A good example of this might be a shell history file. The history file keeps a copy of all the commands you have entered, and it is not unusual to repeat a command several times in a row. Occasionally you might want to compact the history by removing duplicate entries. Yet it is desirable to maintain the order of the original commands.

This simple program does the job. It uses two arrays. The data array is indexed by the text of each line. For each line, data[$0] is incremented. If a particular line has not been seen before, then data[$0] is zero. In this case, the text of the line is stored in lines[count]. Each element of lines is a unique command, and the indices of lines indicate the order in which those lines are encountered. The END rule simply prints out the lines, in order:

```
# histsort.awk --- compact a shell history file
# Thanks to Byron Rakitzis for the general idea

{
    if (data[$0]++ == 0)
        lines[++count] = $0
}

END {
    for (i = 1; i <= count; i++)
        print lines[i]
}
```

This program also provides a foundation for generating other useful information. For example, using the following `print` statement in the `END` rule indicates how often a particular command is used:

```
print data[lines[i]], lines[i]
```

This works because `data[$0]` is incremented each time a line is seen.

13.3.7 Extracting Programs from Texinfo Source Files

Both this chapter and the previous chapter (Chapter 12 [A Library of `awk` Functions], page 181) present a large number of `awk` programs. If you want to experiment with these programs, it is tedious to have to type them in by hand. Here we present a program that can extract parts of a Texinfo input file into separate files.

This book is written in Texinfo, the GNU project's document formatting language. A single Texinfo source file can be used to produce both printed and online documentation. Texinfo is fully documented in the book *Texinfo—The GNU Documentation Format*, available from the Free Software Foundation.

For our purposes, it is enough to know three things about Texinfo input files:

- The "at" symbol ('`@`') is special in Texinfo, much as the backslash ('\') is in C or `awk`. Literal '`@`' symbols are represented in Texinfo source files as '`@@`'.
- Comments start with either '`@c`' or '`@comment`'. The file-extraction program works by using special comments that start at the beginning of a line.
- Lines containing '`@group`' and '`@end group`' commands bracket example text that should not be split across a page boundary. (Unfortunately, TEX isn't always smart enough to do things exactly right, and we have to give it some help.)

The following program, '`extract.awk`', reads through a Texinfo source file and does two things, based on the special comments. Upon seeing '`@c system ...`', it runs a command, by extracting the command text from the control line and passing it on to the `system` function (see Section 8.1.4 [Input/Output Functions], page 140). Upon seeing '`@c file` *`filename`*', each subsequent line is sent to the file *filename*, until '`@c endfile`' is encountered. The rules in '`extract.awk`' match either '`@c`' or '`@comment`' by letting the '`omment`' part be optional. Lines containing '`@group`' and '`@end group`' are simply removed. '`extract.awk`' uses the `join` library function (see Section 12.2.7 [Merging an Array into a String], page 190).

The example programs in the online Texinfo source for *GAWK: Effective AWK Programming* ('`gawk.texi`') have all been bracketed inside '`file`' and '`endfile`' lines. The `gawk` distribution uses a copy of '`extract.awk`' to extract the sample programs and install many of them in a standard directory where `gawk` can find them. The Texinfo file looks something like this:

```
...
This program has a @code{BEGIN} rule,
that prints a nice message:

@example
@c file examples/messages.awk
BEGIN @{ print "Don't panic!" @}
@c end file
```

```
@end example

It also prints some final advice:

@example
@c file examples/messages.awk
END @{ print "Always avoid bored archeologists!" @}
@c end file
@end example
...
```

'`extract.awk`' begins by setting `IGNORECASE` to one, so that mixed upper- and lowercase letters in the directives won't matter.

The first rule handles calling `system`, checking that a command is given (`NF` is at least three) and also checking that the command exits with a zero exit status, signifying OK:

```
# extract.awk --- extract files and run programs
#                 from texinfo files

BEGIN    { IGNORECASE = 1 }

/^@c(omment)?[ \t]+system/    \
{
    if (NF < 3) {
        e = (FILENAME ":" FNR)
        e = (e  ": badly formed 'system' line")
        print e > "/dev/stderr"
        next
    }
    $1 = ""
    $2 = ""
    stat = system($0)
    if (stat != 0) {
        e = (FILENAME ":" FNR)
        e = (e ": warning: system returned " stat)
        print e > "/dev/stderr"
    }
}
```

The variable `e` is used so that the function fits nicely on the page.

The second rule handles moving data into files. It verifies that a file name is given in the directive. If the file named is not the current file, then the current file is closed. Keeping the current file open until a new file is encountered allows the use of the '`>`' redirection for printing the contents, keeping open file management simple.

The '`for`' loop does the work. It reads lines using `getline` (see Section 3.8 [Explicit Input with `getline`], page 51). For an unexpected end of file, it calls the `unexpected_eof` function. If the line is an "endfile" line, then it breaks out of the loop. If the line is an '`@group`' or '`@end group`' line, then it ignores it and goes on to the next line. Similarly, comments within examples are also ignored.

Most of the work is in the following few lines. If the line has no '`@`' symbols, the program can print it directly. Otherwise, each leading '`@`' must be stripped off. To remove the '`@`' symbols, the line is split into separate elements of the array `a`, using the `split` function (see Section 8.1.3 [String-Manipulation Functions], page 129). The '`@`' symbol is used as the separator character. Each element of `a` that is empty indicates two successive '`@`' symbols in the original line. For each two empty elements ('`@@`' in the original file), we have to add a single '`@`' symbol back in.

When the processing of the array is finished, `join` is called with the value of `SUBSEP`, to rejoin the pieces back into a single line. That line is then printed to the output file:

```
/^@c(omment)?[ \t]+file/    \
{
    if (NF != 3) {
        e = (FILENAME ":" FNR ": badly formed ‘file’ line")
        print e > "/dev/stderr"
        next
    }
    if ($3 != curfile) {
        if (curfile != "")
            close(curfile)
        curfile = $3
    }

    for (;;) {
        if ((getline line) <= 0)
            unexpected_eof()
        if (line ~ /^@c(omment)?[ \t]+endfile/)
            break
        else if (line ~ /^@(end[ \t]+)?group/)
            continue
        else if (line ~ /^@c(omment+)?[ \t]+/)
            continue
        if (index(line, "@") == 0) {
            print line > curfile
            continue
        }
        n = split(line, a, "@")
        # if a[1] == "", means leading @,
        # don't add one back in.
        for (i = 2; i <= n; i++) {
            if (a[i] == "") { # was an @@
                a[i] = "@"
                if (a[i+1] == "")
                    i++
            }
        }
        print join(a, 1, n, SUBSEP) > curfile
```

```
    }
}
```

An important thing to note is the use of the '>' redirection. Output done with '>' only opens the file once; it stays open and subsequent output is appended to the file (see Section 4.6 [Redirecting Output of `print` and `printf`], page 65). This makes it easy to mix program text and explanatory prose for the same sample source file (as has been done here!) without any hassle. The file is only closed when a new data file name is encountered or at the end of the input file.

Finally, the function `unexpected_eof` prints an appropriate error message and then exits. The `END` rule handles the final cleanup, closing the open file:

```
function unexpected_eof() {
    printf("%s:%d: unexpected EOF or error\n",
        FILENAME, FNR) > "/dev/stderr"
    exit 1
}

END {
    if (curfile)
        close(curfile)
}
```

13.3.8 A Simple Stream Editor

The `sed` utility is a stream editor, a program that reads a stream of data, makes changes to it, and passes it on. It is often used to make global changes to a large file or to a stream of data generated by a pipeline of commands. While `sed` is a complicated program in its own right, its most common use is to perform global substitutions in the middle of a pipeline:

```
command1 < orig.data | sed 's/old/new/g' | command2 > result
```

Here, '`s/old/new/g`' tells `sed` to look for the regexp '`old`' on each input line and globally replace it with the text '`new`', i.e., all the occurrences on a line. This is similar to `awk`'s `gsub` function (see Section 8.1.3 [String-Manipulation Functions], page 129).

The following program, '`awksed.awk`', accepts at least two command-line arguments: the pattern to look for and the text to replace it with. Any additional arguments are treated as data file names to process. If none are provided, the standard input is used:

```
# awksed.awk --- do s/foo/bar/g using just print
#    Thanks to Michael Brennan for the idea

function usage()
{
    print "usage: awksed pat repl [files...]" > "/dev/stderr"
    exit 1
}

BEGIN {
    # validate arguments
    if (ARGC < 3)
```

```
        usage()

    RS = ARGV[1]
    ORS = ARGV[2]

    # don't use arguments as files
    ARGV[1] = ARGV[2] = ""
}

# look ma, no hands!
{
    if (RT == "")
        printf "%s", $0
    else
        print
}
```

The program relies on `gawk`'s ability to have `RS` be a regexp, as well as on the setting of `RT` to the actual text that terminates the record (see Section 3.1 [How Input Is Split into Records], page 36).

The idea is to have `RS` be the pattern to look for. `gawk` automatically sets `$0` to the text between matches of the pattern. This is text that we want to keep, unmodified. Then, by setting `ORS` to the replacement text, a simple `print` statement outputs the text we want to keep, followed by the replacement text.

There is one wrinkle to this scheme, which is what to do if the last record doesn't end with text that matches `RS`. Using a `print` statement unconditionally prints the replacement text, which is not correct. However, if the file did not end in text that matches `RS`, `RT` is set to the null string. In this case, we can print `$0` using `printf` (see Section 4.5 [Using `printf` Statements for Fancier Printing], page 60).

The `BEGIN` rule handles the setup, checking for the right number of arguments and calling `usage` if there is a problem. Then it sets `RS` and `ORS` from the command-line arguments and sets `ARGV[1]` and `ARGV[2]` to the null string, so that they are not treated as file names (see Section 6.5.3 [Using `ARGC` and `ARGV`], page 113).

The `usage` function prints an error message and exits. Finally, the single rule handles the printing scheme outlined above, using `print` or `printf` as appropriate, depending upon the value of `RT`.

13.3.9 An Easy Way to Use Library Functions

Using library functions in `awk` can be very beneficial. It encourages code reuse and the writing of general functions. Programs are smaller and therefore clearer. However, using library functions is only easy when writing `awk` programs; it is painful when running them, requiring multiple '`-f`' options. If `gawk` is unavailable, then so too is the `AWKPATH` environment variable and the ability to put `awk` functions into a library directory (see Section 11.2 [Command-Line Options], page 173). It would be nice to be able to write programs in the following manner:

```
# library functions
```

```
@include getopt.awk
@include join.awk
...

# main program
BEGIN {
    while ((c = getopt(ARGC, ARGV, "a:b:cde")) != -1)
        ...
    ...
}
```

The following program, 'igawk.sh', provides this service. It simulates gawk's searching of the AWKPATH variable and also allows *nested* includes; i.e., a file that is included with '@include' can contain further '@include' statements. igawk makes an effort to only include files once, so that nested includes don't accidentally include a library function twice.

igawk should behave just like gawk externally. This means it should accept all of gawk's command-line arguments, including the ability to have multiple source files specified via '-f', and the ability to mix command-line and library source files.

The program is written using the POSIX Shell (sh) command language.[6] It works as follows:

1. Loop through the arguments, saving anything that doesn't represent awk source code for later, when the expanded program is run.
2. For any arguments that do represent awk text, put the arguments into a shell variable that will be expanded. There are two cases:
   a. Literal text, provided with '--source' or '--source='. This text is just appended directly.
   b. Source file names, provided with '-f'. We use a neat trick and append '@include *filename*' to the shell variable's contents. Since the file-inclusion program works the way gawk does, this gets the text of the file included into the program at the correct point.
3. Run an awk program (naturally) over the shell variable's contents to expand '@include' statements. The expanded program is placed in a second shell variable.
4. Run the expanded program with gawk and any other original command-line arguments that the user supplied (such as the data file names).

This program uses shell variables extensively; for storing command line arguments, the text of the awk program that will expand the user's program, for the user's original program, and for the expanded program. Doing so removes some potential problems that might arise were we to use temporary files instead, at the cost of making the script somewhat more complicated.

The initial part of the program turns on shell tracing if the first argument is 'debug'.

The next part loops through all the command-line arguments. There are several cases of interest:

[6] Fully explaining the sh language is beyond the scope of this book. We provide some minimal explanations, but see a good shell programming book if you wish to understand things in more depth.

`--` This ends the arguments to `igawk`. Anything else should be passed on to the user's `awk` program without being evaluated.

`-W` This indicates that the next option is specific to `gawk`. To make argument processing easier, the '`-W`' is appended to the front of the remaining arguments and the loop continues. (This is an `sh` programming trick. Don't worry about it if you are not familiar with `sh`.)

`-v`, `-F` These are saved and passed on to `gawk`.

`-f`, `--file`, `--file=`, `-Wfile=`
The file name is appended to the shell variable `program` with an '`@include`' statement. The `expr` utility is used to remove the leading option part of the argument (e.g., '`--file=`'). (Typical `sh` usage would be to use the `echo` and `sed` utilities to do this work. Unfortunately, some versions of `echo` evaluate escape sequences in their arguments, possibly mangling the program text. Using `expr` avoids this problem.)

`--source`, `--source=`, `-Wsource=`
The source text is appended to `program`.

`--version`, `-Wversion`
`igawk` prints its version number, runs '`gawk --version`' to get the `gawk` version information, and then exits.

If none of the '`-f`', '`--file`', '`-Wfile`', '`--source`', or '`-Wsource`' arguments are supplied, then the first nonoption argument should be the `awk` program. If there are no command-line arguments left, `igawk` prints an error message and exits. Otherwise, the first argument is appended to `program`. In any case, after the arguments have been processed, `program` contains the complete text of the original `awk` program.

The program is as follows:

```
#! /bin/sh
# igawk --- like gawk but do @include processing

if [ "$1" = debug ]
then
    set -x
    shift
fi

# A literal newline, so that program text is formmatted correctly
n='
'

# Initialize variables to empty
program=
opts=

while [ $# -ne 0 ] # loop over arguments
do
```

```
    case $1 in
    --)     shift; break;;

    -W)     shift
            # The ${x?'message here'} construct prints a
            # diagnostic if $x is the null string
            set -- -W"${@?'missing operand'}"
            continue;;

    -[vF])  opts="$opts $1 '${2?'missing operand'}'"
            shift;;

    -[vF]*) opts="$opts '$1'" ;;

    -f)     program="$program$n@include ${2?'missing operand'}"
            shift;;

    -f*)    f=`expr "$1" : '-f\(.*\)'`
            program="$program$n@include $f";;

    -[W-]file=*)
            f=`expr "$1" : '-.file=\(.*\)'`
            program="$program$n@include $f";;

    -[W-]file)
            program="$program$n@include ${2?'missing operand'}"
            shift;;

    -[W-]source=*)
            t=`expr "$1" : '-.source=\(.*\)'`
            program="$program$n$t";;

    -[W-]source)
            program="$program$n${2?'missing operand'}"
            shift;;

    -[W-]version)
            echo igawk: version 2.0 1>&2
            gawk --version
            exit 0 ;;

    -[W-]*) opts="$opts '$1'" ;;

    *)      break;;
    esac
    shift
done
```

```
if [ -z "$program" ]
then
     program=${1?'missing program'}
     shift
fi

# At this point, 'program' has the program.
```

The `awk` program to process '`@include`' directives is stored in the shell variable `expand_prog`. Doing this keeps the shell script readable. The `awk` program reads through the user's program, one line at a time, using `getline` (see Section 3.8 [Explicit Input with `getline`], page 51). The input file names and '`@include`' statements are managed using a stack. As each '`@include`' is encountered, the current file name is "pushed" onto the stack and the file named in the '`@include`' directive becomes the current file name. As each file is finished, the stack is "popped," and the previous input file becomes the current input file again. The process is started by making the original file the first one on the stack.

The `pathto` function does the work of finding the full path to a file. It simulates `gawk`'s behavior when searching the `AWKPATH` environment variable (see Section 11.4 [The `AWKPATH` Environment Variable], page 178). If a file name has a '`/`' in it, no path search is done. Otherwise, the file name is concatenated with the name of each directory in the path, and an attempt is made to open the generated file name. The only way to test if a file can be read in `awk` is to go ahead and try to read it with `getline`; this is what `pathto` does.[7] If the file can be read, it is closed and the file name is returned:

```
expand_prog='

function pathto(file,    i, t, junk)
{
    if (index(file, "/") != 0)
        return file

    for (i = 1; i <= ndirs; i++) {
        t = (pathlist[i] "/" file)
        if ((getline junk < t) > 0) {
            # found it
            close(t)
            return t
        }
    }
    return ""
}
```

The main program is contained inside one `BEGIN` rule. The first thing it does is set up the `pathlist` array that `pathto` uses. After splitting the path on '`:`', null elements are replaced with `"."`, which represents the current directory:

[7] On some very old versions of `awk`, the test '`getline junk < t`' can loop forever if the file exists but is empty. Caveat emptor.

```
BEGIN {
    path = ENVIRON["AWKPATH"]
    ndirs = split(path, pathlist, ":")
    for (i = 1; i <= ndirs; i++) {
        if (pathlist[i] == "")
            pathlist[i] = "."
    }
```

The stack is initialized with `ARGV[1]`, which will be '`/dev/stdin`'. The main loop comes next. Input lines are read in succession. Lines that do not start with '`@include`' are printed verbatim. If the line does start with '`@include`', the file name is in `$2`. `pathto` is called to generate the full path. If it cannot, then we print an error message and continue.

The next thing to check is if the file is included already. The `processed` array is indexed by the full file name of each included file and it tracks this information for us. If the file is seen again, a warning message is printed. Otherwise, the new file name is pushed onto the stack and processing continues.

Finally, when `getline` encounters the end of the input file, the file is closed and the stack is popped. When `stackptr` is less than zero, the program is done:

```
    stackptr = 0
    input[stackptr] = ARGV[1] # ARGV[1] is first file

    for (; stackptr >= 0; stackptr--) {
        while ((getline < input[stackptr]) > 0) {
            if (tolower($1) != "@include") {
                print
                continue
            }
            fpath = pathto($2)
            if (fpath == "") {
                printf("igawk:%s:%d: cannot find %s\n",
                    input[stackptr], FNR, $2) > "/dev/stderr"
                continue
            }
            if (! (fpath in processed)) {
                processed[fpath] = input[stackptr]
                input[++stackptr] = fpath  # push onto stack
            } else
                print $2, "included in", input[stackptr],
                    "already included in",
                    processed[fpath] > "/dev/stderr"
        }
        close(input[stackptr])
    }
}'  # close quote ends 'expand_prog' variable

processed_program='gawk -- "$expand_prog" /dev/stdin <<EOF
$program
```

```
EOF
‘
```

The shell construct ‘*command* `<<` *marker*’ is called a *here document*. Everything in the shell script up to the *marker* is fed to *command* as input. The shell processes the contents of the here document for variable and command substitution (and possibly other things as well, depending upon the shell).

The shell construct ‘‘`...`‘’ is called *command substitution*. The output of the command between the two backquotes (grave accents) is substituted into the command line. It is saved as a single string, even if the results contain whitespace.

The expanded program is saved in the variable `processed_program`. It's done in these steps:

1. Run `gawk` with the ‘`@include`’-processing program (the value of the `expand_prog` shell variable) on standard input.
2. Standard input is the contents of the user's program, from the shell variable `program`. Its contents are fed to `gawk` via a here document.
3. The results of this processing are saved in the shell variable `processed_program` by using command substitution.

The last step is to call `gawk` with the expanded program, along with the original options and command-line arguments that the user supplied.

```
eval gawk $opts -- '"$processed_program"' '"$@"'
```

The `eval` command is a shell construct that reruns the shell's parsing process. This keeps things properly quoted.

This version of `igawk` represents my fourth attempt at this program. There are four key simplifications that make the program work better:

- Using ‘`@include`’ even for the files named with ‘`-f`’ makes building the initial collected `awk` program much simpler; all the ‘`@include`’ processing can be done once.
- Not trying to save the line read with `getline` in the `pathto` function when testing for the file's accessibility for use with the main program simplifies things considerably.
- Using a `getline` loop in the `BEGIN` rule does it all in one place. It is not necessary to call out to a separate loop for processing nested ‘`@include`’ statements.
- Instead of saving the expanded program in a temporary file, putting it in a shell variable avoids some potential security problems. This has the disadvantage that the script relies upon more features of the `sh` language, making it harder to follow for those who aren't familiar with `sh`.

Also, this program illustrates that it is often worthwhile to combine `sh` and `awk` programming together. You can usually accomplish quite a lot, without having to resort to low-level programming in C or C++, and it is frequently easier to do certain kinds of string and argument manipulation using the shell than it is in `awk`.

Finally, `igawk` shows that it is not always necessary to add new features to a program; they can often be layered on top. With `igawk`, there is no real reason to build ‘`@include`’ processing into `gawk` itself.

As an additional example of this, consider the idea of having two files in a directory in the search path:

'`default.awk`'
: This file contains a set of default library functions, such as `getopt` and `assert`.

'`site.awk`'
: This file contains library functions that are specific to a site or installation; i.e., locally developed functions. Having a separate file allows '`default.awk`' to change with new `gawk` releases, without requiring the system administrator to update it each time by adding the local functions.

One user suggested that `gawk` be modified to automatically read these files upon startup. Instead, it would be very simple to modify `igawk` to do this. Since `igawk` can process nested '`@include`' directives, '`default.awk`' could simply contain '`@include`' statements for the desired library functions.

Appendix A The Evolution of the awk Language

This book describes the GNU implementation of `awk`, which follows the POSIX specification. Many long-time `awk` users learned `awk` programming with the original `awk` implementation in Version 7 Unix. (This implementation was the basis for `awk` in Berkeley Unix, through 4.3-Reno. Subsequent versions of Berkeley Unix, and systems derived from 4.4BSD-Lite, use various versions of `gawk` for their `awk`.) This chapter briefly describes the evolution of the `awk` language, with cross-references to other parts of the book where you can find more information.

A.1 Major Changes Between V7 and SVR3.1

The `awk` language evolved considerably between the release of Version 7 Unix (1978) and the new version that was first made generally available in System V Release 3.1 (1987). This section summarizes the changes, with cross-references to further details:

- The requirement for '`;`' to separate rules on a line (see Section 1.6 [`awk` Statements Versus Lines], page 20).
- User-defined functions and the `return` statement (see Section 8.2 [User-Defined Functions], page 149).
- The `delete` statement (see Section 7.6 [The `delete` Statement], page 120).
- The `do-while` statement (see Section 6.4.3 [The `do-while` Statement], page 101).
- The built-in functions `atan2`, `cos`, `sin`, `rand`, and `srand` (see Section 8.1.2 [Numeric Functions], page 127).
- The built-in functions `gsub`, `sub`, and `match` (see Section 8.1.3 [String-Manipulation Functions], page 129).
- The built-in functions `close` and `system` (see Section 8.1.4 [Input/Output Functions], page 140).
- The `ARGC`, `ARGV`, `FNR`, `RLENGTH`, `RSTART`, and `SUBSEP` built-in variables (see Section 6.5 [Built-in Variables], page 107).
- The conditional expression using the ternary operator '`?:`' (see Section 5.12 [Conditional Expressions], page 89).
- The exponentiation operator '`^`' (see Section 5.5 [Arithmetic Operators], page 78) and its assignment operator form '`^=`' (see Section 5.7 [Assignment Expressions], page 81).
- C-compatible operator precedence, which breaks some old `awk` programs (see Section 5.14 [Operator Precedence (How Operators Nest)], page 90).
- Regexps as the value of `FS` (see Section 3.5 [Specifying How Fields Are Separated], page 43) and as the third argument to the `split` function (see Section 8.1.3 [String-Manipulation Functions], page 129).
- Dynamic regexps as operands of the '`~`' and '`!~`' operators (see Section 2.1 [How to Use Regular Expressions], page 24).
- The escape sequences '`\b`', '`\f`', and '`\r`' (see Section 2.2 [Escape Sequences], page 25). (Some vendors have updated their old versions of `awk` to recognize '`\b`', '`\f`', and '`\r`', but this is not something you can rely on.)

- Redirection of input for the `getline` function (see Section 3.8 [Explicit Input with `getline`], page 51).
- Multiple `BEGIN` and `END` rules (see Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96).
- Multidimensional arrays (see Section 7.9 [Multidimensional Arrays], page 122).

A.2 Changes Between SVR3.1 and SVR4

The System V Release 4 (1989) version of Unix `awk` added these features (some of which originated in `gawk`):

- The `ENVIRON` variable (see Section 6.5 [Built-in Variables], page 107).
- Multiple '`-f`' options on the command line (see Section 11.2 [Command-Line Options], page 173).
- The '`-v`' option for assigning variables before program execution begins (see Section 11.2 [Command-Line Options], page 173).
- The '`--`' option for terminating command-line options.
- The '`\a`', '`\v`', and '`\x`' escape sequences (see Section 2.2 [Escape Sequences], page 25).
- A defined return value for the `srand` built-in function (see Section 8.1.2 [Numeric Functions], page 127).
- The `toupper` and `tolower` built-in string functions for case translation (see Section 8.1.3 [String-Manipulation Functions], page 129).
- A cleaner specification for the '`%c`' format-control letter in the `printf` function (see Section 4.5.2 [Format-Control Letters], page 60).
- The ability to dynamically pass the field width and precision (`"%*.*d"`) in the argument list of the `printf` function (see Section 4.5.2 [Format-Control Letters], page 60).
- The use of regexp constants, such as `/foo/`, as expressions, where they are equivalent to using the matching operator, as in '`$0 ~ /foo/`' (see Section 5.2 [Using Regular Expression Constants], page 74).
- Processing of escape sequences inside command-line variable assignments (see Section 5.3.2 [Assigning Variables on the Command Line], page 76).

A.3 Changes Between SVR4 and POSIX `awk`

The POSIX Command Language and Utilities standard for `awk` (1992) introduced the following changes into the language:

- The use of '`-W`' for implementation-specific options (see Section 11.2 [Command-Line Options], page 173).
- The use of `CONVFMT` for controlling the conversion of numbers to strings (see Section 5.4 [Conversion of Strings and Numbers], page 77).
- The concept of a numeric string and tighter comparison rules to go with it (see Section 5.10 [Variable Typing and Comparison Expressions], page 85).
- More complete documentation of many of the previously undocumented features of the language.

The following common extensions are not permitted by the POSIX standard:

- `\x` escape sequences are not recognized (see Section 2.2 [Escape Sequences], page 25).
- Newlines do not act as whitespace to separate fields when `FS` is equal to a single space (see Section 3.2 [Examining Fields], page 39).
- Newlines are not allowed after '`?`' or '`:`' (see Section 5.12 [Conditional Expressions], page 89).
- The synonym `func` for the keyword `function` is not recognized (see Section 8.2.1 [Function Definition Syntax], page 149).
- The operators '`**`' and '`**=`' cannot be used in place of '`^`' and '`^=`' (see Section 5.5 [Arithmetic Operators], page 78, and Section 5.7 [Assignment Expressions], page 81).
- Specifying '`-Ft`' on the command line does not set the value of `FS` to be a single TAB character (see Section 3.5 [Specifying How Fields Are Separated], page 43).
- The `fflush` built-in function is not supported (see Section 8.1.4 [Input/Output Functions], page 140).

A.4 Extensions in the Bell Laboratories `awk`

Brian Kernighan, one of the original designers of Unix `awk`, has made his version available via his home page (see Section B.6 [Other Freely Available `awk` Implementations], page 277). This section describes extensions in his version of `awk` that are not in POSIX `awk`:

- The '`-mf` *N*' and '`-mr` *N*' command-line options to set the maximum number of fields and the maximum record size, respectively (see Section 11.2 [Command-Line Options], page 173). As a side note, his `awk` no longer needs these options; it continues to accept them to avoid breaking old programs.
- The `fflush` built-in function for flushing buffered output (see Section 8.1.4 [Input/Output Functions], page 140).
- The '`**`' and '`**=`' operators (see Section 5.5 [Arithmetic Operators], page 78 and Section 5.7 [Assignment Expressions], page 81).
- The use of `func` as an abbreviation for `function` (see Section 8.2.1 [Function Definition Syntax], page 149).

The Bell Laboratories `awk` also incorporates the following extensions, originally developed for `gawk`:

- The '`\x`' escape sequence (see Section 2.2 [Escape Sequences], page 25).
- The '`/dev/stdin`', '`/dev/stdout`', and '`/dev/stderr`' special files (see Section 4.7 [Special File Names in `gawk`], page 67).
- The ability for `FS` and for the third argument to `split` to be null strings (see Section 3.5.2 [Making Each Character a Separate Field], page 44).
- The `nextfile` statement (see Section 6.4.9 [Using `gawk`'s `nextfile` Statement], page 106).
- The ability to delete all of an array at once with '`delete` *array*' (see Section 7.6 [The `delete` Statement], page 120).

A.5 Extensions in gawk Not in POSIX awk

The GNU implementation, gawk, adds a large number of features. This section lists them in the order they were added to gawk. They can all be disabled with either the '--traditional' or '--posix' options (see Section 11.2 [Command-Line Options], page 173).

Version 2.10 of gawk introduced the following features:

- The AWKPATH environment variable for specifying a path search for the '-f' command-line option (see Section 11.2 [Command-Line Options], page 173).
- The IGNORECASE variable and its effects (see Section 2.6 [Case Sensitivity in Matching], page 32).
- The '/dev/stdin', '/dev/stdout', '/dev/stderr' and '/dev/fd/*N*' special file names (see Section 4.7 [Special File Names in gawk], page 67).

Version 2.13 of gawk introduced the following features:

- The FIELDWIDTHS variable and its effects (see Section 3.6 [Reading Fixed-Width Data], page 47).
- The systime and strftime built-in functions for obtaining and printing timestamps (see Section 8.1.5 [Using gawk's Timestamp Functions], page 142).
- The '-W lint' option to provide error and portability checking for both the source code and at runtime (see Section 11.2 [Command-Line Options], page 173).
- The '-W compat' option to turn off the GNU extensions (see Section 11.2 [Command-Line Options], page 173).
- The '-W posix' option for full POSIX compliance (see Section 11.2 [Command-Line Options], page 173).

Version 2.14 of gawk introduced the following feature:

- The next file statement for skipping to the next data file (see Section 6.4.9 [Using gawk's nextfile Statement], page 106).

Version 2.15 of gawk introduced the following features:

- The ARGIND variable, which tracks the movement of FILENAME through ARGV (see Section 6.5 [Built-in Variables], page 107).
- The ERRNO variable, which contains the system error message when getline returns −1 or close fails (see Section 6.5 [Built-in Variables], page 107).
- The '/dev/pid', '/dev/ppid', '/dev/pgrpid', and '/dev/user' file name interpretation (see Section 4.7 [Special File Names in gawk], page 67).
- The ability to delete all of an array at once with 'delete *array*' (see Section 7.6 [The delete Statement], page 120).
- The ability to use GNU-style long-named options that start with '--' (see Section 11.2 [Command-Line Options], page 173).
- The '--source' option for mixing command-line and library-file source code (see Section 11.2 [Command-Line Options], page 173).

Version 3.0 of gawk introduced the following features:

- IGNORECASE changed, now applying to string comparison as well as regexp operations (see Section 2.6 [Case Sensitivity in Matching], page 32).

- The `RT` variable that contains the input text that matched `RS` (see Section 3.1 [How Input Is Split into Records], page 36).
- Full support for both POSIX and GNU regexps (see Chapter 2 [Regular Expressions], page 24).
- The `gensub` function for more powerful text manipulation (see Section 8.1.3 [String-Manipulation Functions], page 129).
- The `strftime` function acquired a default time format, allowing it to be called with no arguments (see Section 8.1.5 [Using `gawk`'s Timestamp Functions], page 142).
- The ability for `FS` and for the third argument to `split` to be null strings (see Section 3.5.2 [Making Each Character a Separate Field], page 44).
- The ability for `RS` to be a regexp (see Section 3.1 [How Input Is Split into Records], page 36).
- The `next file` statement became `nextfile` (see Section 6.4.9 [Using `gawk`'s `nextfile` Statement], page 106).
- The '`--lint-old`' option to warn about constructs that are not available in the original Version 7 Unix version of `awk` (see Section A.1 [Major Changes Between V7 and SVR3.1], page 252).
- The '`-m`' option and the `fflush` function from the Bell Laboratories research version of `awk` (see Section 11.2 [Command-Line Options], page 173; also see Section 8.1.4 [Input/Output Functions], page 140).
- The '`--re-interval`' option to provide interval expressions in regexps (see Section 2.3 [Regular Expression Operators], page 27).
- The '`--traditional`' option was added as a better name for '`--compat`' (see Section 11.2 [Command-Line Options], page 173).
- The use of GNU Autoconf to control the configuration process (see Section B.2.1 [Compiling `gawk` for Unix], page 264).
- Amiga support (see Section B.3.1 [Installing `gawk` on an Amiga], page 266).

Version 3.1 of `gawk` introduced the following features:

- The `BINMODE` special variable for non-POSIX systems, which allows binary I/O for input and/or output files (see Section B.3.3.4 [Using `gawk` on PC Operating Systems], page 270).
- The `LINT` special variable, which dynamically controls lint warnings (see Section 6.5 [Built-in Variables], page 107).
- The `PROCINFO` array for providing process-related information (see Section 6.5 [Built-in Variables], page 107).
- The `TEXTDOMAIN` special variable for setting an application's internationalization text domain (see Section 6.5 [Built-in Variables], page 107, and Chapter 9 [Internationalization with `gawk`], page 156).
- The ability to use octal and hexadecimal constants in `awk` program source code (see Section 5.1.2 [Octal and Hexadecimal Numbers], page 73).
- The '`|&`' operator for two-way I/O to a coprocess (see Section 10.2 [Two-Way Communications with Another Process], page 166).

- The '`/inet`' special files for TCP/IP networking using '`|&`' (see Section 10.3 [Using `gawk` for Network Programming], page 168).
- The optional second argument to `close` that allows closing one end of a two-way pipe to a coprocess (see Section 10.2 [Two-Way Communications with Another Process], page 166).
- The optional third argument to the `match` function for capturing text-matching subexpressions within a regexp (see Section 8.1.3 [String-Manipulation Functions], page 129).
- Positional specifiers in `printf` formats for making translations easier (see Section 9.4.2 [Rearranging `printf` Arguments], page 160).
- The `asort` and `asorti` functions for sorting arrays (see Section 7.11 [Sorting Array Values and Indices with `gawk`], page 124).
- The `bindtextdomain`, `dcgettext` and `dcngettext` functions for internationalization (see Section 9.3 [Internationalizing `awk` Programs], page 158).
- The `extension` built-in function and the ability to add new built-in functions dynamically (see Section C.3 [Adding New Built-in Functions to `gawk`], page 282).
- The `mktime` built-in function for creating timestamps (see Section 8.1.5 [Using `gawk`'s Timestamp Functions], page 142).
- The `and`, `or`, `xor`, `compl`, `lshift`, `rshift`, and `strtonum` built-in functions (see Section 8.1.6 [Bit-Manipulation Functions of `gawk`], page 147).
- The support for '`next file`' as two words was removed completely (see Section 6.4.9 [Using `gawk`'s `nextfile` Statement], page 106).
- The '`--dump-variables`' option to print a list of all global variables (see Section 11.2 [Command-Line Options], page 173).
- The '`--gen-po`' command-line option and the use of a leading underscore to mark strings that should be translated (see Section 9.4.1 [Extracting Marked Strings], page 160).
- The '`--non-decimal-data`' option to allow non-decimal input data (see Section 10.1 [Allowing Nondecimal Input Data], page 165).
- The '`--profile`' option and `pgawk`, the profiling version of `gawk`, for producing execution profiles of `awk` programs (see Section 10.5 [Profiling Your `awk` Programs], page 169).
- The '`--enable-portals`' configuration option to enable special treatment of pathnames that begin with '`/p`' as BSD portals (see Section 10.4 [Using `gawk` with BSD Portals], page 169).
- The use of GNU Automake to help in standardizing the configuration process (see Section B.2.1 [Compiling `gawk` for Unix], page 264).
- The use of GNU `gettext` for `gawk`'s own message output (see Section 9.6 [`gawk` Can Speak Your Language], page 163).
- BeOS support (see Section B.3.2 [Installing `gawk` on BeOS], page 266).
- Tandem support (see Section B.4.2 [Installing `gawk` on a Tandem], page 275).
- The Atari port became officially unsupported (see Section B.4.1 [Installing `gawk` on the Atari ST], page 274).
- The source code now uses new-style function definitions, with `ansi2knr` to convert the code on systems with old compilers.

- The '`--disable-lint`' configuration option to disable lint checking at compile time (see Section B.2.2 [Additional Configuration Options], page 264).
- POSIX compliance for `sub` and `gsub` (see Section 8.1.3.1 [More About '\' and '`&`' with `sub`, `gsub`, and `gensub`], page 136).

A.6 Major Contributors to `gawk`

> *Always give credit where credit is due.*
> Anonymous

This section names the major contributors to `gawk` and/or this book, in approximate chronological order:

- Dr. Alfred V. Aho, Dr. Peter J. Weinberger, and Dr. Brian W. Kernighan, all of Bell Laboratories, designed and implemented Unix `awk`, from which `gawk` gets the majority of its feature set.
- Paul Rubin did the initial design and implementation in 1986, and wrote the first draft (around 40 pages) of this book.
- Jay Fenlason finished the initial implementation.
- Diane Close revised the first draft of this book, bringing it to around 90 pages.
- Richard Stallman helped finish the implementation and the initial draft of this book. He is also the founder of the FSF and the GNU project.
- John Woods contributed parts of the code (mostly fixes) in the initial version of `gawk`.
- In 1988, David Trueman took over primary maintenance of `gawk`, making it compatible with "new" `awk`, and greatly improving its performance.
- Pat Rankin provided the VMS port and its documentation.
- Conrad Kwok, Scott Garfinkle, and Kent Williams did the initial ports to MS-DOS with various versions of MSC.
- Hal Peterson provided help in porting `gawk` to Cray systems.
- Kai Uwe Rommel provided the initial port to OS/2 and its documentation.
- Michal Jaegermann provided the port to Atari systems and its documentation. He continues to provide portability checking with DEC Alpha systems, and has done a lot of work to make sure `gawk` works on non-32-bit systems.
- Fred Fish provided the port to Amiga systems and its documentation.
- Scott Deifik currently maintains the MS-DOS port.
- Juan Grigera maintains the port to Windows32 systems.
- Dr. Darrel Hankerson acts as coordinator for the various ports to different PC platforms and creates binary distributions for various PC operating systems. He is also instrumental in keeping the documentation up to date for the various PC platforms.
- Christos Zoulas provided the `extension` built-in function for dynamically adding new modules.
- Jürgen Kahrs contributed the initial version of the TCP/IP networking code and documentation, and motivated the inclusion of the '`|&`' operator.
- Stephen Davies provided the port to Tandem systems and its documentation.
- Martin Brown provided the port to BeOS and its documentation.

- Arno Peters did the initial work to convert `gawk` to use GNU Automake and `gettext`.
- Alan J. Broder provided the initial version of the `asort` function as well as the code for the new optional third argument to the `match` function.
- Andreas Buening updated the `gawk` port for OS/2.

  Isamu Hasegawa, of IBM in Japan, contributed support for multibyte characters.

  Michael Benzinger contributed the initial code for `switch` statements.

  Patrick T.J. McPhee contributed the code for dynamic loading in Windows32 environments.
- Arnold Robbins has been working on `gawk` since 1988, at first helping David Trueman, and as the primary maintainer since around 1994.

Appendix B Installing gawk

This appendix provides instructions for installing gawk on the various platforms that are supported by the developers. The primary developer supports GNU/Linux (and Unix), whereas the other ports are contributed. See Section B.5 [Reporting Problems and Bugs], page 276, for the electronic mail addresses of the people who did the respective ports.

B.1 The gawk Distribution

This section describes how to get the gawk distribution, how to extract it, and then what is in the various files and subdirectories.

B.1.1 Getting the gawk Distribution

There are three ways to get GNU software:

- Copy it from someone else who already has it.
- Order gawk directly from the Free Software Foundation. Software distributions are available for Gnu/Linux, Unix, and MS-Windows, in several CD packages. Their address is:

  Free Software Foundation
  59 Temple Place, Suite 330
  Boston, MA 02111-1307 USA
  Phone: +1-617-542-5942
  Fax (including Japan): +1-617-542-2652
  Email: gnu@gnu.org
  URL: http://www.gnu.org

  Ordering from the FSF directly contributes to the support of the foundation and to the production of more free software.
- Retrieve gawk by using anonymous ftp to the Internet host ftp.gnu.org, in the directory '/gnu/gawk'.

The GNU software archive is mirrored around the world. The up-to-date list of mirror sites is available from the main FSF web site (http://www.gnu.org/order/ftp.html). Try to use one of the mirrors; they will be less busy, and you can usually find one closer to your site.

B.1.2 Extracting the Distribution

gawk is distributed as a tar file compressed with the GNU Zip program, gzip.

Once you have the distribution (for example, 'gawk-3.1.4.tar.gz'), use gzip to expand the file and then use tar to extract it. You can use the following pipeline to produce the gawk distribution:

```
# Under System V, add 'o' to the tar options
gzip -d -c gawk-3.1.4.tar.gz | tar -xvpf -
```

This creates a directory named 'gawk-3.1.4' in the current directory.

The distribution file name is of the form 'gawk-*V.R.P*.tar.gz'. The *V* represents the major version of gawk, the *R* represents the current release of version *V*, and the *P* represents

a *patch level*, meaning that minor bugs have been fixed in the release. The current patch level is 4, but when retrieving distributions, you should get the version with the highest version, release, and patch level. (Note, however, that patch levels greater than or equal to 80 denote "beta" or nonproduction software; you might not want to retrieve such a version unless you don't mind experimenting.) If you are not on a Unix system, you need to make other arrangements for getting and extracting the `gawk` distribution. You should consult a local expert.

B.1.3 Contents of the `gawk` Distribution

The `gawk` distribution has a number of C source files, documentation files, subdirectories, and files related to the configuration process (see Section B.2 [Compiling and Installing `gawk` on Unix], page 264), as well as several subdirectories related to different non-Unix operating systems:

Various '`.c`', '`.y`', and '`.h`' files
: The actual `gawk` source code.

'`README`'
'`README_d/README.*`'
: Descriptive files: '`README`' for `gawk` under Unix and the rest for the various hardware and software combinations.

'`INSTALL`' A file providing an overview of the configuration and installation process.

'`ChangeLog`'
: A detailed list of source code changes as bugs are fixed or improvements made.

'`NEWS`' A list of changes to `gawk` since the last release or patch.

'`COPYING`' The GNU General Public License.

'`FUTURES`' A brief list of features and changes being contemplated for future releases, with some indication of the time frame for the feature, based on its difficulty.

'`LIMITATIONS`'
: A list of those factors that limit `gawk`'s performance. Most of these depend on the hardware or operating system software and are not limits in `gawk` itself.

'`POSIX.STD`'
: A description of one area in which the POSIX standard for `awk` is incorrect as well as how `gawk` handles the problem.

'`doc/awkforai.txt`'
: A short article describing why `gawk` is a good language for AI (Artificial Intelligence) programming.

'`doc/README.card`'
'`doc/ad.block`'
'`doc/awkcard.in`'
'`doc/cardfonts`'
'`doc/colors`'
'`doc/macros`'
'`doc/no.colors`'
'`doc/setter.outline`'
: The `troff` source for a five-color `awk` reference card. A modern version of `troff` such as GNU `troff` (`groff`) is needed to produce the color version. See the file '`README.card`' for instructions if you have an older `troff`.

'`doc/gawk.1`'
: The `troff` source for a manual page describing `gawk`. This is distributed for the convenience of Unix users.

'`doc/gawk.texi`'
: The Texinfo source file for this book. It should be processed with TEX to produce a printed document, and with `makeinfo` to produce an Info or HTML file.

'`doc/gawk.info`'
: The generated Info file for this book.

'`doc/gawkinet.texi`'
: The Texinfo source file for *TCP/IP Internetworking with* `gawk`. It should be processed with TEX to produce a printed document and with `makeinfo` to produce an Info or HTML file.

'`doc/gawkinet.info`'
: The generated Info file for *TCP/IP Internetworking with* `gawk`.

'`doc/igawk.1`'
: The `troff` source for a manual page describing the `igawk` program presented in Section 13.3.9 [An Easy Way to Use Library Functions], page 244.

'`doc/Makefile.in`'
: The input file used during the configuration process to generate the actual '`Makefile`' for creating the documentation.

'`Makefile.am`'
'`*/Makefile.am`'
: Files used by the GNU `automake` software for generating the '`Makefile.in`' files used by `autoconf` and `configure`.

'`Makefile.in`'
'`acconfig.h`'
'`acinclude.m4`'
'`aclocal.m4`'
'`configh.in`'
'`configure.in`'
'`configure`'
'`custom.h`'
'`missing_d/*`'
'`m4/*`' These files and subdirectories are used when configuring `gawk` for various Unix systems. They are explained in Section B.2 [Compiling and Installing `gawk` on Unix], page 264.

'`intl/*`'
'`po/*`' The '`intl`' directory provides the GNU `gettext` library, which implements `gawk`'s internationalization features, while the '`po`' library contains message translations.

'`awklib/extract.awk`'
'`awklib/Makefile.am`'
'`awklib/Makefile.in`'
'`awklib/eg/*`'
The '`awklib`' directory contains a copy of '`extract.awk`' (see Section 13.3.7 [Extracting Programs from Texinfo Source Files], page 240), which can be used to extract the sample programs from the Texinfo source file for this book. It also contains a '`Makefile.in`' file, which `configure` uses to generate a '`Makefile`'. '`Makefile.am`' is used by GNU Automake to create '`Makefile.in`'. The library functions from Chapter 12 [A Library of `awk` Functions], page 181, and the `igawk` program from Section 13.3.9 [An Easy Way to Use Library Functions], page 244, are included as ready-to-use files in the `gawk` distribution. They are installed as part of the installation process. The rest of the programs in this book are available in appropriate subdirectories of '`awklib/eg`'.

'`unsupported/atari/*`'
Files needed for building `gawk` on an Atari ST (see Section B.4.1 [Installing `gawk` on the Atari ST], page 274, for details).

'`unsupported/tandem/*`'
Files needed for building `gawk` on a Tandem (see Section B.4.2 [Installing `gawk` on a Tandem], page 275, for details).

'`posix/*`' Files needed for building `gawk` on POSIX-compliant systems.

'`pc/*`' Files needed for building `gawk` under MS-DOS, MS Windows and OS/2 (see Section B.3.3 [Installation on PC Operating Systems], page 267, for details).

'`vms/*`' Files needed for building `gawk` under VMS (see Section B.3.4 [How to Compile and Install `gawk` on VMS], page 271, for details).

'`test/*`' A test suite for `gawk`. You can use '`make check`' from the top-level `gawk` directory to run your version of `gawk` against the test suite. If `gawk` successfully passes '`make check`', then you can be confident of a successful port.

B.2 Compiling and Installing gawk on Unix

Usually, you can compile and install `gawk` by typing only two commands. However, if you use an unusual system, you may need to configure `gawk` for your system yourself.

B.2.1 Compiling gawk for Unix

After you have extracted the `gawk` distribution, `cd` to '`gawk-3.1.4`'. Like most GNU software, `gawk` is configured automatically for your Unix system by running the `configure` program. This program is a Bourne shell script that is generated automatically using GNU `autoconf`. (The `autoconf` software is described fully in *Autoconf—Generating Automatic Configuration Scripts*, which is available from the Free Software Foundation.)

To configure `gawk`, simply run `configure`:

```
sh ./configure
```

This produces a '`Makefile`' and '`config.h`' tailored to your system. The '`config.h`' file describes various facts about your system. You might want to edit the '`Makefile`' to change the `CFLAGS` variable, which controls the command-line options that are passed to the C compiler (such as optimization levels or compiling for debugging).

Alternatively, you can add your own values for most `make` variables on the command line, such as `CC` and `CFLAGS`, when running `configure`:

```
CC=cc CFLAGS=-g sh ./configure
```

See the file '`INSTALL`' in the `gawk` distribution for all the details.

After you have run `configure` and possibly edited the '`Makefile`', type:

```
make
```

Shortly thereafter, you should have an executable version of `gawk`. That's all there is to it! To verify that `gawk` is working properly, run '`make check`'. All of the tests should succeed. If these steps do not work, or if any of the tests fail, check the files in the '`README_d`' directory to see if you've found a known problem. If the failure is not described there, please send in a bug report (see Section B.5 [Reporting Problems and Bugs], page 276.)

B.2.2 Additional Configuration Options

There are several additional options you may use on the `configure` command line when compiling `gawk` from scratch, including:

`--enable-portals`
: Treat pathnames that begin with '`/p`' as BSD portal files when doing two-way I/O with the '`|&`' operator (see Section 10.4 [Using `gawk` with BSD Portals], page 169).

`--enable-switch`
: Enable the recognition and execution of C-style `switch` statements in `awk` programs (see Section 6.4.5 [The `switch` Statement], page 102.)

`--with-included-gettext`
: Use the version of the `gettext` library that comes with `gawk`. This option should be used on systems that do *not* use version 2 (or later) of the GNU C library. All known modern GNU/Linux systems use Glibc 2. Use this option on any other system.

`--disable-lint`
: This option disables all lint checking within `gawk`. The '`--lint`' and '`--lint-old`' options (see Section 11.2 [Command-Line Options], page 173) are accepted, but silently do nothing. Similarly, setting the `LINT` variable (see Section 6.5.1 [Built-in Variables That Control `awk`], page 107) has no effect on the running `awk` program.

  When used with GCC's automatic dead-code-elimination, this option cuts almost 200K bytes off the size of the `gawk` executable on GNU/Linux x86 systems. Results on other systems and with other compilers are likely to vary. Using this option may bring you some slight performance improvement.

  Using this option will cause some of the tests in the test suite to fail. This option may be removed at a later date.

`--disable-nls`
: Disable all message-translation facilities. This is usually not desirable, but it may bring you some slight performance improvement. You should also use this option if '`--with-included-gettext`' doesn't work on your system.

B.2.3 The Configuration Process

This section is of interest only if you know something about using the C language and the Unix operating system.

The source code for `gawk` generally attempts to adhere to formal standards wherever possible. This means that `gawk` uses library routines that are specified by the ISO C standard and by the POSIX operating system interface standard. When using an ISO C compiler, function prototypes are used to help improve the compile-time checking.

Many Unix systems do not support all of either the ISO or the POSIX standards. The '`missing_d`' subdirectory in the `gawk` distribution contains replacement versions of those functions that are most likely to be missing.

The '`config.h`' file that `configure` creates contains definitions that describe features of the particular operating system where you are attempting to compile `gawk`. The three things described by this file are: what header files are available, so that they can be correctly included, what (supposedly) standard functions are actually available in your C libraries, and various miscellaneous facts about your variant of Unix. For example, there may not be an `st_blksize` element in the `stat` structure. In this case, '`HAVE_ST_BLKSIZE`' is undefined.

It is possible for your C compiler to lie to `configure`. It may do so by not exiting with an error when a library function is not available. To get around this, edit the file '`custom.h`'. Use an '`#ifdef`' that is appropriate for your system, and either `#define` any constants that `configure` should have defined but didn't, or `#undef` any constants that `configure` defined and should not have. '`custom.h`' is automatically included by '`config.h`'.

It is also possible that the `configure` program generated by `autoconf` will not work on your system in some other fashion. If you do have a problem, the file '`configure.in`' is the input for `autoconf`. You may be able to change this file and generate a new version of `configure` that works on your system (see Section B.5 [Reporting Problems and Bugs], page 276, for information on how to report problems in configuring `gawk`). The same mechanism may be used to send in updates to '`configure.in`' and/or '`custom.h`'.

B.3 Installation on Other Operating Systems

This section describes how to install `gawk` on various non-Unix systems.

B.3.1 Installing `gawk` on an Amiga

You can install `gawk` on an Amiga system using a Unix emulation environment, available via anonymous `ftp` from `ftp.ninemoons.com` in the directory '`pub/ade/current`'. This includes a shell based on `pdksh`. The primary component of this environment is a Unix emulation library, '`ixemul.lib`'.

A more complete distribution for the Amiga is available on the Geek Gadgets CD-ROM, available from:

CRONUS
1840 E. Warner Road #105-265
Tempe, AZ 85284 USA
US Toll Free: (800) 804-0833
Phone: +1-602-491-0442
FAX: +1-602-491-0048
Email: `info@ninemoons.com`
WWW: `http://www.ninemoons.com`
Anonymous `ftp` site: `ftp.ninemoons.com`

Once you have the distribution, you can configure `gawk` simply by running `configure`:

```
configure -v m68k-amigaos
```

Then run `make` and you should be all set! If these steps do not work, please send in a bug report (see Section B.5 [Reporting Problems and Bugs], page 276).

B.3.2 Installing `gawk` on BeOS

Since BeOS DR9, all the tools that you should need to build `gawk` are included with BeOS. The process is basically identical to the Unix process of running `configure` and then `make`. Full instructions are given below.

You can compile `gawk` under BeOS by extracting the standard sources and running `configure`. You *must* specify the location prefix for the installation directory. For BeOS DR9 and beyond, the best directory to use is '`/boot/home/config`', so the `configure` command is:

```
configure --prefix=/boot/home/config
```

This installs the compiled application into '`/boot/home/config/bin`', which is already specified in the standard `PATH`.

Once the configuration process is completed, you can run `make`, and then '`make install`':

```
$ make
...
$ make install
```

BeOS uses `bash` as its shell; thus, you use `gawk` the same way you would under Unix. If these steps do not work, please send in a bug report (see Section B.5 [Reporting Problems and Bugs], page 276).

B.3.3 Installation on PC Operating Systems

This section covers installation and usage of `gawk` on x86 machines running DOS, any version of Windows, or OS/2. In this section, the term "Windows32" refers to any of Windows-95/98/ME/NT/2000.

The limitations of DOS (and DOS shells under Windows or OS/2) has meant that various "DOS extenders" are often used with programs such as `gawk`. The varying capabilities of Microsoft Windows 3.1 and Windows32 can add to the confusion. For an overview of the considerations, please refer to '`README_d/README.pc`' in the distribution.

B.3.3.1 Installing a Prepared Distribution for PC Systems

If you have received a binary distribution prepared by the DOS maintainers, then `gawk` and the necessary support files appear under the '`gnu`' directory, with executables in '`gnu/bin`', libraries in '`gnu/lib/awk`', and manual pages under '`gnu/man`'. This is designed for easy installation to a '`/gnu`' directory on your drive—however, the files can be installed anywhere provided `AWKPATH` is set properly. Regardless of the installation directory, the first line of '`igawk.cmd`' and '`igawk.bat`' (in '`gnu/bin`') may need to be edited.

The binary distribution contains a separate file describing the contents. In particular, it may include more than one version of the `gawk` executable.

OS/2 (32 bit, EMX) binary distributions are prepared for the '`/usr`' directory of your preferred drive. Set `UNIXROOT` to your installation drive (e.g., '`e:`') if you want to install `gawk` onto another drive than the hardcoded default '`c:`'. Executables appear in '`/usr/bin`', libraries under '`/usr/share/awk`', manual pages under '`/usr/man`', Texinfo documentation under '`/usr/info`' and NLS files under '`/usr/share/locale`'. If you already have a file '`/usr/info/dir`' from another package *do not overwrite it!* Instead enter the following commands at your prompt (replace '`x:`' by your installation drive):

```
install-info --info-dir=x:/usr/info x:/usr/info/gawk.info
install-info --info-dir=x:/usr/info x:/usr/info/gawkinet.info
```

However, the files can be installed anywhere provided `AWKPATH` is set properly.

The binary distribution may contain a separate file containing additional or more detailed installation instructions.

B.3.3.2 Compiling `gawk` for PC Operating Systems

`gawk` can be compiled for MS-DOS, Windows32, and OS/2 using the GNU development tools from DJ Delorie (DJGPP; MS-DOS only) or Eberhard Mattes (EMX; MS-DOS, Windows32 and OS/2). Microsoft Visual C/C++ can be used to build a Windows32 version, and Microsoft C/C++ can be used to build 16-bit versions for MS-DOS and OS/2. (As of `gawk` 3.1.2, the MSC version doesn't work. However, the maintainer is working on fixing it.) The file '`README_d/README.pc`' in the `gawk` distribution contains additional notes, and '`pc/Makefile`' contains important information on compilation options.

To build `gawk` for MS-DOS, Windows32, and OS/2 (16 bit only; for 32 bit (EMX) you can use the `configure` script and skip the following paragraphs; for details see below), copy the files in the '`pc`' directory (*except* for '`ChangeLog`') to the directory with the rest of the `gawk` sources. The '`Makefile`' contains a configuration section with comments and may need to be edited in order to work with your `make` utility.

The 'Makefile' contains a number of targets for building various MS-DOS, Windows32, and OS/2 versions. A list of targets is printed if the make command is given without a target. As an example, to build gawk using the DJGPP tools, enter 'make djgpp'. (The DJGPP tools may be found at ftp://ftp.delorie.com/pub/djgpp/current/v2gnu/.)

Using make to run the standard tests and to install gawk requires additional Unix-like tools, including sh, sed, and cp. In order to run the tests, the 'test/*.ok' files may need to be converted so that they have the usual DOS-style end-of-line markers. Most of the tests work properly with Stewartson's shell along with the companion utilities or appropriate GNU utilities. However, some editing of 'test/Makefile' is required. It is recommended that you copy the file 'pc/Makefile.tst' over the file 'test/Makefile' as a replacement. Details can be found in 'README_d/README.pc' and in the file 'pc/Makefile.tst'.

The 32 bit EMX version of gawk works "out of the box" under OS/2. In principle, it is possible to compile gawk the following way:

```
$ ./configure
$ make
```

This is not recommended, though. To get an OMF executable you should use the following commands at your sh prompt:

```
$ CPPFLAGS="-D__ST_MT_ERRNO__"
$ export CPPFLAGS
$ CFLAGS="-O2 -Zomf -Zmt"
$ export CFLAGS
$ LDFLAGS="-s -Zcrtdll -Zlinker /exepack:2 -Zlinker /pm:vio -Zstack 0x8000"
$ export LDFLAGS
$ RANLIB="echo"
$ export RANLIB
$ ./configure --prefix=c:/usr --without-included-gettext
$ make AR=emxomfar
```

These are just suggestions. You may use any other set of (self-consistent) environment variables and compiler flags.

To get an FHS-compliant file hierarchy it is recommended to use the additional configure options '--infodir=c:/usr/share/info', '--mandir=c:/usr/share/man' and '--libexecdir=c:/usr/lib'.

The internal gettext library tends to be problematic. It is therefore recommended to use either an external one ('--without-included-gettext') or to disable NLS entirely ('--disable-nls').

If you use GCC 2.95 or newer it is recommended to use also:

```
$ LIBS="-lgcc"
$ export LIBS
```

You can also get an a.out executable if you prefer:

```
$ CPPFLAGS="-D__ST_MT_ERRNO__"
$ export CPPFLAGS
$ CFLAGS="-O2 -Zmt"
$ export CFLAGS
$ LDFLAGS="-s -Zstack 0x8000"
```

```
$ LIBS="-lgcc"
$ unset RANLIB
$ ./configure --prefix=c:/usr --without-included-gettext
$ make
```

NOTE: Even if the compiled `gawk.exe` (`a.out`) executable contains a DOS header, it does *not* work under DOS. To compile an executable that runs under DOS, `"-DPIPES_SIMULATED"` must be added to `CPPFLAGS`. But then some nonstandard extensions of `gawk` (e.g., '`|&`') do not work!

After compilation the internal tests can be performed. Enter '`make check CMP="diff -a"`' at your command prompt. All tests but the `pid` test are expected to work properly. The `pid` test fails because child processes are not started by `fork()`.

'`make install`' works as expected.

NOTE: Most OS/2 ports of GNU `make` are not able to handle the Makefiles of this package. If you encounter any problems with `make` try GNU Make 3.79.1 or later versions. You should find the latest version on `http://www.unixos2.org/sw/pub/binary/make/` or on `ftp://hobbes.nmsu.edu/pub/os2/`.

B.3.3.3 Compiling gawk For Dynamic Libraries

To compile `gawk` with dynamic extension support, uncomment the definitions of `DYN_FLAGS`, `DYN_EXP`, `DYN_OBJ`, and `DYN_MAKEXP` in the configuration section of the '`Makefile`'. There are two definitions for `DYN_MAKEXP`: pick the one that matches your target.

To build some of the example extension libraries, `cd` to the extension directory and copy '`Makefile.pc`' to '`Makefile`'. You can then build using the same two targets. To run the example `awk` scripts, you'll need to either change the call to the `extension` function to match the name of the library (for instance, change `"./ordchr.so"` to `"ordchr.dll"` or simply `"ordchr"`), or rename the library to match the call (for instance, rename '`ordchr.dll`' to '`ordchr.so`').

If you build `gawk.exe` with one compiler but want to build an extension library with the other, you need to copy the import library. Visual C uses a library called '`gawk.lib`', while MinGW uses a library called '`libgawk.a`'. These files are equivalent and will interoperate if you give them the correct name. The resulting shared libraries are also interoperable.

To create your own extension library, you can use the examples as models, but you're essentially on your own. Post to `comp.lang.awk` or send electronic mail to `ptjm@interlog.com` if you have problems getting started. If you need to access functions or variables which are not exported by `gawk.exe`, add them to '`gawkw32.def`' and rebuild. You should also add `ATTRIBUTE_EXPORTED` to the declaration in '`awk.h`' of any variables you add to '`gawkw32.def`'.

Note that extension libraries have the name of the `awk` executable embedded in them at link time, so they will work only with `gawk.exe`. In particular, they won't work if you rename `gawk.exe` to `awk.exe` or if you try to use `pgawk.exe`. You can perform profiling by temporarily renaming `pgawk.exe` to `gawk.exe`. You can resolve this problem by changing the program name in the definition of `DYN_MAKEXP` for your compiler.

On Windows32, libraries are sought first in the current directory, then in the directory containing `gawk.exe`, and finally through the `PATH` environment variable.

B.3.3.4 Using gawk on PC Operating Systems

With the exception of the Cygwin environment, the '|&' operator and TCP/IP networking (see Section 10.3 [Using gawk for Network Programming], page 168) are not supported for MS-DOS or MS-Windows. EMX (OS/2 only) does support at least the '|&' operator.

The OS/2 and MS-DOS versions of gawk search for program files as described in Section 11.4 [The AWKPATH Environment Variable], page 178. However, semicolons (rather than colons) separate elements in the AWKPATH variable. If AWKPATH is not set or is empty, then the default search path for OS/2 (16 bit) and MS-DOS versions is ".;c:/lib/awk;c:/gnu/lib/awk".

The search path for OS/2 (32 bit, EMX) is determined by the prefix directory (most likely '/usr' or 'c:/usr') that has been specified as an option of the configure script like it is the case for the Unix versions. If 'c:/usr' is the prefix directory then the default search path contains '.' and 'c:/usr/share/awk'. Additionally, to support binary distributions of gawk for OS/2 systems whose drive 'c:' might not support long file names or might not exist at all, there is a special environment variable. If UNIXROOT specifies a drive then this specific drive is also searched for program files. E.g., if UNIXROOT is set to 'e:' the complete default search path is ".;c:/usr/share/awk;e:/usr/share/awk".

An sh-like shell (as opposed to command.com under MS-DOS or cmd.exe under OS/2) may be useful for awk programming. Ian Stewartson has written an excellent shell for MS-DOS and OS/2, Daisuke Aoyama has ported GNU bash to MS-DOS using the DJGPP tools, and several shells are available for OS/2, including ksh. The file 'README_d/README.pc' in the gawk distribution contains information on these shells. Users of Stewartson's shell on DOS should examine its documentation for handling command lines; in particular, the setting for gawk in the shell configuration may need to be changed and the ignoretype option may also be of interest.

Under OS/2 and DOS, gawk (and many other text programs) silently translate end-of-line "\r\n" to "\n" on input and "\n" to "\r\n" on output. A special BINMODE variable allows control over these translations and is interpreted as follows:

- If BINMODE is '"r"', or (BINMODE & 1) is nonzero, then binary mode is set on read (i.e., no translations on reads).
- If BINMODE is "w", or (BINMODE & 2) is nonzero, then binary mode is set on write (i.e., no translations on writes).
- If BINMODE is "rw" or "wr", binary mode is set for both read and write (same as (BINMODE & 3)).
- BINMODE=*non-null-string* is the same as 'BINMODE=3' (i.e., no translations on reads or writes). However, gawk issues a warning message if the string is not one of "rw" or "wr".

The modes for standard input and standard output are set one time only (after the command line is read, but before processing any of the awk program). Setting BINMODE for standard input or standard output is accomplished by using an appropriate '-v BINMODE=*N*' option on the command line. BINMODE is set at the time a file or pipe is opened and cannot be changed mid-stream.

The name BINMODE was chosen to match mawk (see Section B.6 [Other Freely Available awk Implementations], page 277). Both mawk and gawk handle BINMODE similarly; however,

`mawk` adds a '`-W BINMODE=`*N*' option and an environment variable that can set `BINMODE`, `RS`, and `ORS`. The files '`binmode[1-3].awk`' (under '`gnu/lib/awk`' in some of the prepared distributions) have been chosen to match `mawk`'s '`-W BINMODE=`*N*' option. These can be changed or discarded; in particular, the setting of `RS` giving the fewest "surprises" is open to debate. `mawk` uses '`RS = "\r\n"`' if binary mode is set on read, which is appropriate for files with the DOS-style end-of-line.

To illustrate, the following examples set binary mode on writes for standard output and other files, and set `ORS` as the "usual" DOS-style end-of-line:

```
gawk -v BINMODE=2 -v ORS="\r\n" ...
```

or:

```
gawk -v BINMODE=w -f binmode2.awk ...
```

These give the same result as the '`-W BINMODE=2`' option in `mawk`. The following changes the record separator to `"\r\n"` and sets binary mode on reads, but does not affect the mode on standard input:

```
gawk -v RS="\r\n" --source "BEGIN { BINMODE = 1 }" ...
```

or:

```
gawk -f binmode1.awk ...
```

With proper quoting, in the first example the setting of `RS` can be moved into the `BEGIN` rule.

B.3.3.5 Using `gawk` In The Cygwin Environment

`gawk` can be used "out of the box" under Windows if you are using the Cygwin environment.[1] This environment provides an excellent simulation of Unix, using the GNU tools, such as `bash`, the GNU Compiler Collection (GCC), GNU Make, and other GNU tools. Compilation and installation for Cygwin is the same as for a Unix system:

```
tar -xvpzf gawk-3.1.4.tar.gz
cd gawk-3.1.4
./configure
make
```

When compared to GNU/Linux on the same system, the '`configure`' step on Cygwin takes considerably longer. However, it does finish, and then the '`make`' proceeds as usual.

> **NOTE:** The '`|&`' operator and TCP/IP networking (see Section 10.3 [Using `gawk` for Network Programming], page 168) are fully supported in the Cygwin environment. This is not true for any other environment for MS-DOS or MS-Windows.

B.3.4 How to Compile and Install `gawk` on VMS

This subsection describes how to compile and install `gawk` under VMS.

B.3.4.1 Compiling `gawk` on VMS

To compile `gawk` under VMS, there is a `DCL` command procedure that issues all the necessary `CC` and `LINK` commands. There is also a '`Makefile`' for use with the `MMS` utility. From the source directory, use either:

[1] `http://www.cygwin.com`

```
$ @[.VMS]VMSBUILD.COM
```

or:

```
$ MMS/DESCRIPTION=[.VMS]DESCRIP.MMS GAWK
```

Depending upon which C compiler you are using, follow one of the sets of instructions in this table:

VAX C V3.x
: Use either 'vmsbuild.com' or 'descrip.mms' as is. These use CC/OPTIMIZE=NOLINE, which is essential for Version 3.0.

VAX C V2.x
: You must have Version 2.3 or 2.4; older ones won't work. Edit either 'vmsbuild.com' or 'descrip.mms' according to the comments in them. For 'vmsbuild.com', this just entails removing two '!' delimiters. Also edit 'config.h' (which is a copy of file '[.config]vms-conf.h') and comment out or delete the two lines '#define __STDC__ 0' and '#define VAXC_BUILTINS' near the end.

GNU C
: Edit 'vmsbuild.com' or 'descrip.mms'; the changes are different from those for VAX C V2.x but equally straightforward. No changes to 'config.h' are needed.

DEC C
: Edit 'vmsbuild.com' or 'descrip.mms' according to their comments. No changes to 'config.h' are needed.

gawk has been tested under VAX/VMS 5.5-1 using VAX C V3.2, and GNU C 1.40 and 2.3. It should work without modifications for VMS V4.6 and up.

B.3.4.2 Installing gawk on VMS

To install gawk, all you need is a "foreign" command, which is a DCL symbol whose value begins with a dollar sign. For example:

```
$ GAWK :== $disk1:[gnubin]GAWK
```

Substitute the actual location of gawk.exe for '$disk1:[gnubin]'. The symbol should be placed in the 'login.com' of any user who wants to run gawk, so that it is defined every time the user logs on. Alternatively, the symbol may be placed in the system-wide 'sylogin.com' procedure, which allows all users to run gawk.

Optionally, the help entry can be loaded into a VMS help library:

```
$ LIBRARY/HELP SYS$HELP:HELPLIB [.VMS]GAWK.HLP
```

(You may want to substitute a site-specific help library rather than the standard VMS library 'HELPLIB'.) After loading the help text, the command:

```
$ HELP GAWK
```

provides information about both the gawk implementation and the awk programming language.

The logical name 'AWK_LIBRARY' can designate a default location for awk program files. For the '-f' option, if the specified file name has no device or directory path information in it, gawk looks in the current directory first, then in the directory specified by the translation of 'AWK_LIBRARY' if the file is not found. If, after searching in both directories, the file still

is not found, gawk appends the suffix '.awk' to the filename and retries the file search. If 'AWK_LIBRARY' is not defined, that portion of the file search fails benignly.

B.3.4.3 Running gawk on VMS

Command-line parsing and quoting conventions are significantly different on VMS, so examples in this book or from other sources often need minor changes. They *are* minor though, and all awk programs should run correctly.

Here are a couple of trivial tests:

```
$ gawk -- "BEGIN {print ""Hello, World!""}"
$ gawk -"W" version
! could also be -"W version" or "-W version"
```

Note that uppercase and mixed-case text must be quoted.

The VMS port of gawk includes a DCL-style interface in addition to the original shell-style interface (see the help entry for details). One side effect of dual command-line parsing is that if there is only a single parameter (as in the quoted string program above), the command becomes ambiguous. To work around this, the normally optional '--' flag is required to force Unix style rather than DCL parsing. If any other dash-type options (or multiple parameters such as data files to process) are present, there is no ambiguity and '--' can be omitted.

The default search path, when looking for awk program files specified by the '-f' option, is "SYS$DISK:[],AWK_LIBRARY:". The logical name 'AWKPATH' can be used to override this default. The format of 'AWKPATH' is a comma-separated list of directory specifications. When defining it, the value should be quoted so that it retains a single translation and not a multitranslation RMS searchlist.

B.3.4.4 Building and Using gawk on VMS POSIX

Ignore the instructions above, although 'vms/gawk.hlp' should still be made available in a help library. The source tree should be unpacked into a container file subsystem rather than into the ordinary VMS filesystem. Make sure that the two scripts, 'configure' and 'vms/posix-cc.sh', are executable; use 'chmod +x' on them if necessary. Then execute the following two commands:

```
psx> CC=vms/posix-cc.sh configure
psx> make CC=c89 gawk
```

The first command constructs files 'config.h' and 'Makefile' out of templates, using a script to make the C compiler fit configure's expectations. The second command compiles and links gawk using the C compiler directly; ignore any warnings from make about being unable to redefine CC. configure takes a very long time to execute, but at least it provides incremental feedback as it runs.

This has been tested with VAX/VMS V6.2, VMS POSIX V2.0, and DEC C V5.2.

Once built, gawk works like any other shell utility. Unlike the normal VMS port of gawk, no special command-line manipulation is needed in the VMS POSIX environment.

B.4 Unsupported Operating System Ports

This sections describes systems for which the gawk port is no longer supported.

B.4.1 Installing gawk on the Atari ST

The Atari port is no longer supported. It is included for those who might want to use it but it is no longer being actively maintained.

There are no substantial differences when installing gawk on various Atari models. Compiled gawk executables do not require a large amount of memory with most awk programs, and should run on all Motorola processor-based models (called further ST, even if that is not exactly right).

In order to use gawk, you need to have a shell, either text or graphics, that does not map all the characters of a command line to uppercase. Maintaining case distinction in option flags is very important (see Section 11.2 [Command-Line Options], page 173). These days this is the default and it may only be a problem for some very old machines. If your system does not preserve the case of option flags, you need to upgrade your tools. Support for I/O redirection is necessary to make it easy to import awk programs from other environments. Pipes are nice to have but not vital.

B.4.1.1 Compiling gawk on the Atari ST

A proper compilation of gawk sources when `sizeof(int)` differs from `sizeof(void *)` requires an ISO C compiler. An initial port was done with gcc. You may actually prefer executables where `int`s are four bytes wide but the other variant works as well.

You may need quite a bit of memory when trying to recompile the gawk sources, as some source files ('`regex.c`' in particular) are quite big. If you run out of memory compiling such a file, try reducing the optimization level for this particular file, which may help.

With a reasonable shell (bash will do), you have a pretty good chance that the `configure` utility will succeed, and in particular if you run GNU/Linux, MiNT or a similar operating system. Otherwise sample versions of '`config.h`' and '`Makefile.st`' are given in the '`atari`' subdirectory and can be edited and copied to the corresponding files in the main source directory. Even if `configure` produces something, it might be advisable to compare its results with the sample versions and possibly make adjustments.

Some gawk source code fragments depend on a preprocessor define '`atarist`'. This basically assumes the TOS environment with gcc. Modify these sections as appropriate if they are not right for your environment. Also see the remarks about `AWKPATH` and `envsep` in Section B.4.1.2 [Running gawk on the Atari ST], page 274.

As shipped, the sample '`config.h`' claims that the `system` function is missing from the libraries, which is not true, and an alternative implementation of this function is provided in '`unsupported/atari/system.c`'. Depending upon your particular combination of shell and operating system, you might want to change the file to indicate that `system` is available.

B.4.1.2 Running gawk on the Atari ST

An executable version of gawk should be placed, as usual, anywhere in your `PATH` where your shell can find it.

While executing, the Atari version of gawk creates a number of temporary files. When using gcc libraries for TOS, gawk looks for either of the environment variables, `TEMP` or `TMPDIR`, in that order. If either one is found, its value is assumed to be a directory for temporary files. This directory must exist, and if you can spare the memory, it is a good

idea to put it on a RAM drive. If neither `TEMP` nor `TMPDIR` are found, then `gawk` uses the current directory for its temporary files.

The ST version of `gawk` searches for its program files, as described in Section 11.4 [The `AWKPATH` Environment Variable], page 178. The default value for the `AWKPATH` variable is taken from `DEFPATH` defined in '`Makefile`'. The sample `gcc`/TOS '`Makefile`' for the ST in the distribution sets `DEFPATH` to `".,c:\lib\awk,c:\gnu\lib\awk"`. The search path can be modified by explicitly setting `AWKPATH` to whatever you want. Note that colons cannot be used on the ST to separate elements in the `AWKPATH` variable, since they have another reserved meaning. Instead, you must use a comma to separate elements in the path. When recompiling, the separating character can be modified by initializing the `envsep` variable in '`unsupported/atari/gawkmisc.atr`' to another value.

Although `awk` allows great flexibility in doing I/O redirections from within a program, this facility should be used with care on the ST running under TOS. In some circumstances, the OS routines for file-handle pool processing lose track of certain events, causing the computer to crash and requiring a reboot. Often a warm reboot is sufficient. Fortunately, this happens infrequently and in rather esoteric situations. In particular, avoid having one part of an `awk` program using `print` statements explicitly redirected to '`/dev/stdout`', while other `print` statements use the default standard output, and a calling shell has redirected standard output to a file.

When `gawk` is compiled with the ST version of `gcc` and its usual libraries, it accepts both '`/`' and '`\`' as path separators. While this is convenient, it should be remembered that this removes one technically valid character ('`/`') from your file name. It may also create problems for external programs called via the `system` function, which may not support this convention. Whenever it is possible that a file created by `gawk` will be used by some other program, use only backslashes. Also remember that in `awk`, backslashes in strings have to be doubled in order to get literal backslashes (see Section 2.2 [Escape Sequences], page 25).

B.4.2 Installing `gawk` on a Tandem

The Tandem port is only minimally supported. The port's contributor no longer has access to a Tandem system.

The Tandem port was done on a Cyclone machine running D20. The port is pretty clean and all facilities seem to work except for the I/O piping facilities (see Section 3.8.5 [Using `getline` from a Pipe], page 54, Section 3.8.6 [Using `getline` into a Variable from a Pipe], page 55, and Section 4.6 [Redirecting Output of `print` and `printf`], page 65), which is just too foreign a concept for Tandem.

To build a Tandem executable from source, download all of the files so that the file names on the Tandem box conform to the restrictions of D20. For example, '`array.c`' becomes '`ARRAYC`', and '`awk.h`' becomes '`AWKH`'. The totally Tandem-specific files are in the '`tandem`' "subvolume" ('`unsupported/tandem`' in the `gawk` distribution) and should be copied to the main source directory before building `gawk`.

The file '`compit`' can then be used to compile and bind an executable. Alas, there is no `configure` or `make`.

Usage is the same as for Unix, except that D20 requires all '`{`' and '`}`' characters to be escaped with '`~`' on the command line (but *not* in script files). Also, the standard Tandem

syntax for '`/in filename,out filename/`' must be used instead of the usual Unix '`<`' and '`>`' for file redirection. (Redirection options on `getline`, `print` etc., are supported.)

The '`-mr val`' option (see Section 11.2 [Command-Line Options], page 173) has been "stolen" to enable Tandem users to process fixed-length records with no "end-of-line" character. That is, '`-mr 74`' tells `gawk` to read the input file as fixed 74-byte records.

B.5 Reporting Problems and Bugs

> *There is nothing more dangerous than a bored archeologist.*
> The Hitchhiker's Guide to the Galaxy

If you have problems with `gawk` or think that you have found a bug, please report it to the developers; we cannot promise to do anything but we might well want to fix it.

Before reporting a bug, make sure you have actually found a real bug. Carefully reread the documentation and see if it really says you can do what you're trying to do. If it's not clear whether you should be able to do something or not, report that too; it's a bug in the documentation!

Before reporting a bug or trying to fix it yourself, try to isolate it to the smallest possible `awk` program and input data file that reproduces the problem. Then send us the program and data file, some idea of what kind of Unix system you're using, the compiler you used to compile `gawk`, and the exact results `gawk` gave you. Also say what you expected to occur; this helps us decide whether the problem is really in the documentation.

Once you have a precise problem, send email to `bug-gawk@gnu.org`.

Please include the version number of `gawk` you are using. You can get this information with the command '`gawk --version`'. Using this address automatically sends a carbon copy of your mail to me. If necessary, I can be reached directly at `arnold@gnu.org`. The bug reporting address is preferred since the email list is archived at the GNU Project. *All email should be in English, since that is my native language.*

Caution: Do *not* try to report bugs in `gawk` by posting to the Usenet/Internet newsgroup `comp.lang.awk`. While the `gawk` developers do occasionally read this newsgroup, there is no guarantee that we will see your posting. The steps described above are the official recognized ways for reporting bugs.

Non-bug suggestions are always welcome as well. If you have questions about things that are unclear in the documentation or are just obscure features, ask me; I will try to help you out, although I may not have the time to fix the problem. You can send me electronic mail at the Internet address noted previously.

If you find bugs in one of the non-Unix ports of `gawk`, please send an electronic mail message to the person who maintains that port. They are named in the following list, as well as in the '`README`' file in the `gawk` distribution. Information in the '`README`' file should be considered authoritative if it conflicts with this book.

The people maintaining the non-Unix ports of `gawk` are as follows:

Amiga	Fred Fish, `fnf@ninemoons.com`.
BeOS	Martin Brown, `mc@whoever.com`.

MS-DOS	Scott Deifik, scottd@amgen.com and Darrel Hankerson, hankedr@mail.auburn.edu.
MS-Windows	Juan Grigera, juan@biophnet.unlp.edu.ar.
OS/2	The Unix for OS/2 team, gawk-maintainer@unixos2.org.
Tandem	Stephen Davies, scldad@sdc.com.au.
VMS	Pat Rankin, rankin@pactechdata.com.

If your bug is also reproducible under Unix, please send a copy of your report to the bug-gawk@gnu.org email list as well.

B.6 Other Freely Available awk Implementations

It's kind of fun to put comments like this in your awk code.

```
// Do C++ comments work? answer: yes! of course
```

Michael Brennan

There are three other freely available awk implementations. This section briefly describes where to get them:

Unix awk Brian Kernighan has made his implementation of awk freely available. You can retrieve this version via the World Wide Web from his home page.[2] It is available in several archive formats:

Shell archive
: http://cm.bell-labs.com/who/bwk/awk.shar

Compressed tar file
: http://cm.bell-labs.com/who/bwk/awk.tar.gz

Zip file
: http://cm.bell-labs.com/who/bwk/awk.zip

This version requires an ISO C (1990 standard) compiler; the C compiler from GCC (the GNU Compiler Collection) works quite nicely.

See Section A.4 [Extensions in the Bell Laboratories awk], page 254, for a list of extensions in this awk that are not in POSIX awk.

mawk Michael Brennan has written an independent implementation of awk, called mawk. It is available under the GPL (see [GNU General Public License], page 309), just as gawk is.

You can get it via anonymous ftp to the host ftp.whidbey.net. Change directory to '/pub/brennan'. Use "binary" or "image" mode, and retrieve 'mawk1.3.3.tar.gz' (or the latest version that is there).

gunzip may be used to decompress this file. Installation is similar to gawk's (see Section B.2 [Compiling and Installing gawk on Unix], page 264).

mawk has the following extensions that are not in POSIX awk:

- The fflush built-in function for flushing buffered output (see Section 8.1.4 [Input/Output Functions], page 140).

[2] http://cm.bell-labs.com/who/bwk

- The '`**`' and '`**=`' operators (see Section 5.5 [Arithmetic Operators], page 78 and also see Section 5.7 [Assignment Expressions], page 81).
- The use of `func` as an abbreviation for `function` (see Section 8.2.1 [Function Definition Syntax], page 149).
- The '`\x`' escape sequence (see Section 2.2 [Escape Sequences], page 25).
- The '`/dev/stdout`', and '`/dev/stderr`' special files (see Section 4.7 [Special File Names in `gawk`], page 67). Use `"-"` instead of `"/dev/stdin"` with `mawk`.
- The ability for `FS` and for the third argument to `split` to be null strings (see Section 3.5.2 [Making Each Character a Separate Field], page 44).
- The ability to delete all of an array at once with '`delete` *`array`*' (see Section 7.6 [The `delete` Statement], page 120).
- The ability for `RS` to be a regexp (see Section 3.1 [How Input Is Split into Records], page 36).
- The `BINMODE` special variable for non-Unix operating systems (see Section B.3.3.4 [Using `gawk` on PC Operating Systems], page 270).

The next version of `mawk` will support `nextfile`.

`awka` Written by Andrew Sumner, `awka` translates `awk` programs into C, compiles them, and links them with a library of functions that provides the core `awk` functionality. It also has a number of extensions.

The `awk` translator is released under the GPL, and the library is under the LGPL.

To get `awka`, go to `http://awka.sourceforge.net`. You can reach Andrew Sumner at `andrew@zbcom.net`.

`pawk` Nelson H.F. Beebe at the University of Utah has modified the Bell Labs `awk` to provide timing and profiling information. It is different from `pgawk` (see Section 10.5 [Profiling Your `awk` Programs], page 169), in that it uses CPU-based profiling, not line-count profiling. You may find it at either `ftp://ftp.math.utah.edu/pub/pawk/pawk-20020210.tar.gz` or `http://www.math.utah.edu/pub/pawk/pawk-20020210.tar.gz`.

Appendix C Implementation Notes

This appendix contains information mainly of interest to implementors and maintainers of `gawk`. Everything in it applies specifically to `gawk` and not to other implementations.

C.1 Downward Compatibility and Debugging

See Section A.5 [Extensions in `gawk` Not in POSIX `awk`], page 255, for a summary of the GNU extensions to the `awk` language and program. All of these features can be turned off by invoking `gawk` with the '`--traditional`' option or with the '`--posix`' option.

If `gawk` is compiled for debugging with '`-DDEBUG`', then there is one more option available on the command line:

`-W parsedebug`
`--parsedebug`
: Prints out the parse stack information as the program is being parsed.

This option is intended only for serious `gawk` developers and not for the casual user. It probably has not even been compiled into your version of `gawk`, since it slows down execution.

C.2 Making Additions to `gawk`

If you find that you want to enhance `gawk` in a significant fashion, you are perfectly free to do so. That is the point of having free software; the source code is available and you are free to change it as you want (see [GNU General Public License], page 309).

This section discusses the ways you might want to change `gawk` as well as any considerations you should bear in mind.

C.2.1 Adding New Features

You are free to add any new features you like to `gawk`. However, if you want your changes to be incorporated into the `gawk` distribution, there are several steps that you need to take in order to make it possible for me to include your changes:

1. Before building the new feature into `gawk` itself, consider writing it as an extension module (see Section C.3 [Adding New Built-in Functions to `gawk`], page 282). If that's not possible, continue with the rest of the steps in this list.
2. Get the latest version. It is much easier for me to integrate changes if they are relative to the most recent distributed version of `gawk`. If your version of `gawk` is very old, I may not be able to integrate them at all. (See Section B.1.1 [Getting the `gawk` Distribution], page 260, for information on getting the latest version of `gawk`.)
3. Follow the *GNU Coding Standards*. This document describes how GNU software should be written. If you haven't read it, please do so, preferably *before* starting to modify `gawk`. (The *GNU Coding Standards* are available from the GNU Project's `ftp` site, at `ftp://ftp.gnu.org/gnu/GNUinfo/standards.text`. An HTML version, suitable for reading with a WWW browser, is available at `http://www.gnu.org/prep/standards_toc.html`. Texinfo, Info, and DVI versions are also available.)

4. Use the `gawk` coding style. The C code for `gawk` follows the instructions in the *GNU Coding Standards*, with minor exceptions. The code is formatted using the traditional "K&R" style, particularly as regards to the placement of braces and the use of tabs. In brief, the coding rules for `gawk` are as follows:
   - Use ANSI/ISO style (prototype) function headers when defining functions.
   - Put the name of the function at the beginning of its own line.
   - Put the return type of the function, even if it is `int`, on the line above the line with the name and arguments of the function.
   - Put spaces around parentheses used in control structures (`if`, `while`, `for`, `do`, `switch`, and `return`).
   - Do not put spaces in front of parentheses used in function calls.
   - Put spaces around all C operators and after commas in function calls.
   - Do not use the comma operator to produce multiple side effects, except in `for` loop initialization and increment parts, and in macro bodies.
   - Use real tabs for indenting, not spaces.
   - Use the "K&R" brace layout style.
   - Use comparisons against `NULL` and `'\0'` in the conditions of `if`, `while`, and `for` statements, as well as in the `case`s of `switch` statements, instead of just the plain pointer or character value.
   - Use the `TRUE`, `FALSE` and `NULL` symbolic constants and the character constant `'\0'` where appropriate, instead of `1` and `0`.
   - Use the `ISALPHA`, `ISDIGIT`, etc. macros, instead of the traditional lowercase versions; these macros are better behaved for non-ASCII character sets.
   - Provide one-line descriptive comments for each function.
   - Do not use '`#elif`'. Many older Unix C compilers cannot handle it.
   - Do not use the `alloca` function for allocating memory off the stack. Its use causes more portability trouble than is worth the minor benefit of not having to free the storage. Instead, use `malloc` and `free`.

   > **NOTE:** If I have to reformat your code to follow the coding style used in `gawk`, I may not bother to integrate your changes at all.

5. Be prepared to sign the appropriate paperwork. In order for the FSF to distribute your changes, you must either place those changes in the public domain and submit a signed statement to that effect, or assign the copyright in your changes to the FSF. Both of these actions are easy to do and *many* people have done so already. If you have questions, please contact me (see Section B.5 [Reporting Problems and Bugs], page 276), or `gnu@gnu.org`.
6. Update the documentation. Along with your new code, please supply new sections and/or chapters for this book. If at all possible, please use real Texinfo, instead of just supplying unformatted ASCII text (although even that is better than no documentation at all). Conventions to be followed in *GAWK: Effective AWK Programming* are provided after the '`@bye`' at the end of the Texinfo source file. If possible, please update the `man` page as well.

   You will also have to sign paperwork for your documentation changes.

7. Submit changes as context diffs or unified diffs. Use '`diff -c -r -N`' or '`diff -u -r -N`' to compare the original `gawk` source tree with your version. (I find context diffs to be more readable but unified diffs are more compact.) I recommend using the GNU version of `diff`. Send the output produced by either run of `diff` to me when you submit your changes. (See Section B.5 [Reporting Problems and Bugs], page 276, for the electronic mail information.)

   Using this format makes it easy for me to apply your changes to the master version of the `gawk` source code (using `patch`). If I have to apply the changes manually, using a text editor, I may not do so, particularly if there are lots of changes.
8. Include an entry for the '`ChangeLog`' file with your submission. This helps further minimize the amount of work I have to do, making it easier for me to accept patches.

Although this sounds like a lot of work, please remember that while you may write the new code, I have to maintain it and support it. If it isn't possible for me to do that with a minimum of extra work, then I probably will not.

C.2.2 Porting `gawk` to a New Operating System

If you want to port `gawk` to a new operating system, there are several steps:

1. Follow the guidelines in the previous section concerning coding style, submission of diffs, and so on.
2. When doing a port, bear in mind that your code must coexist peacefully with the rest of `gawk` and the other ports. Avoid gratuitous changes to the system-independent parts of the code. If at all possible, avoid sprinkling '`#ifdef`'s just for your port throughout the code.

   If the changes needed for a particular system affect too much of the code, I probably will not accept them. In such a case, you can, of course, distribute your changes on your own, as long as you comply with the GPL (see [GNU General Public License], page 309).
3. A number of the files that come with `gawk` are maintained by other people at the Free Software Foundation. Thus, you should not change them unless it is for a very good reason; i.e., changes are not out of the question, but changes to these files are scrutinized extra carefully. The files are '`getopt.h`', '`getopt.c`', '`getopt1.c`', '`regex.h`', '`regex.c`', '`dfa.h`', '`dfa.c`', '`install-sh`', and '`mkinstalldirs`'.
4. Be willing to continue to maintain the port. Non-Unix operating systems are supported by volunteers who maintain the code needed to compile and run `gawk` on their systems. If noone volunteers to maintain a port, it becomes unsupported and it may be necessary to remove it from the distribution.
5. Supply an appropriate '`gawkmisc.???`' file. Each port has its own '`gawkmisc.???`' that implements certain operating system specific functions. This is cleaner than a plethora of '`#ifdef`'s scattered throughout the code. The '`gawkmisc.c`' in the main source directory includes the appropriate '`gawkmisc.???`' file from each subdirectory. Be sure to update it as well.

   Each port's '`gawkmisc.???`' file has a suffix reminiscent of the machine or operating system for the port—for example, '`pc/gawkmisc.pc`' and '`vms/gawkmisc.vms`'. The use of separate suffixes, instead of plain '`gawkmisc.c`', makes it possible to move files

from a port's subdirectory into the main subdirectory, without accidentally destroying the real '`gawkmisc.c`' file. (Currently, this is only an issue for the PC operating system ports.)

6. Supply a '`Makefile`' as well as any other C source and header files that are necessary for your operating system. All your code should be in a separate subdirectory, with a name that is the same as, or reminiscent of, either your operating system or the computer system. If possible, try to structure things so that it is not necessary to move files out of the subdirectory into the main source directory. If that is not possible, then be sure to avoid using names for your files that duplicate the names of files in the main source directory.
7. Update the documentation. Please write a section (or sections) for this book describing the installation and compilation steps needed to compile and/or install `gawk` for your system.
8. Be prepared to sign the appropriate paperwork. In order for the FSF to distribute your code, you must either place your code in the public domain and submit a signed statement to that effect, or assign the copyright in your code to the FSF.

Following these steps makes it much easier to integrate your changes into `gawk` and have them coexist happily with other operating systems' code that is already there.

In the code that you supply and maintain, feel free to use a coding style and brace layout that suits your taste.

C.3 Adding New Built-in Functions to `gawk`

> *Danger Will Robinson! Danger!!*
> *Warning! Warning!*
> The Robot

Beginning with `gawk` 3.1, it is possible to add new built-in functions to `gawk` using dynamically loaded libraries. This facility is available on systems (such as GNU/Linux) that support the `dlopen` and `dlsym` functions. This section describes how to write and use dynamically loaded extensions for `gawk`. Experience with programming in C or C++ is necessary when reading this section.

Caution: The facilities described in this section are very much subject to change in a future `gawk` release. Be aware that you may have to re-do everything, perhaps from scratch, at some future time.

C.3.1 A Minimal Introduction to `gawk` Internals

The truth is that `gawk` was not designed for simple extensibility. The facilities for adding functions using shared libraries work, but are something of a "bag on the side." Thus, this tour is brief and simplistic; would-be `gawk` hackers are encouraged to spend some time reading the source code before trying to write extensions based on the material presented here. Of particular note are the files '`awk.h`', '`builtin.c`', and '`eval.c`'. Reading '`awk.y`' in order to see how the parse tree is built would also be of use.

With the disclaimers out of the way, the following types, structure members, functions, and macros are declared in '`awk.h`' and are of use when writing extensions. The next section shows how they are used:

`AWKNUM` An `AWKNUM` is the internal type of `awk` floating-point numbers. Typically, it is a C `double`.

`NODE` Just about everything is done using objects of type `NODE`. These contain both strings and numbers, as well as variables and arrays.

`AWKNUM force_number(NODE *n)`
This macro forces a value to be numeric. It returns the actual numeric value contained in the node. It may end up calling an internal `gawk` function.

`void force_string(NODE *n)`
This macro guarantees that a `NODE`'s string value is current. It may end up calling an internal `gawk` function. It also guarantees that the string is zero-terminated.

`size_t get_curfunc_arg_count(void)`
This function returns the actual number of parameters passed to the current function. Inside the code of an extension this can be used to determine the maximum index which is safe to use with `stack_ptr`. If this value is greater than `tree->param_cnt`, the function was called incorrectly from the `awk` program.

Caution: This function is new as of `gawk` 3.1.4.

`n->param_cnt`
Inside an extension function, this is the maximum number of expected parameters, as set by the `make_builtin` function.

`n->stptr`
`n->stlen` The data and length of a `NODE`'s string value, respectively. The string is *not* guaranteed to be zero-terminated. If you need to pass the string value to a C library function, save the value in `n->stptr[n->stlen]`, assign `'\0'` to it, call the routine, and then restore the value.

`n->type` The type of the `NODE`. This is a C `enum`. Values should be either `Node_var` or `Node_var_array` for function parameters.

`n->vname` The "variable name" of a node. This is not of much use inside externally written extensions.

`void assoc_clear(NODE *n)`
Clears the associative array pointed to by `n`. Make sure that '`n->type == Node_var_array`' first.

`NODE **assoc_lookup(NODE *symbol, NODE *subs, int reference)`
Finds, and installs if necessary, array elements. `symbol` is the array, `subs` is the subscript. This is usually a value created with `tmp_string` (see below). `reference` should be `TRUE` if it is an error to use the value before it is created. Typically, `FALSE` is the correct value to use from extension functions.

`NODE *make_string(char *s, size_t len)`
Take a C string and turn it into a pointer to a `NODE` that can be stored appropriately. This is permanent storage; understanding of `gawk` memory management is helpful.

`NODE *make_number(AWKNUM val)`
: Take an `AWKNUM` and turn it into a pointer to a `NODE` that can be stored appropriately. This is permanent storage; understanding of `gawk` memory management is helpful.

`NODE *tmp_string(char *s, size_t len);`
: Take a C string and turn it into a pointer to a `NODE` that can be stored appropriately. This is temporary storage; understanding of `gawk` memory management is helpful.

`NODE *tmp_number(AWKNUM val)`
: Take an `AWKNUM` and turn it into a pointer to a `NODE` that can be stored appropriately. This is temporary storage; understanding of `gawk` memory management is helpful.

`NODE *dupnode(NODE *n)`
: Duplicate a node. In most cases, this increments an internal reference count instead of actually duplicating the entire `NODE`; understanding of `gawk` memory management is helpful.

`void free_temp(NODE *n)`
: This macro releases the memory associated with a `NODE` allocated with `tmp_string` or `tmp_number`. Understanding of `gawk` memory management is helpful.

`void make_builtin(char *name, NODE *(*func)(NODE *), int count)`
: Register a C function pointed to by `func` as new built-in function `name`. `name` is a regular C string. `count` is the maximum number of arguments that the function takes. The function should be written in the following manner:

```
/* do_xxx --- do xxx function for gawk */

NODE *
do_xxx(NODE *tree)
{
    ...
}
```

`NODE *get_argument(NODE *tree, int i)`
: This function is called from within a C extension function to get the `i`-th argument from the function call. The first argument is argument zero.

`NODE *get_actual_argument(NODE *tree, unsigned int i,`
`int optional, int wantarray);`
: This function retrieves a particular argument `i`. `wantarray` is `TRUE` if the argument should be an array, `FALSE` otherwise. If `optional` is `TRUE`, the argument need not have been supplied. If it wasn't, the return value is `NULL`. It is a fatal error if `optional` is `TRUE` but the argument was not provided.

  Caution: This function is new as of `gawk` 3.1.4.

`get_scalar_argument(t, i, opt)`
: This is a convenience macro that calls `get_actual_argument`.

  Caution: This macro is new as of `gawk` 3.1.4.

`get_array_argument(t, i, opt)`
: This is a convenience macro that calls `get_actual_argument`.

  Caution: This macro is new as of `gawk` 3.1.4.

`void set_value(NODE *tree)`
: This function is called from within a C extension function to set the return value from the extension function. This value is what the `awk` program sees as the return value from the new `awk` function.

`void update_ERRNO(void)`
: This function is called from within a C extension function to set the value of `gawk`'s `ERRNO` variable, based on the current value of the C `errno` variable. It is provided as a convenience.

An argument that is supposed to be an array needs to be handled with some extra code, in case the array being passed in is actually from a function parameter.

In versions of `gawk` up to and including 3.1.2, the following boilerplate code shows how to do this:

```
NODE *the_arg;

the_arg = get_argument(tree, 2); /* assume need 3rd arg, 0-based */

/* if a parameter, get it off the stack */
if (the_arg->type == Node_param_list)
    the_arg = stack_ptr[the_arg->param_cnt];

/* parameter referenced an array, get it */
if (the_arg->type == Node_array_ref)
    the_arg = the_arg->orig_array;

/* check type */
if (the_arg->type != Node_var && the_arg->type != Node_var_array)
    fatal("newfunc: third argument is not an array");

/* force it to be an array, if necessary, clear it */
the_arg->type = Node_var_array;
assoc_clear(the_arg);
```

For versions 3.1.3 and later, the internals changed. In particular, the interface was actually *simplified* drastically. The following boilerplate code now suffices:

```
NODE *the_arg;

the_arg = get_argument(tree, 2); /* assume need 3rd arg, 0-based */

/* force it to be an array: */
the_arg = get_array(the_arg);

/* if necessary, clear it: */
assoc_clear(the_arg);
```

As of version 3.1.4, the internals improved again, and became even simpler:

```
NODE *the_arg;

the_arg = get_array_argument(tree, 2, FALSE); /* assume need 3rd arg, 0-based */
```

Again, you should spend time studying the `gawk` internals; don't just blindly copy this code.

C.3.2 Directory and File Operation Built-ins

Two useful functions that are not in `awk` are `chdir` (so that an `awk` program can change its directory) and `stat` (so that an `awk` program can gather information about a file). This section implements these functions for `gawk` in an external extension library.

C.3.2.1 Using `chdir` and `stat`

This section shows how to use the new functions at the `awk` level once they've been integrated into the running `gawk` interpreter. Using `chdir` is very straightforward. It takes one argument, the new directory to change to:

```
...
newdir = "/home/arnold/funstuff"
ret = chdir(newdir)
if (ret < 0) {
    printf("could not change to %s: %s\n",
                   newdir, ERRNO) > "/dev/stderr"
    exit 1
}
...
```

The return value is negative if the `chdir` failed, and `ERRNO` (see Section 6.5 [Built-in Variables], page 107) is set to a string indicating the error.

Using `stat` is a bit more complicated. The C `stat` function fills in a structure that has a fair amount of information. The right way to model this in `awk` is to fill in an associative array with the appropriate information:

```
file = "/home/arnold/.profile"
fdata[1] = "x"    # force 'fdata' to be an array
ret = stat(file, fdata)
if (ret < 0) {
    printf("could not stat %s: %s\n",
             file, ERRNO) > "/dev/stderr"
    exit 1
}
printf("size of %s is %d bytes\n", file, fdata["size"])
```

The `stat` function always clears the data array, even if the `stat` fails. It fills in the following elements:

`"name"` The name of the file that was `stat`'ed.

`"dev"`
`"ino"` The file's device and inode numbers, respectively.

`"mode"` The file's mode, as a numeric value. This includes both the file's type and its permissions.

`"nlink"` The number of hard links (directory entries) the file has.

`"uid"`
`"gid"` The numeric user and group ID numbers of the file's owner.

`"size"` The size in bytes of the file.

`"blocks"` The number of disk blocks the file actually occupies. This may not be a function of the file's size if the file has holes.

`"atime"`
`"mtime"`
`"ctime"` The file's last access, modification, and inode update times, respectively. These are numeric timestamps, suitable for formatting with `strftime` (see Section 8.1 [Built-in Functions], page 127).

`"pmode"` The file's "printable mode." This is a string representation of the file's type and permissions, such as what is produced by '`ls -l`'—for example, `"drwxr-xr-x"`.

`"type"` A printable string representation of the file's type. The value is one of the following:

`"blockdev"`
`"chardev"`
: The file is a block or character device ("special file").

`"directory"`
: The file is a directory.

`"fifo"` The file is a named-pipe (also known as a FIFO).

`"file"` The file is just a regular file.

`"socket"` The file is an `AF_UNIX` ("Unix domain") socket in the filesystem.

`"symlink"`
: The file is a symbolic link.

Several additional elements may be present depending upon the operating system and the type of the file. You can test for them in your `awk` program by using the `in` operator (see Section 7.2 [Referring to an Array Element], page 117):

`"blksize"`
: The preferred block size for I/O to the file. This field is not present on all POSIX-like systems in the C `stat` structure.

`"linkval"`
: If the file is a symbolic link, this element is the name of the file the link points to (i.e., the value of the link).

`"rdev"`
`"major"`
`"minor"` If the file is a block or character device file, then these values represent the numeric device number and the major and minor components of that number, respectively.

C.3.2.2 C Code for `chdir` and `stat`

Here is the C code for these extensions. They were written for GNU/Linux. The code needs some more work for complete portability to other POSIX-compliant systems:[1]

[1] This version is edited slightly for presentation. The complete version can be found in '`extension/filefuncs.c`' in the `gawk` distribution.

```
#include "awk.h"

#include <sys/sysmacros.h>

/*  do_chdir --- provide dynamically loaded
                 chdir() builtin for gawk */

static NODE *
do_chdir(tree)
NODE *tree;
{
    NODE *newdir;
    int ret = -1;

    if (do_lint && get_curfunc_arg_count() != 1)
        lintwarn("chdir: called with incorrect number of arguments");

    newdir = get_scalar_argument(tree, 0);
```

The file includes the `"awk.h"` header file for definitions for the `gawk` internals. It includes `<sys/sysmacros.h>` for access to the `major` and `minor` macros.

By convention, for an `awk` function `foo`, the function that implements it is called '`do_foo`'. The function should take a '`NODE *`' argument, usually called `tree`, that represents the argument list to the function. The `newdir` variable represents the new directory to change to, retrieved with `get_argument`. Note that the first argument is numbered zero.

This code actually accomplishes the `chdir`. It first forces the argument to be a string and passes the string value to the `chdir` system call. If the `chdir` fails, `ERRNO` is updated. The result of `force_string` has to be freed with `free_temp`:

```
    (void) force_string(newdir);
    ret = chdir(newdir->stptr);
    if (ret < 0)
        update_ERRNO();
    free_temp(newdir);
```

Finally, the function returns the return value to the `awk` level, using `set_value`. Then it must return a value from the call to the new built-in (this value ignored by the interpreter):

```
    /* Set the return value */
    set_value(tmp_number((AWKNUM) ret));

    /* Just to make the interpreter happy */
    return tmp_number((AWKNUM) 0);
}
```

The `stat` built-in is more involved. First comes a function that turns a numeric mode into a printable representation (e.g., 644 becomes '`-rw-r--r--`'). This is omitted here for brevity:

```
/* format_mode --- turn a stat mode field
                   into something readable */
```

```
static char *
format_mode(fmode)
unsigned long fmode;
{
    ...
}
```

Next comes the actual `do_stat` function itself. First come the variable declarations and argument checking:

```
/* do_stat --- provide a stat() function for gawk */

static NODE *
do_stat(tree)
NODE *tree;
{
    NODE *file, *array;
    struct stat sbuf;
    int ret;
    NODE **aptr;
    char *pmode;    /* printable mode */
    char *type = "unknown";


    if (do_lint && get_curfunc_arg_count() > 2)
        lintwarn("stat: called with too many arguments");
```

Then comes the actual work. First, we get the arguments. Then, we always clear the array. To get the file information, we use `lstat`, in case the file is a symbolic link. If there's an error, we set `ERRNO` and return:

```
    /* directory is first arg, array to hold results is second */
    file = get_scalar_argument(tree, 0, FALSE);
    array = get_array_argument(tree, 1, FALSE);

    /* empty out the array */
    assoc_clear(array);

    /* lstat the file, if error, set ERRNO and return */
    (void) force_string(file);
    ret = lstat(file->stptr, & sbuf);
    if (ret < 0) {
        update_ERRNO();

        set_value(tmp_number((AWKNUM) ret));

        free_temp(file);
        return tmp_number((AWKNUM) 0);
    }
```

Now comes the tedious part: filling in the array. Only a few of the calls are shown here, since they all follow the same pattern:

```
    /* fill in the array */
    aptr = assoc_lookup(array, tmp_string("name", 4), FALSE);
    *aptr = dupnode(file);

    aptr = assoc_lookup(array, tmp_string("mode", 4), FALSE);
    *aptr = make_number((AWKNUM) sbuf.st_mode);

    aptr = assoc_lookup(array, tmp_string("pmode", 5), FALSE);
    pmode = format_mode(sbuf.st_mode);
    *aptr = make_string(pmode, strlen(pmode));
```

When done, we free the temporary value containing the file name, set the return value, and return:

```
    free_temp(file);

    /* Set the return value */
    set_value(tmp_number((AWKNUM) ret));

    /* Just to make the interpreter happy */
    return tmp_number((AWKNUM) 0);
}
```

Finally, it's necessary to provide the "glue" that loads the new function(s) into `gawk`. By convention, each library has a routine named `dlload` that does the job:

```
/* dlload --- load new builtins in this library */

NODE *
dlload(tree, dl)
NODE *tree;
void *dl;
{
    make_builtin("chdir", do_chdir, 1);
    make_builtin("stat", do_stat, 2);
    return tmp_number((AWKNUM) 0);
}
```

And that's it! As an exercise, consider adding functions to implement system calls such as `chown`, `chmod`, and `umask`.

C.3.2.3 Integrating the Extensions

Now that the code is written, it must be possible to add it at runtime to the running `gawk` interpreter. First, the code must be compiled. Assuming that the functions are in a file named '`filefuncs.c`', and *idir* is the location of the `gawk` include files, the following steps create a GNU/Linux shared library:

```
$ gcc -shared -DHAVE_CONFIG_H -c -O -g -Iidir filefuncs.c
$ ld -o filefuncs.so -shared filefuncs.o
```

Once the library exists, it is loaded by calling the `extension` built-in function. This function takes two arguments: the name of the library to load and the name of a function to call when the library is first loaded. This function adds the new functions to `gawk`. It returns the value returned by the initialization function within the shared library:

```
# file testff.awk
BEGIN {
    extension("./filefuncs.so", "dlload")

    chdir(".")  # no-op

    data[1] = 1 # force 'data' to be an array
    print "Info for testff.awk"
    ret = stat("testff.awk", data)
    print "ret =", ret
    for (i in data)
        printf "data[\"%s\"] = %s\n", i, data[i]
    print "testff.awk modified:",
        strftime("%m %d %y %H:%M:%S", data["mtime"])
}
```

Here are the results of running the program:

```
$ gawk -f testff.awk
⊣ Info for testff.awk
⊣ ret = 0
⊣ data["blksize"] = 4096
⊣ data["mtime"] = 932361936
⊣ data["mode"] = 33188
⊣ data["type"] = file
⊣ data["dev"] = 2065
⊣ data["gid"] = 10
⊣ data["ino"] = 878597
⊣ data["ctime"] = 971431797
⊣ data["blocks"] = 2
⊣ data["nlink"] = 1
⊣ data["name"] = testff.awk
⊣ data["atime"] = 971608519
⊣ data["pmode"] = -rw-r--r--
⊣ data["size"] = 607
⊣ data["uid"] = 2076
⊣ testff.awk modified: 07 19 99 08:25:36
```

C.4 Probable Future Extensions

AWK is a language similar to PERL, only considerably more elegant.
Arnold Robbins

Hey!
Larry Wall

This section briefly lists extensions and possible improvements that indicate the directions we are currently considering for `gawk`. The file '`FUTURES`' in the `gawk` distribution lists these extensions as well.

Following is a list of probable future changes visible at the `awk` language level:

Loadable module interface
: It is not clear that the `awk`-level interface to the modules facility is as good as it should be. The interface needs to be redesigned, particularly taking namespace issues into account, as well as possibly including issues such as library search path order and versioning.

`RECLEN` variable for fixed-length records
: Along with `FIELDWIDTHS`, this would speed up the processing of fixed-length records. `PROCINFO["RS"]` would be `"RS"` or `"RECLEN"`, depending upon which kind of record processing is in effect.

Additional `printf` specifiers
: The 1999 ISO C standard added a number of additional `printf` format specifiers. These should be evaluated for possible inclusion in `gawk`.

Databases
: It may be possible to map a GDBM/NDBM/SDBM file into an `awk` array.

Large character sets
: It would be nice if `gawk` could handle UTF-8 and other character sets that are larger than eight bits. (`gawk` currently has partial multi-byte support, but it needs an expert to really think out the multi-byte issues and consult with the maintainer on the appropriate changes.)

More `lint` warnings
: There are more things that could be checked for portability.

Following is a list of probable improvements that will make `gawk`'s source code easier to work with:

Loadable module mechanics
: The current extension mechanism works (see Section C.3 [Adding New Built-in Functions to `gawk`], page 282), but is rather primitive. It requires a fair amount of manual work to create and integrate a loadable module. Nor is the current mechanism as portable as might be desired. The GNU `libtool` package provides a number of features that would make using loadable modules much easier. `gawk` should be changed to use `libtool`.

Loadable module internals
: The API to its internals that `gawk` "exports" should be revised. Too many things are needlessly exposed. A new API should be designed and implemented to make module writing easier.

Better array subscript management
: `gawk`'s management of array subscript storage could use revamping, so that using the same value to index multiple arrays only stores one copy of the index value.

Integrating the DBUG library
: Integrating Fred Fish's DBUG library would be helpful during development, but it's a lot of work to do.

Following is a list of probable improvements that will make `gawk` perform better:

Compilation of `awk` programs
: `gawk` uses a Bison (YACC-like) parser to convert the script given it into a syntax tree; the syntax tree is then executed by a simple recursive evaluator. This method incurs a lot of overhead, since the recursive evaluator performs many procedure calls to do even the simplest things.

  It should be possible for `gawk` to convert the script's parse tree into a C program which the user would then compile, using the normal C compiler and a special `gawk` library to provide all the needed functions (regexps, fields, associative arrays, type coercion, and so on).

  An easier possibility might be for an intermediate phase of `gawk` to convert the parse tree into a linear byte code form like the one used in GNU Emacs Lisp. The recursive evaluator would then be replaced by a straight line byte code interpreter that would be intermediate in speed between running a compiled program and doing what `gawk` does now.

Finally, the programs in the test suite could use documenting in this book.

See Section C.2 [Making Additions to `gawk`], page 279, if you are interested in tackling any of these projects.

Appendix D Basic Programming Concepts

This appendix attempts to define some of the basic concepts and terms that are used throughout the rest of this book. As this book is specifically about `awk`, and not about computer programming in general, the coverage here is by necessity fairly cursory and simplistic. (If you need more background, there are many other introductory texts that you should refer to instead.)

D.1 What a Program Does

At the most basic level, the job of a program is to process some input data and produce results.

The "program" in the figure can be either a compiled program[1] (such as `ls`), or it may be *interpreted*. In the latter case, a machine-executable program such as `awk` reads your program, and then uses the instructions in your program to process the data.

When you write a program, it usually consists of the following, very basic set of steps:

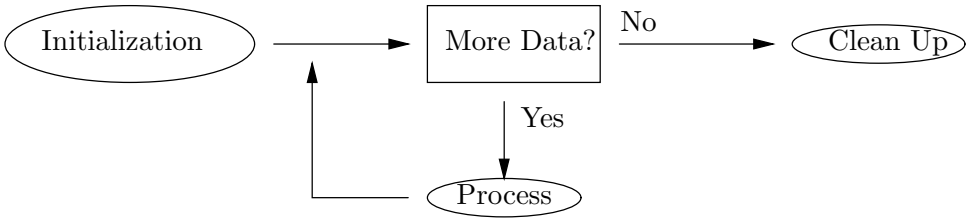

Initialization

These are the things you do before actually starting to process data, such as checking arguments, initializing any data you need to work with, and so on. This step corresponds to `awk`'s `BEGIN` rule (see Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96).

If you were baking a cake, this might consist of laying out all the mixing bowls and the baking pan, and making sure you have all the ingredients that you need.

Processing This is where the actual work is done. Your program reads data, one logical chunk at a time, and processes it as appropriate.

In most programming languages, you have to manually manage the reading of data, checking to see if there is more each time you read a chunk. `awk`'s pattern-action paradigm (see Chapter 1 [Getting Started with `awk`], page 11) handles the mechanics of this for you.

In baking a cake, the processing corresponds to the actual labor: breaking eggs, mixing the flour, water, and other ingredients, and then putting the cake into the oven.

[1] Compiled programs are typically written in lower-level languages such as C, C++, Fortran, or Ada, and then translated, or *compiled*, into a form that the computer can execute directly.

Clean Up — Once you've processed all the data, you may have things you need to do before exiting. This step corresponds to `awk`'s `END` rule (see Section 6.1.4 [The `BEGIN` and `END` Special Patterns], page 96).

After the cake comes out of the oven, you still have to wrap it in plastic wrap to keep anyone from tasting it, as well as wash the mixing bowls and utensils.

An *algorithm* is a detailed set of instructions necessary to accomplish a task, or process data. It is much the same as a recipe for baking a cake. Programs implement algorithms. Often, it is up to you to design the algorithm and implement it, simultaneously.

The "logical chunks" we talked about previously are called *records*, similar to the records a company keeps on employees, a school keeps for students, or a doctor keeps for patients. Each record has many component parts, such as first and last names, date of birth, address, and so on. The component parts are referred to as the *fields* of the record.

The act of reading data is termed *input*, and that of generating results, not too surprisingly, is termed *output*. They are often referred to together as "input/output," and even more often, as "I/O" for short. (You will also see "input" and "output" used as verbs.)

`awk` manages the reading of data for you, as well as the breaking it up into records and fields. Your program's job is to tell `awk` what to with the data. You do this by describing *patterns* in the data to look for, and *actions* to execute when those patterns are seen. This *data-driven* nature of `awk` programs usually makes them both easier to write and easier to read.

D.2 Data Values in a Computer

In a program, you keep track of information and values in things called *variables*. A variable is just a name for a given value, such as `first_name`, `last_name`, `address`, and so on. `awk` has several predefined variables, and it has special names to refer to the current input record and the fields of the record. You may also group multiple associated values under one name, as an array.

Data, particularly in `awk`, consists of either numeric values, such as 42 or 3.1415927, or string values. String values are essentially anything that's not a number, such as a name. Strings are sometimes referred to as *character data*, since they store the individual characters that comprise them. Individual variables, as well as numeric and string variables, are referred to as *scalar* values. Groups of values, such as arrays, are not scalars.

Within computers, there are two kinds of numeric values: *integers* and *floating-point*. In school, integer values were referred to as "whole" numbers—that is, numbers without any fractional part, such as 1, 42, or −17. The advantage to integer numbers is that they represent values exactly. The disadvantage is that their range is limited. On most modern systems, this range is −2,147,483,648 to 2,147,483,647.

Integer values come in two flavors: *signed* and *unsigned*. Signed values may be negative or positive, with the range of values just described. Unsigned values are always positive. On most modern systems, the range is from 0 to 4,294,967,295.

Floating-point numbers represent what are called "real" numbers; i.e., those that do have a fractional part, such as 3.1415927. The advantage to floating-point numbers is that they can represent a much larger range of values. The disadvantage is that there are numbers that they cannot represent exactly. `awk` uses *double-precision* floating-point numbers, which

can hold more digits than *single-precision* floating-point numbers. Floating-point issues are discussed more fully in Section D.3 [Floating-Point Number Caveats], page 296.

At the very lowest level, computers store values as groups of binary digits, or *bits*. Modern computers group bits into groups of eight, called *bytes*. Advanced applications sometimes have to manipulate bits directly, and `gawk` provides functions for doing so.

While you are probably used to the idea of a number without a value (i.e., zero), it takes a bit more getting used to the idea of zero-length character data. Nevertheless, such a thing exists. It is called the *null string*. The null string is character data that has no value. In other words, it is empty. It is written in `awk` programs like this: `""`.

Humans are used to working in decimal; i.e., base 10. In base 10, numbers go from 0 to 9, and then "roll over" into the next column. (Remember grade school? 42 is 4 times 10 plus 2.)

There are other number bases though. Computers commonly use base 2 or *binary*, base 8 or *octal*, and base 16 or *hexadecimal*. In binary, each column represents two times the value in the column to its right. Each column may contain either a 0 or a 1. Thus, binary 1010 represents 1 times 8, plus 0 times 4, plus 1 times 2, plus 0 times 1, or decimal 10. Octal and hexadecimal are discussed more in Section 5.1.2 [Octal and Hexadecimal Numbers], page 73.

Programs are written in programming languages. Hundreds, if not thousands, of programming languages exist. One of the most popular is the C programming language. The C language had a very strong influence on the design of the `awk` language.

There have been several versions of C. The first is often referred to as "K&R" C, after the initials of Brian Kernighan and Dennis Ritchie, the authors of the first book on C. (Dennis Ritchie created the language, and Brian Kernighan was one of the creators of `awk`.)

In the mid-1980s, an effort began to produce an international standard for C. This work culminated in 1989, with the production of the ANSI standard for C. This standard became an ISO standard in 1990. Where it makes sense, POSIX `awk` is compatible with 1990 ISO C.

In 1999, a revised ISO C standard was approved and released. Future versions of `gawk` will be as compatible as possible with this standard.

D.3 Floating-Point Number Caveats

As mentioned earlier, floating-point numbers represent what are called "real" numbers, i.e., those that have a fractional part. `awk` uses double-precision floating-point numbers to represent all numeric values. This section describes some of the issues involved in using floating-point numbers.

There is a very nice paper on floating-point arithmetic by David Goldberg, "What Every Computer Scientist Should Know About Floating-point Arithmetic," *ACM Computing Surveys* **23**, 1 (1991-03), 5-48.[2] This is worth reading if you are interested in the details, but it does require a background in computer science.

Internally, `awk` keeps both the numeric value (double-precision floating-point) and the string value for a variable. Separately, `awk` keeps track of what type the variable has (see

[2] `http://www.validlab.com/goldberg/paper.ps`.

Section 5.10 [Variable Typing and Comparison Expressions], page 85), which plays a role in how variables are used in comparisons.

It is important to note that the string value for a number may not reflect the full value (all the digits) that the numeric value actually contains. The following program ('`values.awk`') illustrates this:

```
{
   $1 = $2 + $3
   # see it for what it is
   printf("$1 = %.12g\n", $1)
   # use CONVFMT
   a = "<" $1 ">"
   print "a =", a
   # use OFMT
   print "$1 =", $1
}
```

This program shows the full value of the sum of `$2` and `$3` using `printf`, and then prints the string values obtained from both automatic conversion (via `CONVFMT`) and from printing (via `OFMT`).

Here is what happens when the program is run:

```
$ echo 2 3.654321 1.2345678 | awk -f values.awk
⊣ $1 = 4.8888888
⊣ a = <4.88889>
⊣ $1 = 4.88889
```

This makes it clear that the full numeric value is different from what the default string representations show.

`CONVFMT`'s default value is `"%.6g"`, which yields a value with at least six significant digits. For some applications, you might want to change it to specify more precision. On most modern machines, most of the time, 17 digits is enough to capture a floating-point number's value exactly.[3]

Unlike numbers in the abstract sense (such as what you studied in high school or college math), numbers stored in computers are limited in certain ways. They cannot represent an infinite number of digits, nor can they always represent things exactly. In particular, floating-point numbers cannot always represent values exactly. Here is an example:

```
$ awk '{ printf("%010d\n", $1 * 100) }'
515.79
⊣ 0000051579
515.80
⊣ 0000051579
515.81
⊣ 0000051580
515.82
⊣ 0000051582
Ctrl-d
```

[3] Pathological cases can require up to 752 digits (!), but we doubt that you need to worry about this.

This shows that some values can be represented exactly, whereas others are only approximated. This is not a "bug" in `awk`, but simply an artifact of how computers represent numbers.

Another peculiarity of floating-point numbers on modern systems is that they often have more than one representation for the number zero! In particular, it is possible to represent "minus zero" as well as regular, or "positive" zero.

This example shows that negative and positive zero are distinct values when stored internally, but that they are in fact equal to each other, as well as to "regular" zero:

```
$ gawk 'BEGIN { mz = -0 ; pz = 0
> printf "-0 = %g, +0 = %g, (-0 == +0) -> %d\n", mz, pz, mz == pz
> printf "mz == 0 -> %d, pz == 0 -> %d\n", mz == 0, pz == 0
> }'
-| -0 = -0, +0 = 0, (-0 == +0) -> 1
-| mz == 0 -> 1, pz == 0 -> 1
```

It helps to keep this in mind should you process numeric data that contains negative zero values; the fact that the zero is negative is noted and can affect comparisons.

Glossary

Action
: A series of `awk` statements attached to a rule. If the rule's pattern matches an input record, `awk` executes the rule's action. Actions are always enclosed in curly braces. (See Section 6.3 [Actions], page 98.)

Amazing `awk` Assembler
: Henry Spencer at the University of Toronto wrote a retargetable assembler completely as `sed` and `awk` scripts. It is thousands of lines long, including machine descriptions for several eight-bit microcomputers. It is a good example of a program that would have been better written in another language. You can get it from `ftp://ftp.freefriends.org/arnold/Awkstuff/aaa.tgz`.

Amazingly Workable Formatter (`awf`)
: Henry Spencer at the University of Toronto wrote a formatter that accepts a large subset of the '`nroff -ms`' and '`nroff -man`' formatting commands, using `awk` and `sh`. It is available over the Internet from `ftp://ftp.freefriends.org/arnold/Awkstuff/awf.tgz`.

Anchor
: The regexp metacharacters '`^`' and '`$`', which force the match to the beginning or end of the string, respectively.

ANSI
: The American National Standards Institute. This organization produces many standards, among them the standards for the C and C++ programming languages. These standards often become international standards as well. See also "ISO."

Array
: A grouping of multiple values under the same name. Most languages just provide sequential arrays. `awk` provides associative arrays.

Assertion
: A statement in a program that a condition is true at this point in the program. Useful for reasoning about how a program is supposed to behave.

Assignment
: An `awk` expression that changes the value of some `awk` variable or data object. An object that you can assign to is called an *lvalue*. The assigned values are called *rvalues*. See Section 5.7 [Assignment Expressions], page 81.

Associative Array
: Arrays in which the indices may be numbers or strings, not just sequential integers in a fixed range.

`awk` Language
: The language in which `awk` programs are written.

`awk` Program
: An `awk` program consists of a series of *patterns* and *actions*, collectively known as *rules*. For each input record given to the program, the program's rules are all processed in turn. `awk` programs may also contain function definitions.

`awk` Script
: Another name for an `awk` program.

Bash
: The GNU version of the standard shell (the **B**ourne-**A**gain **SH**ell). See also "Bourne Shell."

BBS
: See "Bulletin Board System."

Bit
: Short for "Binary Digit." All values in computer memory ultimately reduce to binary digits: values that are either zero or one. Groups of bits may be interpreted differently—as integers, floating-point numbers, character data, addresses of other memory objects, or other data. `awk` lets you work with floating-point numbers and strings. `gawk` lets you manipulate bit values with the built-in functions described in Section 8.1.6 [Bit-Manipulation Functions of `gawk`], page 147.

  Computers are often defined by how many bits they use to represent integer values. Typical systems are 32-bit systems, but 64-bit systems are becoming increasingly popular, and 16-bit systems are waning in popularity.

Boolean Expression
: Named after the English mathematician Boole. See also "Logical Expression."

Bourne Shell
: The standard shell ('`/bin/sh`') on Unix and Unix-like systems, originally written by Steven R. Bourne. Many shells (`bash`, `ksh`, `pdksh`, `zsh`) are generally upwardly compatible with the Bourne shell.

Built-in Function
: The `awk` language provides built-in functions that perform various numerical, I/O-related, and string computations. Examples are `sqrt` (for the square root of a number) and `substr` (for a substring of a string). `gawk` provides functions for timestamp management, bit manipulation, and runtime string translation. (See Section 8.1 [Built-in Functions], page 127.)

Built-in Variable
: `ARGC`, `ARGV`, `CONVFMT`, `ENVIRON`, `FILENAME`, `FNR`, `FS`, `NF`, `NR`, `OFMT`, `OFS`, `ORS`, `RLENGTH`, `RSTART`, `RS`, and `SUBSEP` are the variables that have special meaning to `awk`. In addition, `ARGIND`, `BINMODE`, `ERRNO`, `FIELDWIDTHS`, `IGNORECASE`, `LINT`, `PROCINFO`, `RT`, and `TEXTDOMAIN` are the variables that have special meaning to `gawk`. Changing some of them affects `awk`'s running environment. (See Section 6.5 [Built-in Variables], page 107.)

Braces
: See "Curly Braces."

Bulletin Board System
: A computer system allowing users to log in and read and/or leave messages for other users of the system, much like leaving paper notes on a bulletin board.

C
: The system programming language that most GNU software is written in. The `awk` programming language has C-like syntax, and this book points out similarities between `awk` and C when appropriate.

  In general, `gawk` attempts to be as similar to the 1990 version of ISO C as makes sense. Future versions of `gawk` may adopt features from the newer 1999 standard, as appropriate.

C++
: A popular object-oriented programming language derived from C.

Character Set
: The set of numeric codes used by a computer system to represent the characters (letters, numbers, punctuation, etc.) of a particular country or place. The most common character set in use today is ASCII (American Standard Code for Information Interchange). Many European countries use an extension of ASCII known as ISO-8859-1 (ISO Latin-1).

CHEM
: A preprocessor for `pic` that reads descriptions of molecules and produces `pic` input for drawing them. It was written in `awk` by Brian Kernighan and Jon Bentley, and is available from `http://cm.bell-labs.com/netlib/typesetting/chem.gz`.

Coprocess
: A subordinate program with which two-way communications is possible.

Compiler
: A program that translates human-readable source code into machine-executable object code. The object code is then executed directly by the computer. See also "Interpreter."

Compound Statement
: A series of `awk` statements, enclosed in curly braces. Compound statements may be nested. (See Section 6.4 [Control Statements in Actions], page 99.)

Concatenation
: Concatenating two strings means sticking them together, one after another, producing a new string. For example, the string '`foo`' concatenated with the string '`bar`' gives the string '`foobar`'. (See Section 5.6 [String Concatenation], page 80.)

Conditional Expression
: An expression using the '`?:`' ternary operator, such as '*`expr1 ? expr2 : expr3`*'. The expression *expr1* is evaluated; if the result is true, the value of the whole expression is the value of *expr2*; otherwise the value is *expr3*. In either case, only one of *expr2* and *expr3* is evaluated. (See Section 5.12 [Conditional Expressions], page 89.)

Comparison Expression
: A relation that is either true or false, such as '`(a < b)`'. Comparison expressions are used in `if`, `while`, `do`, and `for` statements, and in patterns to select which input records to process. (See Section 5.10 [Variable Typing and Comparison Expressions], page 85.)

Curly Braces
: The characters '`{`' and '`}`'. Curly braces are used in `awk` for delimiting actions, compound statements, and function bodies.

Dark Corner
: An area in the language where specifications often were (or still are) not clear, leading to unexpected or undesirable behavior. Such areas are marked in this book with the picture of a flashlight in the margin and are indexed under the heading "dark corner."

Data Driven
: A description of `awk` programs, where you specify the data you are interested in processing, and what to do when that data is seen.

Data Objects
: These are numbers and strings of characters. Numbers are converted into strings and vice versa, as needed. (See Section 5.4 [Conversion of Strings and Numbers], page 77.)

Deadlock
: The situation in which two communicating processes are each waiting for the other to perform an action.

Double-Precision
: An internal representation of numbers that can have fractional parts. Double-precision numbers keep track of more digits than do single-precision numbers, but operations on them are sometimes more expensive. This is the way `awk` stores numeric values. It is the C type `double`.

Dynamic Regular Expression
: A dynamic regular expression is a regular expression written as an ordinary expression. It could be a string constant, such as `"foo"`, but it may also be an expression whose value can vary. (See Section 2.8 [Using Dynamic Regexps], page 34.)

Environment
: A collection of strings, of the form *name*=*val*, that each program has available to it. Users generally place values into the environment in order to provide information to various programs. Typical examples are the environment variables `HOME` and `PATH`.

Empty String
: See "Null String."

Epoch
: The date used as the "beginning of time" for timestamps. Time values in Unix systems are represented as seconds since the epoch, with library functions available for converting these values into standard date and time formats.

  The epoch on Unix and POSIX systems is 1970-01-01 00:00:00 UTC. See also "GMT" and "UTC."

Escape Sequences
: A special sequence of characters used for describing nonprinting characters, such as '`\n`' for newline or '`\033`' for the ASCII ESC (Escape) character. (See Section 2.2 [Escape Sequences], page 25.)

FDL
: See "Free Documentation License."

Field
: When `awk` reads an input record, it splits the record into pieces separated by whitespace (or by a separator regexp that you can change by setting the built-in variable `FS`). Such pieces are called fields. If the pieces are of fixed length, you can use the built-in variable `FIELDWIDTHS` to describe their lengths. (See Section 3.5 [Specifying How Fields Are Separated], page 43, and Section 3.6 [Reading Fixed-Width Data], page 47.)

Flag
: A variable whose truth value indicates the existence or nonexistence of some condition.

Floating-Point Number
: Often referred to in mathematical terms as a "rational" or real number, this is just a number that can have a fractional part. See also "Double-Precision" and "Single-Precision."

Format
: Format strings are used to control the appearance of output in the `strftime` and `sprintf` functions, and are used in the `printf` statement as well. Also, data conversions from numbers to strings are controlled by the format string contained in the built-in variable `CONVFMT`. (See Section 4.5.2 [Format-Control Letters], page 60.)

Free Documentation License
: This document describes the terms under which this book is published and may be copied. (See [GNU Free Documentation License], page 315.)

Function
: A specialized group of statements used to encapsulate general or program-specific tasks. `awk` has a number of built-in functions, and also allows you to define your own. (See Chapter 8 [Functions], page 127.)

FSF
: See "Free Software Foundation."

Free Software Foundation
: A nonprofit organization dedicated to the production and distribution of freely distributable software. It was founded by Richard M. Stallman, the author of the original Emacs editor. GNU Emacs is the most widely used version of Emacs today.

`gawk`
: The GNU implementation of `awk`.

General Public License
: This document describes the terms under which `gawk` and its source code may be distributed. (See [GNU General Public License], page 309.)

GMT
: "Greenwich Mean Time." This is the old term for UTC. It is the time of day used as the epoch for Unix and POSIX systems. See also "Epoch" and "UTC."

GNU
: "GNU's not Unix". An on-going project of the Free Software Foundation to create a complete, freely distributable, POSIX-compliant computing environment.

GNU/Linux
: A variant of the GNU system using the Linux kernel, instead of the Free Software Foundation's Hurd kernel. Linux is a stable, efficient, full-featured clone of Unix that has been ported to a variety of architectures. It is most popular on PC-class systems, but runs well on a variety of other systems too. The Linux kernel source code is available under the terms of the GNU General Public License, which is perhaps its most important aspect.

GPL
: See "General Public License."

Hexadecimal
: Base 16 notation, where the digits are `0`–`9` and `A`–`F`, with '`A`' representing 10, '`B`' representing 11, and so on, up to '`F`' for 15. Hexadecimal numbers are written in C using a leading '`0x`', to indicate their base. Thus, `0x12` is 18 (1 times 16 plus 2).

I/O
: Abbreviation for "Input/Output," the act of moving data into and/or out of a running program.

Input Record
: A single chunk of data that is read in by `awk`. Usually, an `awk` input record consists of one line of text. (See Section 3.1 [How Input Is Split into Records], page 36.)

Integer
: A whole number, i.e., a number that does not have a fractional part.

Internationalization
: The process of writing or modifying a program so that it can use multiple languages without requiring further source code changes.

Interpreter
: A program that reads human-readable source code directly, and uses the instructions in it to process data and produce results. `awk` is typically (but not always) implemented as an interpreter. See also "Compiler."

Interval Expression
: A component of a regular expression that lets you specify repeated matches of some part of the regexp. Interval expressions were not traditionally available in `awk` programs.

ISO
: The International Standards Organization. This organization produces international standards for many things, including programming languages, such as C and C++. In the computer arena, important standards like those for C, C++, and POSIX become both American national and ISO international standards simultaneously. This book refers to Standard C as "ISO C" throughout.

Keyword
: In the `awk` language, a keyword is a word that has special meaning. Keywords are reserved and may not be used as variable names.

  `gawk`'s keywords are: `BEGIN`, `END`, `if`, `else`, `while`, `do...while`, `for`, `for...in`, `break`, `continue`, `delete`, `next`, `nextfile`, `function`, `func`, and `exit`.

Lesser General Public License
: This document describes the terms under which binary library archives or shared objects, and their source code may be distributed.

Linux
: See "GNU/Linux."

LGPL
: See "Lesser General Public License."

Localization
: The process of providing the data necessary for an internationalized program to work in a particular language.

Logical Expression
: An expression using the operators for logic, AND, OR, and NOT, written '`&&`', '`||`', and '`!`' in `awk`. Often called Boolean expressions, after the mathematician who pioneered this kind of mathematical logic.

Lvalue
: An expression that can appear on the left side of an assignment operator. In most languages, lvalues can be variables or array elements. In `awk`, a field designator can also be used as an lvalue.

Matching
: The act of testing a string against a regular expression. If the regexp describes the contents of the string, it is said to *match* it.

Metacharacters
: Characters used within a regexp that do not stand for themselves. Instead, they denote regular expression operations, such as repetition, grouping, or alternation.

Null String
: A string with no characters in it. It is represented explicitly in `awk` programs by placing two double quote characters next to each other (`""`). It can appear in input data by having two successive occurrences of the field separator appear next to each other.

Number
: A numeric-valued data object. Modern `awk` implementations use double-precision floating-point to represent numbers. Very old `awk` implementations use single-precision floating-point.

Octal
: Base-eight notation, where the digits are `0`–`7`. Octal numbers are written in C using a leading '`0`', to indicate their base. Thus, `013` is 11 (one times 8 plus 3).

P1003.2
: See "POSIX."

Pattern
: Patterns tell `awk` which input records are interesting to which rules.

  A pattern is an arbitrary conditional expression against which input is tested. If the condition is satisfied, the pattern is said to *match* the input record. A typical pattern might compare the input record against a regular expression. (See Section 6.1 [Pattern Elements], page 93.)

POSIX
: The name for a series of standards that specify a Portable Operating System interface. The "IX" denotes the Unix heritage of these standards. The main standard of interest for `awk` users is *IEEE Standard for Information Technology, Standard 1003.2-1992, Portable Operating System Interface (POSIX) Part 2: Shell and Utilities*. Informally, this standard is often referred to as simply "P1003.2."

Precedence
: The order in which operations are performed when operators are used without explicit parentheses.

Private
: Variables and/or functions that are meant for use exclusively by library functions and not for the main `awk` program. Special care must be taken when naming such variables and functions. (See Section 12.1 [Naming Library Function Global Variables], page 181.)

Range (of input lines)
: A sequence of consecutive lines from the input file(s). A pattern can specify ranges of input lines for `awk` to process or it can specify single lines. (See Section 6.1 [Pattern Elements], page 93.)

Recursion
: When a function calls itself, either directly or indirectly. If this isn't clear, refer to the entry for "recursion."

Redirection
: Redirection means performing input from something other than the standard input stream, or performing output to something other than the standard output stream.

  You can redirect the output of the `print` and `printf` statements to a file or a system command, using the '`>`', '`>>`', '`|`', and '`|&`' operators. You can redirect input to the `getline` statement using the '`<`', '`|`', and '`|&`' operators. (See Section 4.6 [Redirecting Output of `print` and `printf`], page 65, and Section 3.8 [Explicit Input with `getline`], page 51.)

Regexp
: Short for *regular expression*. A regexp is a pattern that denotes a set of strings, possibly an infinite set. For example, the regexp '`R.*xp`' matches any string starting with the letter '`R`' and ending with the letters '`xp`'. In `awk`, regexps are used in patterns and in conditional expressions. Regexps may contain escape sequences. (See Chapter 2 [Regular Expressions], page 24.)

Regular Expression
: See "regexp."

Regular Expression Constant
: A regular expression constant is a regular expression written within slashes, such as `/foo/`. This regular expression is chosen when you write the `awk` program and cannot be changed during its execution. (See Section 2.1 [How to Use Regular Expressions], page 24.)

Rule
: A segment of an `awk` program that specifies how to process single input records. A rule consists of a *pattern* and an *action*. `awk` reads an input record; then, for each rule, if the input record satisfies the rule's pattern, `awk` executes the rule's action. Otherwise, the rule does nothing for that input record.

Rvalue
: A value that can appear on the right side of an assignment operator. In `awk`, essentially every expression has a value. These values are rvalues.

Scalar
: A single value, be it a number or a string. Regular variables are scalars; arrays and functions are not.

Search Path
: In `gawk`, a list of directories to search for `awk` program source files. In the shell, a list of directories to search for executable programs.

Seed
: The initial value, or starting point, for a sequence of random numbers.

`sed`
: See "Stream Editor."

Shell
: The command interpreter for Unix and POSIX-compliant systems. The shell works both interactively, and as a programming language for batch files, or shell scripts.

Short-Circuit
: The nature of the `awk` logical operators '`&&`' and '`||`'. If the value of the entire expression is determinable from evaluating just the lefthand side of these operators, the righthand side is not evaluated. (See Section 5.11 [Boolean Expressions], page 88.)

Side Effect
: A side effect occurs when an expression has an effect aside from merely producing a value. Assignment expressions, increment and decrement expressions, and function calls have side effects. (See Section 5.7 [Assignment Expressions], page 81.)

Single-Precision
: An internal representation of numbers that can have fractional parts. Single-precision numbers keep track of fewer digits than do double-precision numbers, but operations on them are sometimes less expensive in terms of CPU time. This is the type used by some very old versions of `awk` to store numeric values. It is the C type `float`.

Space
: The character generated by hitting the space bar on the keyboard.

Special File
: A file name interpreted internally by `gawk`, instead of being handed directly to the underlying operating system—for example, '`/dev/stderr`'. (See Section 4.7 [Special File Names in `gawk`], page 67.)

Stream Editor
: A program that reads records from an input stream and processes them one or more at a time. This is in contrast with batch programs, which may expect to read their input files in entirety before starting to do anything, as well as with interactive programs which require input from the user.

String
: A datum consisting of a sequence of characters, such as '`I am a string`'. Constant strings are written with double quotes in the `awk` language and may contain escape sequences. (See Section 2.2 [Escape Sequences], page 25.)

Tab
: The character generated by hitting the *`TAB`* key on the keyboard. It usually expands to up to eight spaces upon output.

Text Domain
: A unique name that identifies an application. Used for grouping messages that are translated at runtime into the local language.

Timestamp
: A value in the "seconds since the epoch" format used by Unix and POSIX systems. Used for the `gawk` functions `mktime`, `strftime`, and `systime`. See also "Epoch" and "UTC."

Unix
: A computer operating system originally developed in the early 1970's at AT&T Bell Laboratories. It initially became popular in universities around the world and later moved into commercial environments as a software development system and network server system. There are many commercial versions of Unix,

as well as several work-alike systems whose source code is freely available (such as GNU/Linux, NetBSD, FreeBSD, and OpenBSD).

UTC
: The accepted abbreviation for "Universal Coordinated Time." This is standard time in Greenwich, England, which is used as a reference time for day and date calculations. See also "Epoch" and "GMT."

Whitespace
: A sequence of space, TAB, or newline characters occurring inside an input record or a string.

GNU General Public License

Version 2, June 1991

Copyright © 1989, 1991 Free Software Foundation, Inc.
59 Temple Place, Suite 330, Boston, MA 02111, USA

Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software—to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

Terms and Conditions for Copying, Distribution and Modification

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

   Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

   You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

   a. You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

   b. You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

   c. If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

   These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:
   a. Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
   b. Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
   c. Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

   The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

   If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.
7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

   If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

   It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

   This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.
8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.
9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

   Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.
10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software

which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.
12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
one line to give the program's name and an idea of what it does.
Copyright (C) year  name of author

This program is free software; you can redistribute it and/or
modify it under the terms of the GNU General Public License
as published by the Free Software Foundation; either version 2
of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.  See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program; if not, write to the Free Software
Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111, USA.
```

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details
type 'show w'.  This is free software, and you are welcome
to redistribute it under certain conditions; type 'show c'
for details.
```

The hypothetical commands '`show w`' and '`show c`' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than '`show w`' and '`show c`'; they could even be mouse-clicks or menu items—whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright
interest in the program 'Gnomovision'
(which makes passes at compilers) written
by James Hacker.

signature of Ty Coon, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU Free Documentation License

Version 1.2, November 2002

Copyright © 2000,2001,2002 Free Software Foundation, Inc.
59 Temple Place, Suite 330, Boston, MA 02111-1307, USA

Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document *free* in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or non-commercially. Secondarily, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released

under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

2. VERBATIM COPYING

   You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and

that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

   If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

   If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

   If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

   It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

   You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

   A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.

B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.

C. State on the Title page the name of the publisher of the Modified Version, as the publisher.

D. Preserve all the copyright notices of the Document.

E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.

F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.

G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.

H. Include an unaltered copy of this License.

I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.

J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.

K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.

L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.

M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.

N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.

O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties—for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

   You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

   The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

   In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements."

6. COLLECTIONS OF DOCUMENTS

   You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

   You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

   A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called

an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

8. TRANSLATION

   Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warrany Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

   If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

9. TERMINATION

   You may not copy, modify, sublicense, or distribute the Document except as expressly provided for under this License. Any other attempt to copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

10. FUTURE REVISIONS OF THIS LICENSE

    The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See `http://www.gnu.org/copyleft/`.

    Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation.

ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

```
Copyright (C)  year  your name.
Permission is granted to copy, distribute and/or modify this document
under the terms of the GNU Free Documentation License, Version 1.2
or any later version published by the Free Software Foundation;
with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts.
A copy of the license is included in the section entitled ``GNU
Free Documentation License''.
```

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the "with...Texts." line with this:

```
with the Invariant Sections being list their titles, with
the Front-Cover Texts being list, and with the Back-Cover Texts
being list.
```

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

Index

!

! (exclamation point), ! operator 88, 91, 218
! (exclamation point), != operator 86, 91
! (exclamation point), !~ operator .. 24, 32, 34, 74, 86, 87, 91, 94
! operator 95, 218

"

" (double quote) 12, 15
" (double quote), regexp constants 34

#

(number sign), #! (executable scripts) 13
(number sign), #! (executable scripts), portability issues with 13
(number sign), commenting 14

$

$ (dollar sign) 27
$ (dollar sign), $ field operator 39, 91
$ (dollar sign), incrementing fields and arrays .. 84
$ field operator 39

%

% (percent sign), % operator 91
% (percent sign), %= operator 83, 92

&

& (ampersand), && operator 88, 91
& (ampersand), gsub/gensub/sub functions and 136

'

' (single quote) 11, 13, 15
' (single quote), vs. apostrophe 14
' (single quote), with double quotes 15

(

() (parentheses) 28
() (parentheses), pgawk program 171

*

* (asterisk), * operator, as multiplication operator 91
* (asterisk), * operator, as regexp operator 28
* (asterisk), * operator, null strings, matching 139
* (asterisk), ** operator 80, 91, 176
* (asterisk), **= operator 83, 92, 176
* (asterisk), *= operator 83, 92

+

+ (plus sign) 28
+ (plus sign), + operator 91
+ (plus sign), ++ operator 84, 91
+ (plus sign), += operator 82, 92
+ (plus sign), decrement/increment operators .. 83

,

, (comma), in range patterns 95

-

- (hyphen), - operator 91
- (hyphen), -- (decrement/increment) operator 91
- (hyphen), -- operator 84
- (hyphen), -= operator 83, 92
- (hyphen), filenames beginning with 174
- (hyphen), in character lists 29
--assign option 174
--compat option 174
--copyleft option 175
--copyright option 174
--disable-lint configuration option 264
--disable-nls configuration option 265
--dump-variables option 175, 182
--enable-portals configuration option .. 169, 264
--enable-switch configuration option 264
--field-separator option 173
--file option 173
--gen-po option 160, 175
--help option 175
--lint option 173, 175
--lint-old option 175
--non-decimal-data option 165, 175
--non-decimal-data option, strtonum function and 165
--posix option 176
--posix option, --traditional option and ... 176
--profile option 169, 176
--re-interval option 176
--source option 176, 177

`--traditional` option 174
`--traditional` option, `--posix` option and ... 176
`--usage` option 175
`--version` option 177
`--with-included-gettext` configuration option 164, 264
`--with-included-gettext` configuration option, configuring `gawk` with 264
`-f` option 12, 173
`-F` option 45, 173
`-F` option, `-Ft` sets `FS` to TAB 177
`-f` option, on command line 177
`-F` option, troubleshooting 180
`-mf`/`-mr` options 174
`-v` option 174
`-v` option, variables, assigning 76
`-W` option 174

.

. (period) 27
`.mo` files 157
`.mo` files, converting from `.po` 163
`.mo` files, specifying directory of 157, 158
`.po` files 156, 159
`.po` files, converting to `.mo` 163

/

/ (forward slash) 24
/ (forward slash), `/` operator 91
/ (forward slash), `/=` operator 83, 92
/ (forward slash), `/=` operator, vs. `/=.../` regexp constant 83
/ (forward slash), patterns and 94
`/=` operator vs. `/=.../` regexp constant 83
`/dev/...` special files (`gawk`) 68
`/inet/` files (`gawk`) 168
`/p` files (`gawk`) 169

;

; (semicolon) 22
; (semicolon), `AWKPATH` variable and 270
; (semicolon), separating statements in actions 98, 99

<

< (left angle bracket), `<` operator 86, 91
< (left angle bracket), `<` operator (I/O) 53
< (left angle bracket), `<=` operator 86, 91

=

= (equals sign), `=` operator 81
= (equals sign), `==` operator 86, 91

>

> (right angle bracket), `>` operator 86, 91
> (right angle bracket), `>` operator (I/O) 65
> (right angle bracket), `>=` operator 86, 91
> (right angle bracket), `>>` operator (I/O) .. 66, 91

?

? (question mark) 28, 31
? (question mark), `?:` operator 92

[

`[]` (square brackets) 27

^

^ (caret) 27, 31
^ (caret), `^` operator 91, 176
^ (caret), `^=` operator 83, 92, 176
^ (caret), in character lists 29

_

_ (underscore), `_` C macro 157
_ (underscore), in names of private variables .. 182
_ (underscore), translatable string 159
`_gr_init` user-defined function 206
`_pw_init` user-defined function 203

{

{} (braces), actions and 98
{} (braces), `pgawk` program 171
{} (braces), statements, grouping 99

\

\ (backslash) 12, 14, 15, 27
\ (backslash), `\"` escape sequence 26
\ (backslash), `\'` operator (`gawk`) 31
\ (backslash), `\/` escape sequence 26
\ (backslash), `\<` operator (`gawk`) 31
\ (backslash), `\>` operator (`gawk`) 31
\ (backslash), `\`` operator (`gawk`) 31
\ (backslash), `\a` escape sequence 25
\ (backslash), `\b` escape sequence 25
\ (backslash), `\B` operator (`gawk`) 31
\ (backslash), `\f` escape sequence 25
\ (backslash), `\n` escape sequence 25
\ (backslash), *\nnn* escape sequence 25
\ (backslash), `\r` escape sequence 25
\ (backslash), `\t` escape sequence 25
\ (backslash), `\v` escape sequence 25
\ (backslash), `\w` operator (`gawk`) 31
\ (backslash), `\W` operator (`gawk`) 31
\ (backslash), `\x` escape sequence 25

\ (backslash), \y operator (gawk) 31
\ (backslash), as field separators 45
\ (backslash), continuing lines and 21, 219
\ (backslash), continuing lines and, comments and 22
\ (backslash), continuing lines and, in csh .. 20, 21
\ (backslash), gsub/gensub/sub functions and 136
\ (backslash), in character lists 29
\ (backslash), in escape sequences 25, 26
\ (backslash), in escape sequences, POSIX and 26
\ (backslash), regexp constants 34

|

| (vertical bar) 28
| (vertical bar), | operator (I/O) 54, 66, 91
| (vertical bar), |& operator (I/O) .. 55, 66, 91, 166
| (vertical bar), |& operator (I/O), pipes, closing 72
| (vertical bar), |& operator (I/O), two-way communications 169
| (vertical bar), || operator 88, 91

~

~ (tilde), ~ operator 32, 34, 74, 86, 87, 91, 94

A

accessing fields 39
account information 201, 205
actions 98
actions, control statements in 99
actions, default 17
actions, empty 18
adding, features to gawk 279
adding, fields 41
adding, functions to gawk 282
advanced features, buffering 141, 142
advanced features, close function 72
advanced features, constants, values of 74
advanced features, data files as single record ... 38
advanced features, fixed-width data 47
advanced features, FNR/NR variables 113
advanced features, gawk 165
advanced features, gawk, BSD portals 169
advanced features, gawk, network programming 168
advanced features, gawk, nondecimal input data 165
advanced features, gawk, processes, communicating with 166
advanced features, network connections, See Also networks, connections 165
advanced features, null strings, matching 139
advanced features, operators, precedence 84
advanced features, piping into sh 67
advanced features, regexp constants 83
Aho, Alfred 4, 258
alarm clock example program 231
alarm.awk program 231
algorithms 295
Alpha (DEC) 7
amazing awk assembler (aaa) 299
amazingly workable formatter (awf) 299
ambiguity, syntactic: /= operator vs. /=.../ regexp constant 83
amiga 266
ampersand (&), && operator 88
ampersand (&), &&operator 91
ampersand (&), gsub/gensub/sub functions and 136
AND bitwise operation 147
and Boolean-logic operator 88
and function (gawk) 147
ANSI 299
archeologists 276
ARGC/ARGV variables 110, 113
ARGC/ARGV variables, command-line arguments 178
ARGC/ARGV variables, portability and 14
ARGIND variable 110
ARGIND variable, command-line arguments 178
arguments, command-line 110, 113, 178
arguments, command-line, invoking awk 173
arguments, in function calls 90
arguments, processing 196
arguments, retrieving 284
arithmetic operators 79
arrays 116
arrays, as parameters to functions 153
arrays, associative 116
arrays, associative, clearing 283
arrays, associative, library functions and 182
arrays, deleting entire contents 120
arrays, elements, assigning 118
arrays, elements, deleting 120
arrays, elements, installing 283
arrays, elements, order of 120
arrays, elements, referencing 117
arrays, elements, retrieving number of 129
arrays, for statement and 119
arrays, IGNORECASE variable and 117
arrays, indexing 116
arrays, merging into strings 190
arrays, multidimensional 122
arrays, multidimensional, scanning 124
arrays, names of 116
arrays, scanning 119
arrays, sorting 124
arrays, sorting, IGNORECASE variable and 126
arrays, sparse 117
arrays, subscripts 121
arrays, subscripts, uninitialized variables as ... 122

artificial intelligence, `gawk` and 261
ASCII 189
`asort` function (`gawk`) 124, 129
`asort` function (`gawk`), arrays, sorting 124
`asorti` function (`gawk`) 130
`assert` function (C library) 186
`assert` user-defined function 186
assertions 186
assignment operators 81
assignment operators, evaluation order 82
assignment operators, lvalues/rvalues 81
assignments as filenames 196
`assoc_clear` internal function 283
`assoc_lookup` internal function 283
associative arrays 116
asterisk (`*`), `*` operator, as multiplication operator 91
asterisk (`*`), `*` operator, as regexp operator 28
asterisk (`*`), `*` operator, null strings, matching 139
asterisk (`*`), `**` operator 80, 91, 176
asterisk (`*`), `**=` operator 83, 92, 176
asterisk (`*`), `*=` operator 83, 92
`atan2` function 128
atari 274
`awf` (amazingly workable formatter) program .. 299
`awk` language, POSIX version 83
`awk` programs 11, 13, 19
`awk` programs, complex 23
`awk` programs, documenting 14, 181
`awk` programs, examples of 210
`awk` programs, execution of 105
`awk` programs, internationalizing 149, 158
`awk` programs, lengthy 12
`awk` programs, lengthy, assertions 186
`awk` programs, location of 173
`awk` programs, one-line examples 18
`awk` programs, profiling 169
`awk` programs, profiling, enabling 176
`awk` programs, running 11, 12
`awk` programs, running, from shell scripts 11
`awk` programs, running, without input files 12
`awk` programs, shell variables in 97
`awk`, function of 11
`awk`, `gawk` and 3, 5
`awk`, history of 4
`awk`, implementation issues, pipes 67
`awk`, implementations 277
`awk`, implementations, limits 56
`awk`, invoking 173
`awk`, new vs. old 4
`awk`, new vs. old, `OFMT` variable 78
`awk`, POSIX and 3
`awk`, POSIX and, See Also POSIX `awk` 3
`awk`, regexp constants and 87
`awk`, See Also `gawk` 3
`awk`, terms describing 5
`awk`, uses for 3, 11, 22
`awk`, versions of 4, 252
`awk`, versions of, changes between SVR3.1 and SVR4 253
`awk`, versions of, changes between SVR4 and POSIX `awk` 253
`awk`, versions of, changes between V7 and SVR3.1 252
`awk`, versions of, See Also Bell Laboratories `awk` 254
`awk.h` file (internal) 282
`awka` compiler for `awk` 278
`AWKNUM` internal type 283
`AWKPATH` environment variable 178
`AWKPATH` environment variable 270
`awkprof.out` file 169
`awksed.awk` program 243
`awkvars.out` file 175

B

backslash (\) 12, 14, 15, 27
backslash (\), `\"` escape sequence 26
backslash (\), `\'` operator (`gawk`) 31
backslash (\), `\/` escape sequence 26
backslash (\), `\<` operator (`gawk`) 31
backslash (\), `\>` operator (`gawk`) 31
backslash (\), `\`` operator (`gawk`) 31
backslash (\), `\a` escape sequence 25
backslash (\), `\b` escape sequence 25
backslash (\), `\B` operator (`gawk`) 31
backslash (\), `\f` escape sequence 25
backslash (\), `\n` escape sequence 25
backslash (\), *\nnn* escape sequence 25
backslash (\), `\r` escape sequence 25
backslash (\), `\t` escape sequence 25
backslash (\), `\v` escape sequence 25
backslash (\), `\w` operator (`gawk`) 31
backslash (\), `\W` operator (`gawk`) 31
backslash (\), `\x` escape sequence 25
backslash (\), `\y` operator (`gawk`) 31
backslash (\), as field separators 45
backslash (\), continuing lines and 21, 219
backslash (\), continuing lines and, comments and 22
backslash (\), continuing lines and, in `csh` .. 20, 21
backslash (\), `gsub`/`gensub`/`sub` functions and 136
backslash (\), in character lists 29
backslash (\), in escape sequences 25, 26
backslash (\), in escape sequences, POSIX and 26
backslash (\), regexp constants 34
`BBS-list` file 16
Beebe, Nelson 9
Beebe, Nelson H.F. 278
`BEGIN` pattern 36, 43, 96
`BEGIN` pattern, `assert` user-defined function and 187

`BEGIN` pattern, Boolean patterns and 94
`BEGIN` pattern, `exit` statement and 106
`BEGIN` pattern, `getline` and 56
`BEGIN` pattern, headings, adding 58
`BEGIN` pattern, `next`/`nextfile` statements and 97, 105
`BEGIN` pattern, `OFS`/`ORS` variables, assigning values to 59
`BEGIN` pattern, operators and 96
`BEGIN` pattern, `pgawk` program 170
`BEGIN` pattern, `print` statement and 97
`BEGIN` pattern, `pwcat` program 203
`BEGIN` pattern, running `awk` programs and 211
`BEGIN` pattern, `TEXTDOMAIN` variable and 159
`beginfile` user-defined function 193
Bell Laboratories `awk` extensions 254
Benzinger, Michael 259
BeOS 266
Berry, Karl 9
binary input/output 107
`bindtextdomain` function (C library) 157
`bindtextdomain` function (`gawk`) 149, 158
`bindtextdomain` function (`gawk`), portability and 161
`BINMODE` variable 107, 270
`bits2str` user-defined function 148
bitwise, complement 147
bitwise, operations 147
bitwise, shift 147
body, in actions 99
body, in loops 100
Boolean expressions 88
Boolean expressions, as patterns 94
Boolean operators, See Boolean expressions 88
Bourne shell, quoting rules for 15
braces (`{}`), actions and 98
braces (`{}`), `pgawk` program 171
braces (`{}`), statements, grouping 99
bracket expressions, See character lists 27
`break` statement 103
Brennan, Michael 121, 166, 243, 277
Broder, Alan J. 259
Brown, Martin 9, 258, 276
BSD portals 169
BSD-based operating systems 307
Buening, Andreas 9, 259
buffering, input/output 142, 167
buffering, interactive vs. noninteractive 141
buffers, flushing 140, 142
buffers, operators for 31
bug reports, email address, `bug-gawk@gnu.org` 276
`bug-gawk@gnu.org` bug reporting address 276
built-in functions 127
built-in functions, evaluation order 127
built-in variables 107
built-in variables, `-v` option, setting with 174
built-in variables, conveying information 110
built-in variables, user-modifiable 107

C

call by reference 153
call by value 152
caret (`^`) 27, 31
caret (`^`), `^` operator 91, 176
caret (`^`), `^=` operator 83, 92, 176
caret (`^`), in character lists 29
`case` keyword 102
case sensitivity, array indices and 117
case sensitivity, converting case 136
case sensitivity, example programs 181
case sensitivity, `gawk` 32
case sensitivity, regexps and 32, 108
case sensitivity, string comparisons and 108
character encodings 189
character lists 27, 29
character lists, character classes 30
character lists, collating elements 30
character lists, collating symbols 30
character lists, complemented 28
character lists, equivalence classes 30
character lists, non-ASCII 30
character lists, range expressions 29
character sets 189
character sets (machine character encodings) .. 300
character sets, See Also character lists 27
characters, counting 228
characters, transliterating 233
characters, values of as numbers 188
Chassell, Robert J. 9
`chdir` function, implementing in `gawk` 286
`chem` utility 301
`chr` user-defined function 188
Cliff random numbers 188
`cliff_rand` user-defined function 188
`close` function 54, 70, 140
`close` function, return values 72
`close` function, two-way pipes and 167
Close, Diane 8, 258
collating elements 30
collating symbols 30
columns, aligning 58
columns, cutting 210
comma (`,`), in range patterns 95
command line, arguments 110, 113, 178
command line, formats 11
command line, `FS` on, setting 45
command line, invoking `awk` from 173
command line, options 12, 45, 173
command line, options, end of 174
command line, variables, assigning on 76
command-line options, processing 196
command-line options, string extraction 160
commenting 14
commenting, backslash continuation and 22

`comp.lang.awk` newsgroup 276
comparison expressions 85
comparison expressions, as patterns 93
comparison expressions, string vs. regexp 87
compatibility mode (`gawk`), extensions 255
compatibility mode (`gawk`), file names 70
compatibility mode (`gawk`), hexadecimal numbers 74
compatibility mode (`gawk`), octal numbers 74
compatibility mode (`gawk`), specifying 174
compiled programs 294, 301
`compl` function (`gawk`) 147
complement, bitwise 147
compound statements, control statements and .. 99
concatenating 80
conditional expressions 89
configuration option, `--disable-lint` 264
configuration option, `--disable-nls` 265
configuration option, `--enable-portals` 264
configuration option, `--enable-switch` 264
configuration option, `--with-included-gettext` 164, 264
configuration options, `gawk` 264
constants, nondecimal 165
constants, types of 73
`continue` statement 104
control statements 99
converting, case 136
converting, dates to timestamps 143
converting, during subscripting 121
converting, numbers 77
converting, numbers, to strings 148
converting, strings to numbers 77
`CONVFMT` variable 77, 108
`CONVFMT` variable, array subscripts and 121
coprocesses 66, 166
coprocesses, closing 70
coprocesses, `getline` from 55
`cos` function 128
counting 228
`csh` utility 21
`csh` utility, `|&` operator, comparison with 166
`csh` utility, backslash continuation and 20
`csh` utility, `POSIXLY_CORRECT` environment variable 177
`ctime` user-defined function 152
currency symbols, localization 157
`custom.h` file 265
`cut` utility 210
`cut.awk` program 211

D

d.c., See dark corner 7
dark corner 7, 62, 83, 85, 301
dark corner, array subscripts 122
dark corner, `break` statement 104
dark corner, `close` function 72
dark corner, command-line arguments 77
dark corner, `continue` statement 105
dark corner, `CONVFMT` variable 77
dark corner, escape sequences 178
dark corner, escape sequences, for metacharacters 27
dark corner, `exit` statement 107
dark corner, field separators 47
dark corner, `FILENAME` variable 56, 111
dark corner, `FNR`/`NR` variables 113
dark corner, format-control characters 61
dark corner, `FS` as null string 45
dark corner, input files 37
dark corner, invoking `awk` 173
dark corner, multiline records 49
dark corner, `NF` variable, decrementing 42
dark corner, `OFMT` variable 60
dark corner, regexp constants 74
dark corner, regexp constants, `/=` operator and 83
dark corner, regexp constants, as arguments to user-defined functions 75
dark corner, `split` function 132
dark corner, strings, storing 39
data, fixed-width 47
data-driven languages 295
database, group, reading 205
database, users, reading 201
`date` utility, GNU 142
`date` utility, POSIX 146
dates, converting to timestamps 143
dates, information related to, localization 158
Davies, Stephen 258, 277
`dcgettext` function (`gawk`) 149, 158
`dcgettext` function (`gawk`), portability and ... 161
`dcngettext` function (`gawk`) 149, 158
`dcngettext` function (`gawk`), portability and .. 161
deadlocks 167
debugging `gawk` 180
debugging `gawk`, bug reports 276
decrement operators 84
`default` keyword 102
Deifik, Scott 9, 258, 276
`delete` statement 120
deleting elements in arrays 120
deleting entire arrays 120
differences in `awk` and `gawk`, `ARGC`/`ARGV` variables 114
differences in `awk` and `gawk`, `ARGIND` variable .. 110
differences in `awk` and `gawk`, array elements, deleting 120
differences in `awk` and `gawk`, `AWKPATH` environment variable 178
differences in `awk` and `gawk`, `BEGIN`/`END` patterns 97
differences in `awk` and `gawk`, `BINMODE` variable 108, 270

differences in `awk` and `gawk`, `close` function ... 71, 72
differences in `awk` and `gawk`, `ERRNO` variable ... 111
differences in `awk` and `gawk`, error messages 68
differences in `awk` and `gawk`, `FIELDWIDTHS` variable ... 108
differences in `awk` and `gawk`, function arguments (`gawk`) ... 127
differences in `awk` and `gawk`, `getline` command ... 51
differences in `awk` and `gawk`, `IGNORECASE` variable ... 108
differences in `awk` and `gawk`, implementation limitations ... 56, 67
differences in `awk` and `gawk`, input/output operators ... 55, 66
differences in `awk` and `gawk`, line continuations .. 89
differences in `awk` and `gawk`, `LINT` variable 109
differences in `awk` and `gawk`, `match` function ... 131
differences in `awk` and `gawk`, `next`/`nextfile` statements ... 106
differences in `awk` and `gawk`, `print`/`printf` statements ... 62
differences in `awk` and `gawk`, `PROCINFO` array ... 112
differences in `awk` and `gawk`, record separators .. 38
differences in `awk` and `gawk`, regexp constants .. 75
differences in `awk` and `gawk`, regular expressions ... 32
differences in `awk` and `gawk`, `RS`/`RT` variables 38
differences in `awk` and `gawk`, `RT` variable 113
differences in `awk` and `gawk`, single-character fields ... 44
differences in `awk` and `gawk`, `split` function ... 132
differences in `awk` and `gawk`, strings ... 73
differences in `awk` and `gawk`, strings, storing 39
differences in `awk` and `gawk`, `strtonum` function (`gawk`) ... 133
differences in `awk` and `gawk`, `TEXTDOMAIN` variable ... 110
differences in `awk` and `gawk`, trunc-mod operation ... 79
directories, changing ... 286
directories, searching ... 178, 250
division ... 79
`do-while` statement ... 24, 101
documentation, of `awk` programs ... 181
documentation, online ... 7
documents, searching ... 230
dollar sign (`$`) ... 27
dollar sign (`$`), `$` field operator ... 39, 91
dollar sign (`$`), incrementing fields and arrays .. 84
double quote (`"`) ... 12, 15
double quote (`"`), regexp constants ... 34
double-precision floating-point ... 295
Drepper, Ulrich ... 9
`dupnode` internal function ... 284
`dupword.awk` program ... 231

E

EBCDIC ... 189
`egrep` utility ... 29, 215
`egrep.awk` program ... 216
elements in arrays ... 117
elements in arrays, assigning ... 118
elements in arrays, deleting ... 120
elements in arrays, order of ... 120
elements in arrays, scanning ... 119
email address for bug reports, `bug-gawk@gnu.org` ... 276
`EMISTERED` ... 168
empty pattern ... 97
empty strings, See null strings ... 44
`END` pattern ... 96
`END` pattern, `assert` user-defined function and ... 187
`END` pattern, backslash continuation and ... 219
`END` pattern, Boolean patterns and ... 94
`END` pattern, `exit` statement and ... 106
`END` pattern, `next`/`nextfile` statements and ... 97, 105
`END` pattern, operators and ... 96
`END` pattern, `pgawk` program ... 170
`END` pattern, `print` statement and ... 97
`endfile` user-defined function ... 193
`endgrent` function (C library) ... 209
`endgrent` user-defined function ... 209
`endpwent` function (C library) ... 205
`endpwent` user-defined function ... 205
`ENVIRON` variable ... 111
environment variables ... 111
epoch, definition of ... 302
equals sign (`=`), `=` operator ... 81
equals sign (`=`), `==` operator ... 86, 91
EREs (Extended Regular Expressions) ... 29
`ERRNO` variable ... 51, 111, 285
error handling ... 68
error handling, `ERRNO` variable and ... 111
error output ... 68
escape processing, `gsub`/`gensub`/`sub` functions ... 136
escape sequences ... 25
escape sequences, unrecognized ... 176
evaluation order ... 84
evaluation order, concatenation ... 80
evaluation order, functions ... 127
examining fields ... 39
exclamation point (`!`), `!` operator ... 88, 91, 218
exclamation point (`!`), `!=` operator ... 86, 91
exclamation point (`!`), `!~` operator .. 24, 32, 34, 74, 86, 87, 91, 94
`exit` statement ... 106
`exp` function ... 128
`expand` utility ... 18
expressions ... 73
expressions, as patterns ... 93
expressions, assignment ... 81

expressions, Boolean 88
expressions, comparison 85
expressions, conditional 89
expressions, matching, See comparison expressions 85
expressions, selecting 89
Extended Regular Expressions (EREs) 29
`extension` function (`gawk`) 290
extensions, Bell Laboratories `awk` 254
extensions, in `gawk`, not in POSIX `awk` 255
extensions, `mawk` 277
`extract.awk` program 241
extraction, of marked strings (internationalization) 160

F

false, logical 85
FDL (Free Documentation License) 315
features, adding to `gawk` 279
features, advanced, See advanced features 179
features, deprecated 179
features, undocumented 180
Fenlason, Jay 4, 258
`fflush` function 140
`fflush` function, unsupported 176
field numbers 40
field operator `$` 39
field operators, dollar sign as 39
field separators 43, 108, 109
field separators, choice of 43
field separators, `FIELDWIDTHS` variable and 108
field separators, in multiline records 49
field separators, on command line 45
field separators, POSIX and 39, 46
field separators, regular expressions as 43, 44
field separators, See Also `OFS` 41
field separators, spaces as 212
fields 36, 39, 295
fields, adding 41
fields, changing contents of 41
fields, cutting 210
fields, examining 39
fields, number of 39
fields, numbers 40
fields, printing 58
fields, separating 43
fields, single-character 44
`FIELDWIDTHS` variable 47, 108
file descriptors 68
file names, distinguishing 111
file names, in compatibility mode 70
file names, standard streams in `gawk` 68
`FILENAME` variable 36, 111
`FILENAME` variable, `getline`, setting with 56
filenames, assignments as 196
files, `.mo` 157
files, `.mo`, converting from `.po` 163
files, `.mo`, specifying directory of 157, 158
files, `.po` 156, 159
files, `.po`, converting to `.mo` 163
files, `/dev/...` special files 68
files, `/inet/` (`gawk`) 168
files, `/p` (`gawk`) 169
files, as single records 39
files, `awk` programs in 12
files, `awkprof.out` 169
files, `awkvars.out` 175
files, closing 140
files, descriptors, See file descriptors 68
files, for process information 69
files, group 205
files, information about, retrieving 286
files, initialization and cleanup 192
files, input, See input files 12
files, log, timestamps in 142
files, managing 192
files, managing, data file boundaries 192
files, message object 157
files, message object, converting from portable object files 163
files, message object, specifying directory of 157, 158
files, multiple passes over 178
files, multiple, duplicating output into 223
files, output, See output files 70
files, password 201
files, portable object 156, 159
files, portable object, converting to message object files 163
files, portable object, generating 175
files, portal 169
files, processing, `ARGIND` variable and 110
files, reading 194
files, reading, multiline records 49
files, searching for regular expressions 215
files, skipping 194
files, source, search path for 250
files, splitting 221
files, Texinfo, extracting programs from 240
Fish, Fred 258, 276
fixed-width data 47
flag variables 88, 223
floating-point 297
floating-point, numbers 295
floating-point, numbers, `AWKNUM` internal type 283
`FNR` variable 36, 111
`FNR` variable, changing 113
`for` statement 101
`for` statement, in arrays 119
`force_number` internal function 283
`force_string` internal function 283
format specifiers, mixing regular with positional specifiers 161
format specifiers, `printf` statement 60

format specifiers, `strftime` function (`gawk`) ... 144
format strings ... 60
formats, numeric output ... 59
formatting output ... 60
forward slash (`/`) ... 24
forward slash (`/`), `/` operator ... 91
forward slash (`/`), `/=` operator ... 83, 92
forward slash (`/`), `/=` operator, vs. `/=.../` regexp constant ... 83
forward slash (`/`), patterns and ... 94
Free Documentation License (FDL) ... 315
Free Software Foundation (FSF) ... 7, 260, 303
`free_temp` internal macro ... 284
FreeBSD ... 307
`FS` variable ... 43, 108
`FS` variable, `--field-separator` option and ... 173
FS variable, as null string ... 45
`FS` variable, as TAB character ... 176
`FS` variable, changing value of ... 43, 180
`FS` variable, running `awk` programs and ... 211
`FS` variable, setting from command line ... 45
FSF (Free Software Foundation) ... 7, 260, 303
function calls ... 89
functions, arrays as parameters to ... 153
functions, built-in ... 89, 127
functions, built-in, adding to `gawk` ... 282
functions, built-in, evaluation order ... 127
functions, defining ... 149
functions, library ... 181
functions, library, assertions ... 186
functions, library, associative arrays and ... 182
functions, library, C library ... 196
functions, library, character values as numbers ... 188
functions, library, Cliff random numbers ... 188
functions, library, command-line options ... 196
functions, library, example program for using ... 244
functions, library, group database, reading ... 205
functions, library, managing data files ... 192
functions, library, managing time ... 190
functions, library, merging arrays into strings ... 190
functions, library, `nextfile` statement ... 183
functions, library, rounding numbers ... 187
functions, library, user database, reading ... 201
functions, names of ... 116, 150
functions, recursive ... 150
functions, return values, setting ... 285
functions, string-translation ... 149
functions, undefined ... 153
functions, user-defined ... 149
functions, user-defined, calling ... 152
functions, user-defined, counts ... 171
functions, user-defined, library of ... 181
functions, user-defined, `next`/`nextfile` statements and ... 105, 106

G

G-d ... 9
Garfinkle, Scott ... 258
`gawk`, `awk` and ... 3, 5
`gawk`, bitwise operations in ... 147
`gawk`, `break` statement in ... 104
`gawk`, built-in variables and ... 107
`gawk`, character classes and ... 31
`gawk`, coding style in ... 279
`gawk`, command-line options ... 32
`gawk`, comparison operators and ... 87
`gawk`, configuring ... 265
`gawk`, configuring, options ... 264
`gawk`, `continue` statement in ... 105
`gawk`, debugging ... 180
`gawk`, distribution ... 261
`gawk`, escape sequences ... 26
`gawk`, extensions, disabling ... 176
`gawk`, features, adding ... 279
`gawk`, features, advanced ... 165
`gawk`, `fflush` function in ... 140
`gawk`, field separators and ... 108
`gawk`, `FIELDWIDTHS` variable in ... 108
`gawk`, file names in ... 67
`gawk`, format-control characters ... 61
`gawk`, function arguments and ... 127
`gawk`, functions, adding ... 282
`gawk`, hexadecimal numbers and ... 74
`gawk`, `IGNORECASE` variable in ... 109
`gawk`, implementation issues ... 279
`gawk`, implementation issues, debugging ... 279
`gawk`, implementation issues, downward compatibility ... 279
`gawk`, implementation issues, limits ... 56
`gawk`, implementation issues, pipes ... 67
`gawk`, installing ... 260
`gawk`, internals ... 282
`gawk`, internationalization and, See internationalization ... 156
`gawk`, interpreter, adding code to ... 290, 293
`gawk`, interval expressions and ... 29
`gawk`, line continuation in ... 89
`gawk`, `LINT` variable in ... 109
`gawk`, list of contributors to ... 258
`gawk`, MS-DOS version of ... 270
`gawk`, newlines in ... 21
`gawk`, `next file` statement in ... 106
`gawk`, `nextfile` statement in ... 106, 183
`gawk`, octal numbers and ... 74
`gawk`, OS/2 version of ... 270
`gawk`, regexp constants and ... 75
`gawk`, regular expressions, case sensitivity ... 32
`gawk`, regular expressions, operators ... 31
`gawk`, regular expressions, precedence ... 29
`gawk`, See Also `awk` ... 3
`gawk`, source code, obtaining ... 260
`gawk`, splitting fields and ... 48
`gawk`, string-translation functions ... 149

`gawk`, timestamps 142
`gawk`, uses for 3
`gawk`, versions of, information about, printing 177
`gawk`, word-boundary operator 31
General Public License (GPL) 303
General Public License, See GPL 7
`gensub` function (`gawk`) 75, 135
`gensub` function (`gawk`), escape processing 136
`get_actual_argument` internal function 284
`get_argument` internal function 284
`get_array_argument` internal macro 284
`get_curfunc_arg_count` internal function 283
`get_scalar_argument` internal macro 284
`getgrent` function (C library) 205, 209
`getgrent` user-defined function 205, 209
`getgrgid` function (C library) 208
`getgrgid` user-defined function 208
`getgrnam` function (C library) 208
`getgrnam` user-defined function 208
`getgruser` function (C library) 209
`getgruser` function, user-defined 209
`getline` command 36
`getline` command, `_gr_init` user-defined function 206
`getline` command, `_pw_init` function 204
`getline` command, coprocesses, using from 55, 70
`getline` command, deadlock and 167
`getline` command, explicit input with 51
`getline` command, `FILENAME` variable and 56
`getline` command, return values 51
`getline` command, variants 56
`getopt` function (C library) 196
`getopt` user-defined function 198
`getpwent` function (C library) 201, 204
`getpwent` user-defined function 201, 204
`getpwnam` function (C library) 204
`getpwnam` user-defined function 204
`getpwuid` function (C library) 204
`getpwuid` user-defined function 204
`getservbyname` function (C library) 168
`gettext` function (C library) 157
`gettext` library 156
`gettext` library, locale categories 157
`gettimeofday` user-defined function 191
GNITS mailing list 9
GNU `awk`, See `gawk` 3
GNU Free Documentation License 315
GNU General Public License 303
GNU Lesser General Public License 304
GNU long options 173
GNU long options, printing list of 175
GNU Project 7, 303
GNU/Linux 7, 163, 264, 274, 307
GPL (General Public License) 7, 303
GPL (General Public License), printing 174
`grcat` program 205
Grigera, Juan 258, 277
group database, reading 205
group file 205
groups, information about 205
`gsub` function 75, 134
`gsub` function, arguments of 134
`gsub` function, escape processing 136

H

Hankerson, Darrel 9, 258, 276
Hartholz, Elaine 9
Hartholz, Marshall 9
Hasegawa, Isamu 9, 259
hexadecimal numbers 73
hexadecimal values, enabling interpretation of 175
`histsort.awk` program 239
Hughes, Phil 9
`HUP` signal 172
hyphen (`-`), `-` operator 91
hyphen (`-`), `--` (decrement/increment) operators 91
hyphen (`-`), `--` operator 84
hyphen (`-`), `-=` operator 83, 92
hyphen (`-`), filenames beginning with 174
hyphen (`-`), in character lists 29

I

`id` utility 219
`id.awk` program 219
`if` statement 24, 99
`if` statement, actions, changing 95
`igawk.sh` program 246
`IGNORECASE` variable 32, 108
`IGNORECASE` variable, array sorting and 126
`IGNORECASE` variable, array subscripts and 117
`IGNORECASE` variable, in example programs 181
implementation issues, `gawk` 279
implementation issues, `gawk`, limits 56
implementation issues, `gawk`, debugging 279
implementation issues, `gawk`, limits 67
`in` operator 86, 91, 220
`in` operator, arrays and 117, 119
increment operators 83
`index` function 130
indexing arrays 116
initialization, automatic 20
input files 36
input files, closing 70
input files, counting elements in 228
input files, examples 16
input files, reading 36
input files, running `awk` without 12
input files, skipping 183
input files, variable assignments and 178
input pipeline 54

input redirection 53
input, data, nondecimal 165
input, explicit 51
input, files, See input files 49
input, multiline records 49
input, splitting into records 36
input, standard 12, 68
input/output, binary 107
input/output, from `BEGIN` and `END` 97
input/output, two-way 166
insomnia, cure for 231
installation, amiga 266
installation, atari 274
installation, beos 266
installation, tandem 275
installation, vms 271
installing `gawk` 260
`int` function 128
`INT` signal (MS-DOS) 172
integers 295
integers, unsigned 295
interacting with other programs 141
internationalization 149, 156
internationalization, localization 110, 156
internationalization, localization, character classes 31
internationalization, localization, `gawk` and 156
internationalization, localization, locale categories 157
internationalization, localization, marked strings 158
internationalization, localization, portability and 161
internationalizing a program 156
interpreted programs 294, 304
interval expressions 28
`inventory-shipped` file 16
ISO 304
ISO 8859-1 300
ISO Latin-1 300

J

Jacobs, Andrew 202
Jaegermann, Michal 9, 258
Jedi knights 180
`join` user-defined function 190

K

Kahrs, Jürgen 9, 258
Kenobi, Obi-Wan 180
Kernighan, Brian ... 4, 7, 9, 80, 254, 258, 277, 296
`kill` command, dynamic profiling 172
Knights, jedi 180
Kwok, Conrad 258

L

`labels.awk` program 236
languages, data-driven 295
`LC_ALL` locale category 158
`LC_COLLATE` locale category 157
`LC_CTYPE` locale category 157
`LC_MESSAGES` locale category 157
`LC_MESSAGES` locale category, `bindtextdomain` function (`gawk`) 159
`LC_MONETARY` locale category 157
`LC_NUMERIC` locale category 157
`LC_RESPONSE` locale category 158
`LC_TIME` locale category 158
left angle bracket (`<`), `<` operator 86, 91
left angle bracket (`<`), `<` operator (I/O) 53
left angle bracket (`<`), `<=` operator 86, 91
left shift, bitwise 147
leftmost longest match 49
`length` function 130
Lesser General Public License (LGPL) 304
LGPL (Lesser General Public License) 304
libraries of `awk` functions 181
libraries of `awk` functions, assertions 186
libraries of `awk` functions, associative arrays and 182
libraries of `awk` functions, character values as numbers 188
libraries of `awk` functions, command-line options 196
libraries of `awk` functions, example program for using 244
libraries of `awk` functions, group database, reading 205
libraries of `awk` functions, managing, data files 192
libraries of `awk` functions, managing, time 190
libraries of `awk` functions, merging arrays into strings 190
libraries of `awk` functions, `nextfile` statement 183
libraries of `awk` functions, rounding numbers .. 187
libraries of `awk` functions, user database, reading 201
line breaks 20
line continuations 88
line continuations, `gawk` 89
line continuations, in `print` statement 58
line continuations, with C shell 20
lines, blank, printing 57
lines, counting 228
lines, duplicate, removing 239
lines, matching ranges of 95
lines, skipping between markers 95
lint checking 109
lint checking, array elements 120
lint checking, array subscripts 122
lint checking, empty programs 173
lint checking, issuing warnings 175

lint checking, `POSIXLY_CORRECT` environment variable ... 177
lint checking, undefined functions ... 153
`LINT` variable ... 109
Linux ... 7, 163, 264, 274, 307
locale categories ... 157
localization ... 156
localization, See internationalization, localization ... 156
log files, timestamps in ... 142
`log` function ... 128
logical false/true ... 85
logical operators, See Boolean expressions ... 88
login information ... 201
long options ... 173
loops ... 100
loops, `continue` statements and ... 102
loops, count for header ... 171
loops, exiting ... 103
loops, See Also `while` statement ... 100
Lost In Space ... 282
`ls` utility ... 20
`lshift` function (`gawk`) ... 148
lvalues/rvalues ... 81

M

mailing labels, printing ... 235
mailing list, GNITS ... 9
`make_builtin` internal function ... 284
`make_number` internal function ... 283
`make_string` internal function ... 283
mark parity ... 189
marked string extraction (internationalization) ... 160
marked strings, extracting ... 160
Marx, Groucho ... 84
`match` function ... 130
`match` function, `RSTART`/`RLENGTH` variables ... 131
matching, expressions, See comparison expressions ... 85
matching, leftmost longest ... 49
matching, null strings ... 139
`mawk` program ... 277
McPhee, Patrick ... 259
memory, releasing ... 284
memory, setting limits ... 174
message object files ... 157
message object files, converting from portable object files ... 163
message object files, specifying directory of ... 157, 158
metacharacters, escape sequences for ... 27
`mktime` function (`gawk`) ... 143
modifiers, in format specifiers ... 61
monetary information, localization ... 157
`msgfmt` utility ... 163

N

names, arrays/variables ... 116, 181
names, functions ... 150, 181
namespace issues ... 116, 181
namespace issues, functions ... 150
`nawk` utility ... 4
negative zero ... 298
NetBSD ... 307
networks, programming ... 168
networks, support for ... 69
newlines ... 20, 88, 176
newlines, as field separators ... 43
newlines, as record separators ... 36
newlines, in dynamic regexps ... 34
newlines, in regexp constants ... 34
newlines, printing ... 57
newlines, separating statements in actions ... 98, 99
`next file` statement ... 257
`next file` statement, deprecated ... 179
`next file` statement, in `gawk` ... 106
`next` statement ... 89, 105
`next` statement, `BEGIN`/`END` patterns and ... 97
`next` statement, user-defined functions and ... 105
`nextfile` statement ... 106
`nextfile` statement, `BEGIN`/`END` patterns and ... 97
`nextfile` statement, implementing ... 183
`nextfile` statement, in `gawk` ... 106
`nextfile` statement, `next file` statement and ... 179
`nextfile` statement, user-defined functions and ... 106
`nextfile` user-defined function ... 183
`NF` variable ... 39, 111
`NF` variable, decrementing ... 42
`noassign.awk` program ... 196
`NODE` internal type ... 283
nodes, duplicating ... 284
not Boolean-logic operator ... 88
`NR` variable ... 36, 112
`NR` variable, changing ... 113
null strings ... 37, 44, 85, 296
null strings, array elements and ... 120
null strings, as array subscripts ... 122
null strings, converting numbers to strings ... 77
null strings, matching ... 139
null strings, quoting and ... 15
number sign (`#`), `#!` (executable scripts) ... 13
number sign (`#`), `#!` (executable scripts), portability issues with ... 13
number sign (`#`), commenting ... 14
numbers ... 283
numbers, as array subscripts ... 121
numbers, as values of characters ... 188
numbers, Cliff random ... 188
numbers, converting ... 77
numbers, converting, to strings ... 108, 109, 148
numbers, floating-point ... 295

numbers, floating-point, `AWKNUM` internal type 283
numbers, hexadecimal 73
numbers, `NODE` internal type 283
numbers, octal 73
numbers, random 128
numbers, rounding 187
numeric, constants 73
numeric, output format 59
numeric, strings 85
numeric, values 283

O

`oawk` utility 4
obsolete features 179
octal numbers 73
octal values, enabling interpretation of 175
`OFMT` variable 59, 78, 109
`OFMT` variable, POSIX `awk` and 60
`OFS` variable 41, 59, 109
OpenBSD 307
operating systems, BSD-based 7, 169
operating systems, PC, `gawk` on 270
operating systems, PC, `gawk` on, installing 267
operating systems, porting `gawk` to 281
operating systems, See Also GNU/Linux, PC operating systems, Unix 260
operations, bitwise 147
operators, arithmetic 79
operators, assignment 81
operators, assignment, evaluation order 82
operators, Boolean, See Boolean expressions ... 88
operators, decrement/increment 83
operators, GNU-specific 31
operators, input/output 53, 54, 55, 65, 66, 91
operators, logical, See Boolean expressions 88
operators, precedence 84, 90
operators, relational, See operators, comparison 85
operators, short-circuit 88
operators, string 80
operators, string-matching 24
operators, string-matching, for buffers 31
operators, word-boundary (`gawk`) 31
options, command-line 12, 45, 173
options, command-line, end of 174
options, command-line, invoking `awk` 173
options, command-line, processing 196
options, deprecated 179
options, long 173
options, printing list of 175
OR bitwise operation 147
or Boolean-logic operator 88
`or` function (`gawk`) 147
`ord` user-defined function 188
order of evaluation, concatenation 80
`ORS` variable 59, 109
output field separator, See `OFS` variable 41
output record separator, See `ORS` variable 59
output redirection 65
output, buffering 140, 142
output, duplicating into files 223
output, files, closing 70
output, format specifier, `OFMT` 59
output, formatted 60
output, pipes 66
output, printing, See printing 57
output, records 59
output, standard 68

P

P1003.2 POSIX standard 305
`param_cnt` internal variable 283
parameters, number of 283
parentheses `()` 28
parentheses `()`, `pgawk` program 171
password file 201
patterns 93
patterns, comparison expressions as 93
patterns, counts 171
patterns, default 17
patterns, empty 97
patterns, expressions as 93
patterns, ranges in 95
patterns, regexp constants as 94
patterns, types of 93
`pawk` profiling Bell Labs `awk` 278
PC operating systems, `gawk` on 270
PC operating systems, `gawk` on, installing 267
percent sign (`%`), `%` operator 91
percent sign (`%`), `%=` operator 83, 92
period (`.`) 27
PERL 291
Peters, Arno 259
Peterson, Hal 258
`pgawk` program 169
`pgawk` program, `awkprof.out` file 169
`pgawk` program, dynamic profiling 172
pipes, closing 70
pipes, input 54
pipes, output 66
plus sign (`+`) 28
plus sign (`+`), `+` operator 91
plus sign (`+`), `++` operator 84, 91
plus sign (`+`), `+=` operator 82, 92
plus sign (`+`), decrement/increment operators .. 83
portability 26
portability, `#!` (executable scripts) 13
portability, `**` operator and 80
portability, `**=` operator and 83
portability, `ARGV` variable 14
portability, backslash continuation and 21
portability, backslash in escape sequences 26
portability, `close` function and 71

portability, data files as single record 38
portability, deleting array elements 121
portability, example programs 181
portability, `fflush` function and 140
portability, functions, defining 151
portability, `gawk` 281
portability, `gettext` library and 156
portability, internationalization and 161
portability, `length` function 130
portability, new `awk` vs. old `awk` 78
portability, `next` statement in user-defined functions 153
portability, `NF` variable, decrementing 42
portability, operators 84
portability, operators, not in POSIX `awk` 92
portability, `POSIXLY_CORRECT` environment variable 177
portability, `substr` function 136
portable object files 156, 159
portable object files, converting to message object files 163
portable object files, generating 175
portal files 169
porting `gawk` 281
positional specifiers, `printf` statement 62
positional specifiers, `printf` statement 160
positional specifiers, `printf` statement, mixing with regular formats 161
positive zero 298
POSIX `awk` 5, 83
POSIX `awk`, `**=` operator and 83
POSIX `awk`, `<` operator and 53
POSIX `awk`, `|` I/O operator and 55
POSIX `awk`, arithmetic operators and 79
POSIX `awk`, backslashes in string constants 26
POSIX `awk`, `BEGIN/END` patterns 97
POSIX `awk`, `break` statement and 104
POSIX `awk`, changes in `awk` versions 253
POSIX `awk`, character lists and 29
POSIX `awk`, character lists and, character classes 30, 31
POSIX `awk`, `continue` statement and 105
POSIX `awk`, `CONVFMT` variable and 108
POSIX `awk`, `date` utility and 146
POSIX `awk`, field separators and 39, 46
POSIX `awk`, `FS` variable and 108
POSIX `awk`, `function` keyword in 150
POSIX `awk`, functions and, `gsub/sub` 137
POSIX `awk`, functions and, `length` 130
POSIX `awk`, GNU long options and 173
POSIX `awk`, interval expressions in 29
POSIX `awk`, `next/nextfile` statements and .. 105
POSIX `awk`, numeric strings and 85
POSIX `awk`, `OFMT` variable and 60, 78
POSIX `awk`, period (`.`), using 27
POSIX `awk`, `printf` format strings and 64
POSIX `awk`, regular expressions and 29
POSIX `awk`, timestamps and 142
POSIX mode 176, 177
POSIX, `awk` and 3
POSIX, `gawk` extensions not included in 255
POSIX, programs, implementing in `awk` 210
`POSIXLY_CORRECT` environment variable 177
precedence 84, 90
precedence, regexp operators 29
`print` statement 57
`print` statement, `BEGIN/END` patterns and 97
`print` statement, commas, omitting 58
`print` statement, I/O operators in 91
`print` statement, line continuations and 58
`print` statement, `OFMT` variable and 109
`print` statement, See Also redirection, of output 65
`print` statement, `sprintf` function and 187
`printf` statement 57, 60
`printf` statement, columns, aligning 58
`printf` statement, format-control characters ... 60
`printf` statement, I/O operators in 91
`printf` statement, modifiers 61
`printf` statement, positional specifiers 62, 160
`printf` statement, positional specifiers, mixing with regular formats 161
`printf` statement, See Also redirection, of output 65
`printf` statement, `sprintf` function and 187
`printf` statement, syntax of 60
printing 57
printing, list of options 175
printing, mailing labels 235
printing, unduplicated lines of text 224
printing, user information 219
private variables 181
process information, files for 69
processes, two-way communications with 166
processing data 294
`PROCINFO` array 70, 112, 201, 205
profiling `awk` programs 169
profiling `awk` programs, dynamically 172
profiling `gawk`, See `pgawk` program 169
program, definition of 11
programmers, attractiveness of 166
programming conventions, `--non-decimal-data` option 165
programming conventions, `ARGC/ARGV` variables 110
programming conventions, `exit` statement 107
programming conventions, function parameters 154
programming conventions, functions, calling .. 127
programming conventions, functions, writing .. 150
programming conventions, `gawk` internals 288, 290
programming conventions, `nextfile` statement 183
programming conventions, private variable names 182

programming language, recipe for 3
programming languages, data-driven vs. procedural 11
programming, basic steps 294
programming, concepts 294
`pwcat` program 201

Q

question mark (`?`) 28, 31
question mark (`?`), `?:` operator 92
`QUIT` signal (MS-DOS) 172
quoting 12, 13, 14
quoting, rules for 14
quoting, tricks for 15

R

Rakitzis, Byron 239
`rand` function 128
random numbers, Cliff 188
random numbers, `rand`/`srand` functions 128
random numbers, seed of 128
range expressions 29
range patterns 95
Rankin, Pat 9, 82, 258, 277
raw sockets 168
readable data files, checking 194
`readable.awk` program 194
recipe for a programming language 3
record separators 36, 109
record separators, changing 37
record separators, regular expressions as 38
record separators, with multiline records 49
records 36, 295
records, multiline 49
records, printing 57
records, splitting input into 36
records, terminating 38
records, treating files as 39
recursive functions 150
redirection of input 53
redirection of output 65
reference counting, sorting arrays 125
regexp constants 25, 74, 87
regexp constants, `/=.../`, `/=` operator and 83
regexp constants, as patterns 94
regexp constants, in `gawk` 75
regexp constants, slashes vs. quotes 34
regexp constants, vs. string constants 34
regexp, See regular expressions 24
regular expressions 24
regular expressions as field separators 43
regular expressions, anchors in 27
regular expressions, as field separators 44
regular expressions, as patterns 24, 93
regular expressions, as record separators 38
regular expressions, case sensitivity 32, 108
regular expressions, computed 34
regular expressions, constants, See regexp constants 25
regular expressions, dynamic 34
regular expressions, dynamic, with embedded newlines 34
regular expressions, `gawk`, command-line options 32
regular expressions, interval expressions and .. 176
regular expressions, leftmost longest match 33
regular expressions, operators 24, 27
regular expressions, operators, for buffers 31
regular expressions, operators, for words 31
regular expressions, operators, `gawk` 31
regular expressions, operators, precedence of ... 29
regular expressions, searching for 215
relational operators, See comparison operators .. 85
`return` statement, user-defined functions 154
return values, `close` function 72
`rev` user-defined function 151
`rewind` user-defined function 194
right angle bracket (`>`), `>` operator 86, 91
right angle bracket (`>`), `>` operator (I/O) 65
right angle bracket (`>`), `>=` operator 86, 91
right angle bracket (`>`), `>>` operator (I/O) .. 66, 91
right shift, bitwise 147
Ritchie, Dennis 296
`RLENGTH` variable 112
`RLENGTH` variable, `match` function and 131
Robbins, Arnold ... 46, 54, 202, 231, 259, 276, 291
Robbins, Bill 54
Robbins, Harry 9
Robbins, Jean 9
Robbins, Miriam 9, 54, 202
Robinson, Will 282
robot, the 282
Rommel, Kai Uwe 9, 258
`round` user-defined function 187
rounding 187
rounding numbers 187
`RS` variable 36, 109
`RS` variable, multiline records and 49
`rshift` function (`gawk`) 148
`RSTART` variable 112
`RSTART` variable, `match` function and 131
`RT` variable 38, 51, 113
Rubin, Paul 4, 258
rule, definition of 11
rvalues/lvalues 81

S

scalar values ... 295
Schreiber, Bert ... 9
Schreiber, Rita ... 9
search paths ... 270, 273
search paths, for source files ... 178, 250, 273
searching ... 130
searching, files for regular expressions ... 215
searching, for words ... 230
`sed` utility ... 47, 243, 299
semicolon (`;`) ... 22
semicolon (`;`), `AWKPATH` variable and ... 270
semicolon (`;`), separating statements in actions ... 98, 99
separators, field ... 108, 109
separators, field, `FIELDWIDTHS` variable and ... 108
separators, field, POSIX and ... 39
separators, for records ... 36, 37
separators, for records, regular expressions as ... 38
separators, for statements in actions ... 98
separators, record ... 109
separators, subscript ... 109
`set_value` internal function ... 285
shells, piping commands into ... 67
shells, quoting ... 97
shells, quoting, rules for ... 15
shells, scripts ... 11
shells, variables ... 97
shift, bitwise ... 147
short-circuit operators ... 88
side effects ... 80, 83, 84
side effects, array indexing ... 118
side effects, `asort` function ... 124
side effects, assignment expressions ... 81
side effects, Boolean operators ... 88
side effects, conditional expressions ... 89
side effects, decrement/increment operators ... 83
side effects, `FILENAME` variable ... 56
side effects, function calls ... 90
side effects, statements ... 99
signals, `HUP`/`SIGHUP` ... 172
signals, `INT`/`SIGINT` (MS-DOS) ... 172
signals, `QUIT`/`SIGQUIT` (MS-DOS) ... 172
signals, `USR1`/`SIGUSR1` ... 172
`sin` function ... 128
single quote (') ... 11, 13, 15
single quote ('), vs. apostrophe ... 14
single quote ('), with double quotes ... 15
single-character fields ... 44
single-precision floating-point ... 295
Skywalker, Luke ... 180
`sleep` utility ... 233
sockets ... 168
sort function, arrays, sorting ... 124
`sort` utility ... 238
`sort` utility, coprocesses and ... 167
sorting characters in different languages ... 157
source code, `awka` ... 278
source code, Bell Laboratories `awk` ... 277
source code, `gawk` ... 260
source code, `mawk` ... 277
source code, mixing ... 176
source files, search path for ... 250
sparse arrays ... 117
Spencer, Henry ... 299
`split` function ... 132
`split` function, array elements, deleting ... 121
`split` utility ... 221
`split.awk` program ... 221
`sprintf` function ... 59, 133
`sprintf` function, `OFMT` variable and ... 109
`sprintf` function, `print`/`printf` statements and ... 187
`sqrt` function ... 128
square brackets ([]) ... 27
`srand` function ... 129
Stallman, Richard ... 7, 9, 258, 303
standard input ... 12, 68
standard output ... 68
`stat` function, implementing in `gawk` ... 286
statements, compound, control statements and ... 99
statements, control, in actions ... 99
statements, multiple ... 22
`stlen` internal variable ... 283
`stptr` internal variable ... 283
stream editors ... 47, 243
`strftime` function (`gawk`) ... 143
string constants ... 73
string constants, vs. regexp constants ... 34
string extraction (internationalization) ... 160
string operators ... 80
string-matching operators ... 24
strings ... 283
strings, converting ... 77
strings, converting, numbers to ... 108, 109, 148
strings, empty, See null strings ... 37
strings, extracting ... 160
strings, for localization ... 158
strings, length of ... 73
strings, merging arrays into ... 190
strings, `NODE` internal type ... 283
strings, null ... 44
strings, numeric ... 85
strings, splitting ... 132
`strtonum` function (`gawk`) ... 133
`strtonum` function (`gawk`), `--non-decimal-data` option and ... 165
`sub` function ... 75, 133
`sub` function, arguments of ... 134
`sub` function, escape processing ... 136
subscript separators ... 109
subscripts in arrays, multidimensional ... 122
subscripts in arrays, multidimensional, scanning ... 124
subscripts in arrays, numbers as ... 121

subscripts in arrays, uninitialized variables as 122
`SUBSEP` variable 109
`SUBSEP` variable, multidimensional arrays 122
`substr` function 136
Sumner, Andrew 278
`switch` statement 102
syntactic ambiguity: `/=` operator vs. `/=.../` regexp constant 83
`system` function 141
`systime` function (`gawk`) 143

T

tandem 275
Tcl 182
TCP/IP 168
TCP/IP, support for 69
`tee` utility 223
`tee.awk` program 223
terminating records 38
`testbits.awk` program 148
Texinfo 6, 181, 230, 240, 262, 280
Texinfo, chapter beginnings in files 27
Texinfo, extracting programs from source files 240
text, printing 57
text, printing, unduplicated lines of 224
`textdomain` function (C library) 156
`TEXTDOMAIN` variable 110, 158
`TEXTDOMAIN` variable, `BEGIN` pattern and 159
`TEXTDOMAIN` variable, portability and 161
tilde (`~`), `~` operator .. 24, 32, 34, 74, 86, 87, 91, 94
time, alarm clock example program 231
time, localization and 158
time, managing 190
time, retrieving 142
timestamps 142, 143
timestamps, converting dates to 143
timestamps, formatted 190
`tmp_number` internal function 284
`tmp_string` internal function 284
`tolower` function 136
`toupper` function 136
`tr` utility 233
`translate.awk` program 234
troubleshooting, `--non-decimal-data` option .. 175
troubleshooting, `-F` option 180
troubleshooting, `==` operator 86
troubleshooting, `awk` uses `FS` not `IFS` 43
troubleshooting, backslash before nonspecial character 26
troubleshooting, division 79
troubleshooting, fatal errors, field widths, specifying 47
troubleshooting, fatal errors, `printf` format strings 64
troubleshooting, `fflush` function 140
troubleshooting, function call syntax 90
troubleshooting, `gawk` 180, 279
troubleshooting, `gawk`, bug reports 276
troubleshooting, `gawk`, fatal errors, function arguments 127
troubleshooting, `getline` function 195
troubleshooting, `gsub`/`sub` functions 134
troubleshooting, `match` function 132
troubleshooting, `print` statement, omitting commas 58
troubleshooting, printing 67
troubleshooting, quotes with file names 68
troubleshooting, readable data files 194
troubleshooting, regexp constants vs. string constants 34
troubleshooting, string concatenation 80
troubleshooting, `substr` function 136
troubleshooting, `system` function 141
troubleshooting, typographical errors, global variables 175
true, logical 85
Trueman, David 4, 9, 258
trunc-mod operation 79
truth values 85
type conversion 77
`type` internal variable 283

U

undefined functions 153
underscore (`_`), `_` C macro 157
underscore (`_`), in names of private variables .. 182
underscore (`_`), translatable string 159
undocumented features 180
uninitialized variables, as array subscripts 122
`uniq` utility 224
`uniq.awk` program 225
Unix 307
Unix `awk`, backslashes in escape sequences 26
Unix `awk`, `close` function and 72
Unix `awk`, password files, field separators and .. 46
Unix, `awk` scripts and 13
unsigned integers 295
`update_ERRNO` internal function 285
user database, reading 201
user-defined, functions 149
user-defined, functions, counts 171
user-defined, variables 76
user-modifiable variables 107
users, information about, printing 219
users, information about, retrieving 201
`USR1` signal 172

V

values, numeric ... 295
values, string ... 295
variable typing ... 85
variables ... 22, 295
variables, assigning on command line ... 76
variables, built-in ... 76, 107
variables, built-in, `-v` option, setting with ... 174
variables, built-in, conveying information ... 110
variables, flag ... 88
variables, `getline` command into, using ... 52, 53, 55
variables, global, for library functions ... 181
variables, global, printing list of ... 175
variables, initializing ... 76
variables, names of ... 116
variables, private ... 181
variables, setting ... 174
variables, shadowing ... 150
variables, types of ... 81
variables, types of, comparison expressions and ... 85
variables, uninitialized, as array subscripts ... 122
variables, user-defined ... 76
vertical bar (`|`) ... 28
vertical bar (`|`), `|` operator (I/O) ... 54, 91
vertical bar (`|`), `|&` I/O operator (I/O) ... 166
vertical bar (`|`), `|&` operator (I/O) ... 55, 91
vertical bar (`|`), `|&` operator (I/O), two-way communications ... 169
vertical bar (`|`), `||` operator ... 88, 91
`vname` internal variable ... 283

W

`w` utility ... 47
Wall, Larry ... 291
warnings, issuing ... 175
`wc` utility ... 228
`wc.awk` program ... 228
Weinberger, Peter ... 4, 258
`while` statement ... 24, 100
whitespace, as field separators ... 43
whitespace, functions, calling ... 127
whitespace, newlines as ... 176
Williams, Kent ... 258
Woods, John ... 258
word boundaries, matching ... 31
word, regexp definition of ... 31
word-boundary operator (`gawk`) ... 31
`wordfreq.awk` program ... 238
words, counting ... 228
words, duplicate, searching for ... 230
words, usage counts, generating ... 237

X

`xgettext` utility ... 160
XOR bitwise operation ... 147
`xor` function (`gawk`) ... 147

Z

Zaretskii, Eli ... 9
zero, negative vs. positive ... 298
`zerofile.awk` program ... 195
Zoulas, Christos ... 258